
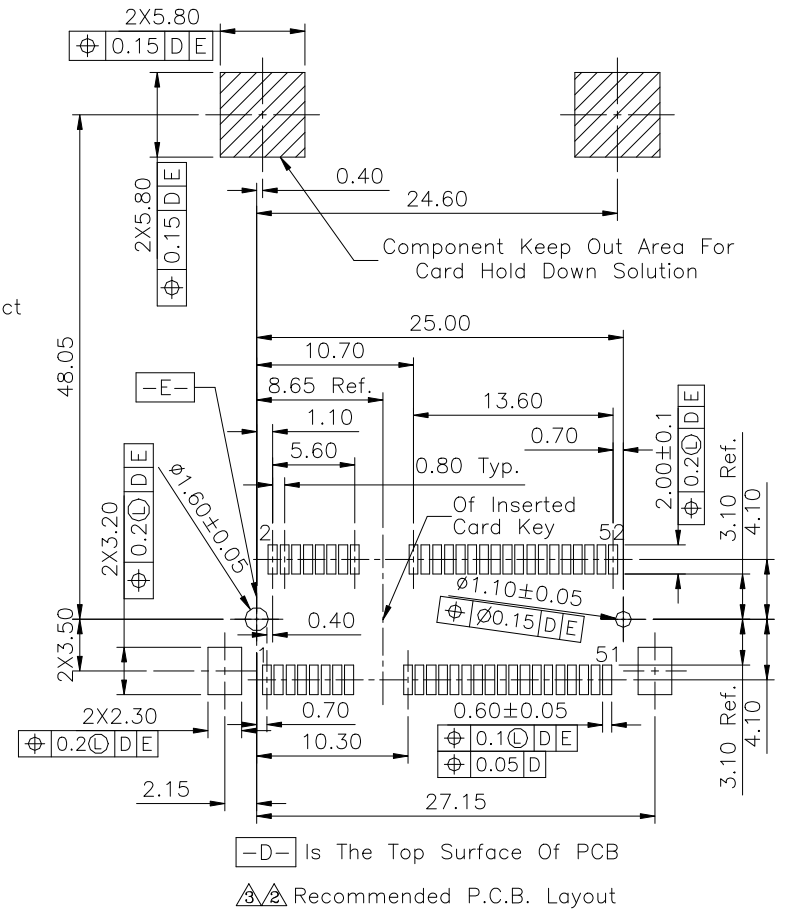
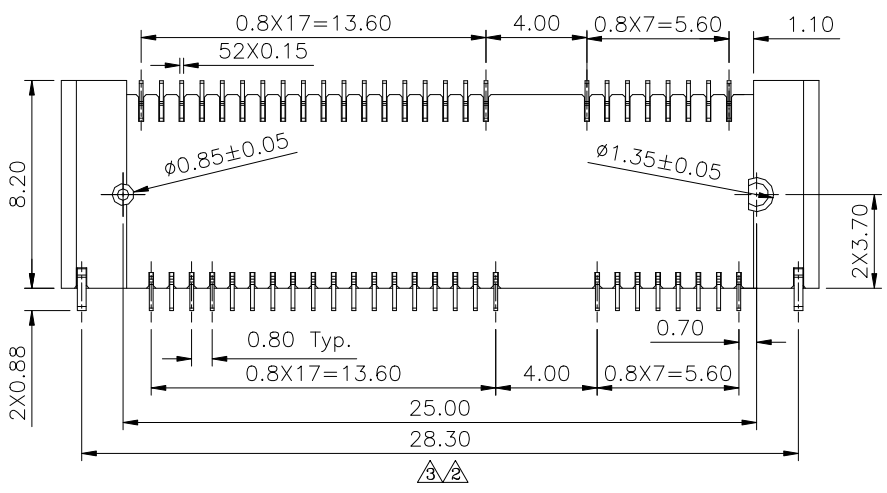
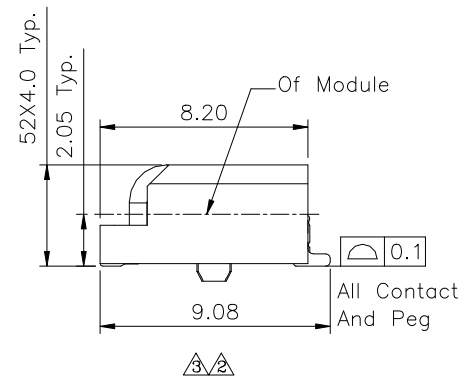
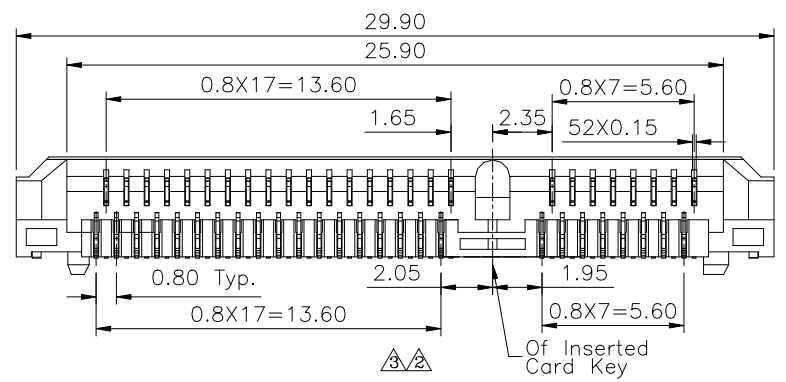


△△ SPECIFICATION
 Current Rating:0.5A Max.
 Voltage Rating:50V AC RMS
 Dielectric Withstanding Voltage:300V AC For Minute
 Contact Resistance:55 Milliohms Max.
 Insulation Resistance:500 Megaohms Min. At 500V DC
 Operation Temperature:-55°C~+80°C
 Housing:LCP(UL94V-0),Black
 Terminal:Phosphor Bronze,Gold Flash Over Nickel
 Peg:Brass
 RoHS Compliant

△△ MPCIE 52 W 40 - R6H5 - H
 (1) (2) (3) (4) (5) (6)
 (1) MPCIE:0.8 Mini PCI Express Edge Slot
 (2) 52:No. Of Position
 (3) W:SMT Right Angle
 (4) 40:Height 4.0mm
 (5) R6H5:Tape & Reel 650 PCS/Reel
 (6) H:RoHS Compliant

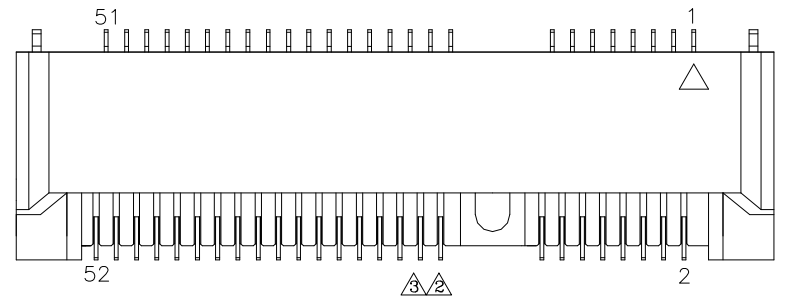

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
PART No. △△△ MPCIE52W40-R6H5-H		MEI		X. ±0.40 X.* ±7.0°		△ A3	Modify P/N: MPCIE52W40-R9H-H	HZF	03/31/2016
DRAWING No. MPCIE52W40-R6H5-H		CHECKED BY HZF		△.X ±0.30 .X.* ±4.0°		△ A2	Modify P/N: MPCIE52W40-R6H-H	HZF	03/20/2013
SCALE NONE		DRAWING BY CYP		.XX ±0.20 .XX.* ±3.0°		△ A1	Modify P/N: MPCIE52W40-R9H-H	HZF	06/25/2010
REV. A3		UNIT mm		.XXX ±0.15 .XXX.* ±1.5°		△ A0	NEW RELEASE	HZF	09/09/2009
NO. REV.		REVISONS		CHK		DATE			