
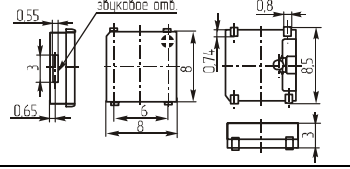

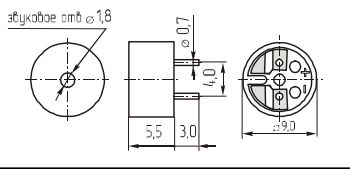


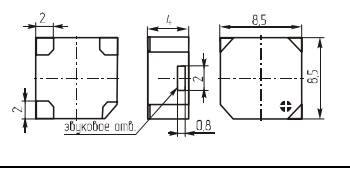

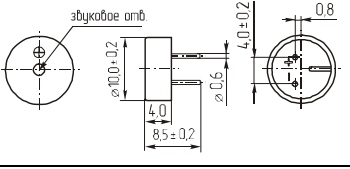
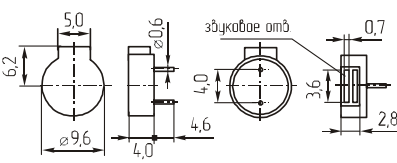


1.3.1 Звонки магнитоэлектрические

Принятые обозначения в магазине КВАРЦ	Параметры					
	Размер, мм	Напряжение, В	Сопротивление, Ом	Ток потребления, мА	Интенсивность звука, дБ, не менее	Резонансная частота, Гц
ЗМ 6х 4		1,5(1~2)	5,5			
		3(2~4)	16			
		5(4~6)	25			
ЗМ 8х 8х3		3,6(2,5~4,5)	16	80	88	2,7
ЗМ 9х 4м11		1,5(1~2)	5,5	80	87	2,731
		1,5(1~2)	5,5	80	83	2,731
ЗМ 9х 5		1,5(1~2)	5,5	70	85	2,731
		1,5(1~2)	5,5	80	80	2,731
		1,5(1~2)	6	80	85	2,731
		3(2~4)	15	90	88	2,65
		3(2~4)	15	80	85	2,731
		5(4~7)	40	70	87	3,2
ЗМ 9х 6		1,5(1~2)	5,5	80	80	3,1
		5(4~7)	40	80	85	2,4
ЗМ 9х 7		5(4~7)	40	87	87	3,2
ЗМ 9х 9х4		3,6(3~4,2)	16	100	90	3
		3,6(3~5)	20	90	88	2,65
ЗМ 10х 3м11		1,5(1~2)	5,5	80	85	2,731
ЗМ 10х 4		1,5(1~2)	6		80	2,731
		1,5(1~2)	6	80	85	3,2
		5(4~8)	43	60	85	2,731
		5(4~6)	45		60	2,731
ЗМ 10х 4м11		1,5(1~2)	6	80	85	2,731
		1,5(1~2)	6	80	85	3,1
		1,5(1~2)	6	80	85	3,2