




MODEL NO.3296

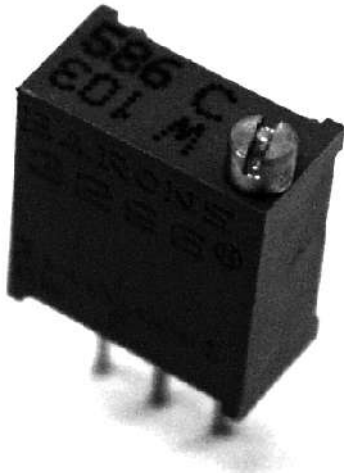

FEATURES :



- 3/8" Square Shape
- Cermet/ Industrial/ Sealed
- Multiturn Adjust
- Vertical/ Horizontal Adjust Types Available
- Low PCB Profile (P Model) - Only 1/5" High

HOW TO ORDER

	3296	W	-103
Model			
Style			
Resistance Code			

OUTLINE DRAWING & DIMENSIONS (mm)

Standard Resistance Table	
Resistance (Ω)	Resistance Code
10	100
20	200
50	500
100	101
200	201
500	501
1,000	102
2,000	202
5,000	502
10,000	103
20,000	203
50,000	503
100,000	104
200,000	204
500,000	504
1,000,000	105
2,000,000	205

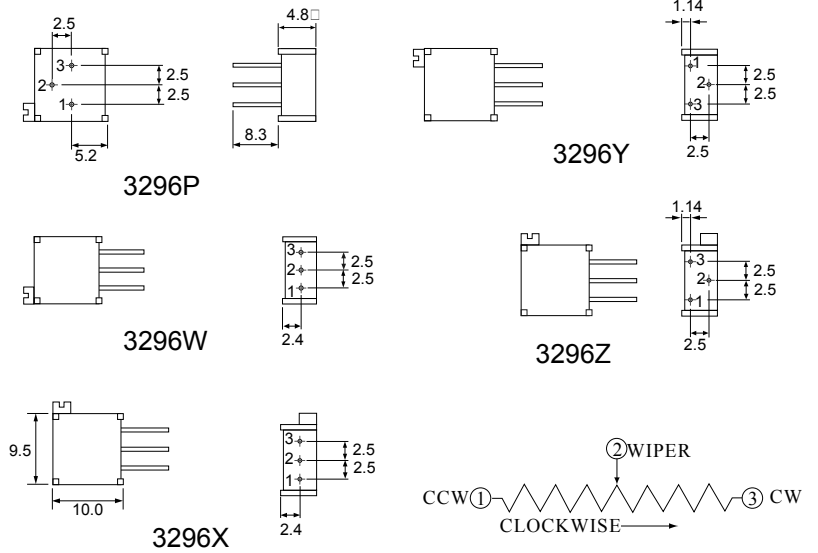

Electrical Characteristics

Power Rating 0.5W @70°C 0W @125°C
Resistance Range 10 Ω ~2M Ω
Insulation Resistance 1G Ω
Contact Resistance Variation2% or 20 Ω
End Resistance1% or 2 Ω
Max. Operating Voltage300V _{AC}

Mechanical Characteristics

Effective Electrical Travel (Turns)25
Rotational Torque \leq 35mNm

Environmental Characteristics

Operating Temperature Range-55°C ~ +125°C
Temperature Coefficient \pm 100ppm/°C