


PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
COM1	COM1		T1	1A	2A	3A	4A	5A	6A	T5	6F	5F	4F	3F	2F	1F		
COM2		COM2	T2	1B	2B	3B	4B	5B	6B	T6	6G	5G	4G	3G	2G	1G		
COM3			T3	1C	2C	3C	4C	5C	6C	T7	6E	5E	4E	3E	2E	1E	COM3	
COM4			T4	DP1	DP2	DP3	DP4	DP5	DP6	T8	6D	5D	4D	3D	2D	1D	COM4	

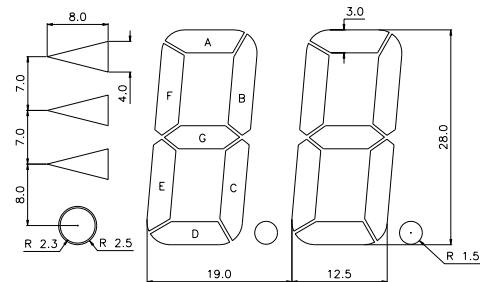

NOTES:

1. TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.20
2. VIEWING ANGLE: 12:00 O'CLOCK
3. DISPLAY MODE: POSITIVE, TRANSFLECTIVE, TN TYPE
4. DUTY CYCLE: 1/4, BIAS: 1/3
5. DRIVING VOLTAGE: 3.0V
6. OPERATING TEMPERATURE: 0°C TO 55°C
7. STORAGE TEMPERATURE: -15°C TO 60°C

AZ DISPLAYS, INC.		
DRAWN BY: L.H.B	TITLE: GD-458P	SCALE: FREE
CHECKED BY: W.L.L		UNIT: mm
APP BY:		SIZE: A4
DATE: 97.1.9	SHEET 1	OF 1