



Low Dropout Dual Voltage Regulator


The LM2935 is a dual positive 5.0 V low dropout voltage regulator, designed for standby power systems. The main output is capable of supplying 750 mA for microprocessor power, and can be turned "on" and "off" by the switch/reset input. The other output is dedicated for standby operation of volatile memory, and is capable of supplying up to 10 mA loads. The total device features a low quiescent current of 3.0 mA or less when supplying 10 mA from the standby output.

This part was designed for harsh automotive environments and is therefore immune to many input supply voltage problems such as reverse battery (-12 V), double battery (+24 V), and load dump transients (+60 V).


- Two Regulated 5.0 V Outputs
- Main Output Current in Excess of 750 mA
- On/Off Control of Main Output
- Standby Output Current in Excess of 10 mA
- Low Input/Output Differential of Less than 0.6 V at 500 mA
- Short Circuit Current Limiting
- Internal Thermal Shutdown
- Low Voltage Indicator Output
- Designed for Automotive Environment Including
 - Reverse Battery Protection
 - Double Battery Protection
 - Load Dump Protection
 - Reverse Transient Protection
- Economical 5–Lead TO–220 Package with Two Optional Leadforms
- Also Available in Surface Mount D²PAK Package

ORDERING INFORMATION

Device	Operating Temperature Range	Package		
LM2935D2T		Surface Mount		
LM2935T	$T_{1} = 40^{\circ} t_{0.1} 125^{\circ}C_{0.1}$	Plastic Power		
LM2935TH	T _J = -40° to +125°C	Horizontal Mount		
LM2935TV		Vertical Mount		

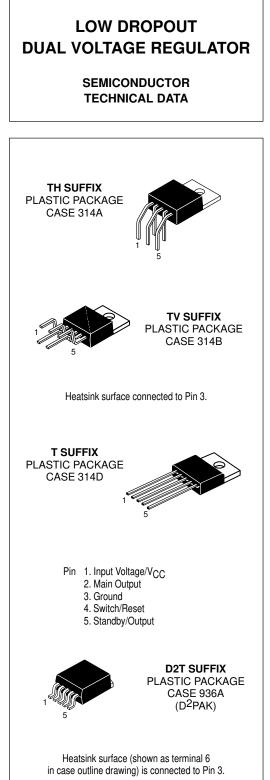

Typical Application Circuit

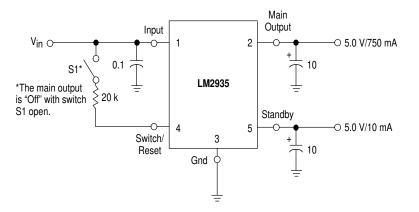

An input bypass capacitor is recommended if the regulator is located more than 4" from the supply input filter. The LM2935 is not internally compensated and thus requires an external output capacitor for stability. A minimum capacitance of 10 μF is recommended. The actual capacitance value is dependent upon load current, temperature, and the capacitor's equivalent series resistance (ESR). The least stable condition is encountered at maximum load current and minimum ambient temperature.

This device contains 29 active transistors.

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Input Voltage Continuous	VI	60	Vdc
Transient Reverse Polarity Input Voltage 1.0% Duty Cycle, $\tau \le 100 \text{ ms}$	VI(τ)	-50	Vpk
Switch/Reset Input Current	l _{in}	5.0	mA
Power Dissipation Case 314A, 314B and 314D (TO–220 Type) $T_A = 25^{\circ}C$ Thermal Resistance, Junction–to–Ambient Thermal Resistance, Junction–to–Case Case 936A (D ² PAK) $T_A = 25^{\circ}C$ Thermal Resistance, Junction–to–Ambient Thermal Resistance, Junction–to–Case	P _D R _θ JA R _θ JC PD R _θ JA R _θ JC	Internally Limited 65 5.0 Internally Limited Per Figure 1 5.0	W °C/W °C/W °C/W °C/W
Operating Junction Temperature Range	Тj	-40 to +150	°C
Storage Temperature Range	T _{stg}	-65 to +150	°C

$\textbf{ELECTRICAL CHARACTERISTICS} (V_{in} = 14 \text{ V}, \text{ I}_{O} = 500 \text{ mA}, \text{ I}_{stby} = 0 \text{ mA}, \text{ C}_{O} = 10 \text{ }\mu\text{F}, \text{ C}_{stby} = 10 \text{ }\mu\text{F}, \text{ T}_{J} = 25^{\circ}\text{C} \text{ [Note 1].} \text{ (Note 1].} \text{ (N$

Characteristic	Symbol	Min	Тур	Max	Unit
MAIN OUTPUT		-			
Output Voltage (V _{in} = 6.0 V to 26 V, I _O = 5.0 mA to 500 mA, T _J = -40 to $+125^{\circ}$ C)	VO	4.75	5.0	5.25	V
Line Regulation $V_{in} = 9.0 \text{ V}$ to 16 V, I _O = 5.0 mA $V_{in} = 6.0 \text{ V}$ to 26 V, I _O = 5.0 mA	Reg _{line}		4.0 10	25 50	mV
Load Regulation (I _O = 5.0 mA to 500 mA)	Regload	-	10	50	mV
Output Impedance $I_O = 500$ mAdc and 10 mArms, f = 100 Hz to 10 kHz	ZO	_	200	-	mΩ
Output Noise Voltage (f = 10 Hz to 100 kHz)	Vn	-	100	-	μVrms
Long Term Stability	S	-	20	_	mV/kHR

ELECTRICAL CHARACTERISTICS (Vin = 14 V, IO = 500 mA, Istb	_{by} = 0 mA, C _O = 10 μF, C _{stby} = 10 μF, T _J = 25°C [Note 1].)
---	---

,					
Characteristic	Symbol	Min	Тур	Max	Unit
MAIN OUTPUT (continued)					
Ripple Rejection (f = 120 Hz)	RR	-	66	-	dB
Dropout Voltage $I_O = 500 \text{ mA}$ $I_O = 750 \text{ mA}$	VI-VO		0.45 0.82	0.6	V
Short Circuit Current Limit	ISC	0.75	1.2	-	А
Over–Voltage Shutdown Threshold	V _{th(OV)}	26	31	-	V
SWITCH/RESET		-			
Output Sink Current (V _{OL} = 1.2 V)	ISink	-	5.0	-	mA
Output Voltage ($R_{on/off}$ = 20 k Ω) Low State, V _{in} = 4.0 V High State, V _{in} = 14 V	V _{OL} V _{OH}	_ 4.5	0.9 5.0	1.2 6.0	V
Output Pull–Up Resistor, "On"/"Off" (Note 2)	R _{on/off}	-	20	30	kΩ
Output Voltage with Reverse Polarity Input (V _{in} = -15 V, R _L = 10Ω)	-V _O	-0.6	0	-	V


 $\textbf{ELECTRICAL CHARACTERISTICS} \text{ (V}_{in} = 14 \text{ V}, \text{ I}_{O} = 0 \text{ mA}, \text{ I}_{stby} = 10 \text{ mA}, \text{ C}_{O} = 10 \text{ }\mu\text{F}, \text{ C}_{stby} = 10 \text{ }\mu\text{F}, \text{ T}_{J} = 25^{\circ}\text{C} \text{ [Note 1]}.)$


Characteristic	Symbol	Min	Тур	Мах	Unit
STANDBY OUTPUT					
Output Voltage (V _{in} = 6.0 V to 26 V, I _{stby} = 1.0 mA to 10 mA, T_J = -40 to +125°C)	V _{O(stby)}	4.75	5.0	5.25	V
Tracking Voltage	V _O -V _{O(stby)}	-200	0	200	mV
Line Regulation (V _{in} = 6.0 V to 26 V)	Reg _{line}	-	4.0	50	mV
Load Regulation (I _{stby} = 1.0 mA to 10 mA)	Regload	-	10	50	mV
Output Impedance I(stby) = 10 mAdc and 1.0 mArms, f = 100 Hz to 10 kHz	Z _{O(stby)}	-	1.0	-	Ω
Output Noise Voltage (f = 10 Hz to 100 kHz)	Vn	-	300	-	μVrms
Long Term Stability	S	-	20	-	mV/kHR
Ripple Rejection (f = 120 Hz)	RR	-	66	-	dB
Dropout Voltage (I _{Stby} = 10 mA)	VI-VO(stby)	-	0.55	0.7	V
Short Circuit Current Limit	ISC	25	70	-	mA
Output Voltage with Reverse Polarity Input $V_{in} = -15 \text{ V}, \text{ R}_{L} = 510 \Omega$	-VO	-0.3	0	_	V
Output Voltage with Maximum Positive Input V_{in} = 60 V, R _L = 510 Ω	V _{O(max)}	-	5.0	6.0	V
TOTAL DEVICE					
Bias Current $I_O = 10 \text{ mA}, I_{stby} = 0 \text{ mA}$ $I_O = 500 \text{ mA}, I_{stby} = 0 \text{ mA}$ $I_O = 750 \text{ mA}, I_{stby} = 0 \text{ mA}$ Main Output "Off", I _{stby} = 10 mA	Ι _Β	- - -	3.0 40 90 2.0	- 100 - 3.0	mA


NOTES: 1. Low duty cycle pulse techniques are used during test to maintain junction temperature as close to ambient as possible.

2. The maximum switch/reset current must not exceed 5.0 mA.


TYPICAL CIRCUIT WAVEFORMS

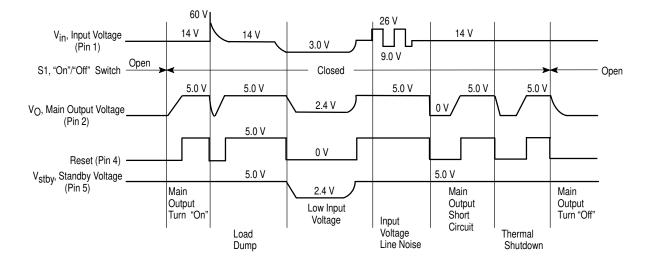




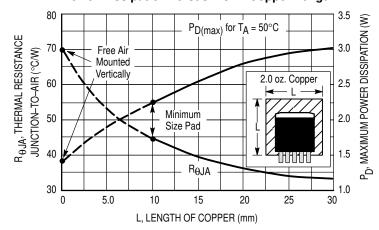

OUTLINE DIMENSIONS

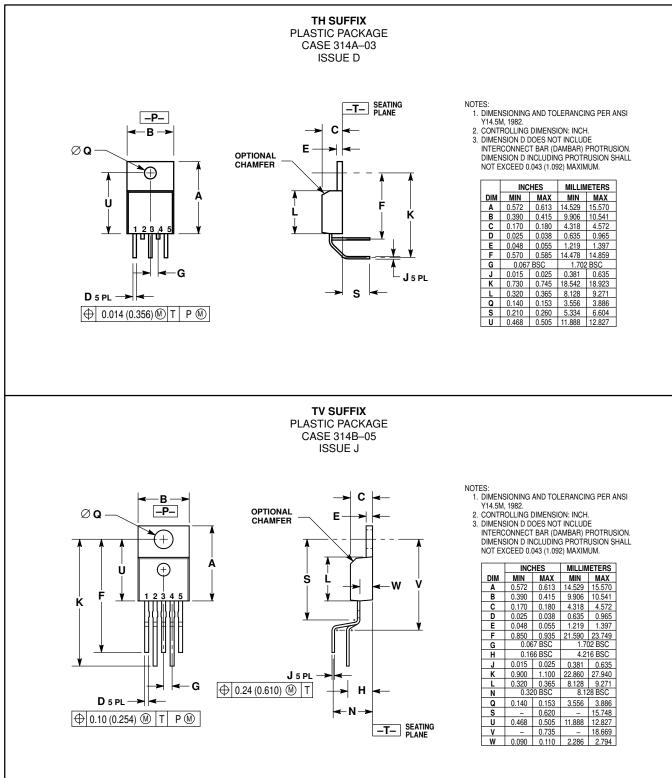

OUTLINE DIMENSIONS

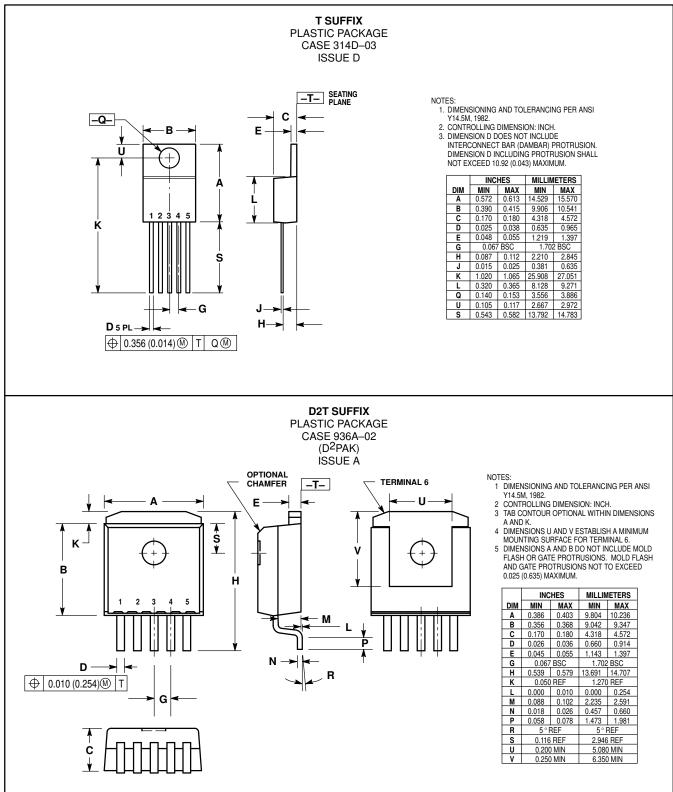

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and **(Motorola**, are registered trademarks of Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036. 1–800–441–2447 or 602–303–5454

MFAX: RMFAX0@email.sps.mot.com - TOUCHTONE 602-244-6609 INTERNET: http://Design-NET.com



JAPAN: Nippon Motorola Ltd.; Tatsumi–SPD–JLDC, 6F Seibu–Butsuryu–Center, 3–14–2 Tatsumi Koto–Ku, Tokyo 135, Japan. 03–81–3521–8315

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298



This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.