


KP-66F SERIES ALARM

Model No	KP-66F
Voice Coil Impedance	4/8/12 Ohm (at 1 KHz)
Voice Coil Dimen(Dia.)	Ø25.4 mm
Rated Voltage	12 VDC
Operating Voltage	6~15VDC
Min. S.P. L	105dB at 12VDC/1m
Max. Rated Current	650 mA at 12VDC
Flash Stroble Resonant Frequency	1-2HZ
Tone Nature	Warble/continuous
Operating Temperature	-20~+60 °C
Weight	1125±20g




color Black
Stainless Steel Housing
Lead Terminal


DIMENSIONS



Top View



Side View



Side View

all dimensions are in mm

* Value applying at rated voltage

KPS-108S SERIES ALARM

Model No	KPS-108S
Piezo Diaphragm	Single Piezo
Piezo (Dia.)	Ø50 mm
Rated Voltage	12 VDC
Operating Voltage	6~14VDC
Min. S.P. L	108±2dB at 12VDC/1m
Max. Rated Current	710 mA at 12VDC
Tone Nature	Siren
Operating Temperature	-20~+60 °C
Weight	720g




Color White
Metal Housing Material
Lead Terminal

DIMENSIONS

Top View

Side View

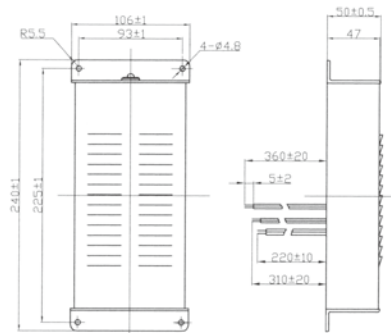

all dimensions are in mm

* Value applying at rated voltage

KPS-108 SERIES ALARM

Model No	KPS-108
Piezo Diaphragm	Two Piezo
Piezo (Dia.)	Ø50 mm
Rated Voltage	12 VDC
Operating Voltage	6~14VDC
Min. S.P. L	115±2 dB at 12VDC/1m
Max. Rated Current	1400mA at 12VDC
Tone Nature	Siren
Operating Temperature	-20~+60 °C
Weight	1300g




Color White
Metal Housing Material
Lead Terminal

DIMENSIONS

Top View

Side View

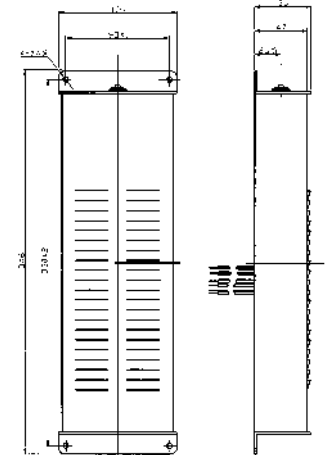

all dimensions are in mm

* Value applying at rated voltage

The information contained herein is believed to be correct, but no guarantee for accuracy, completeness PO Electronics Ltd reserves the right to make changes without notification.