



## 快恢复二极管 Fast Recovery Rectifier


## ■ 特征 Features

- $I_{f0}$  1.0A
- VRM 50V-1000V
- 耐正向浪涌电流能力高
- High surge current capability

## ■ 用途 Applications

- 整流用 Rectifier

## ■ 外形尺寸和印记 Outline Dimensions and Mark

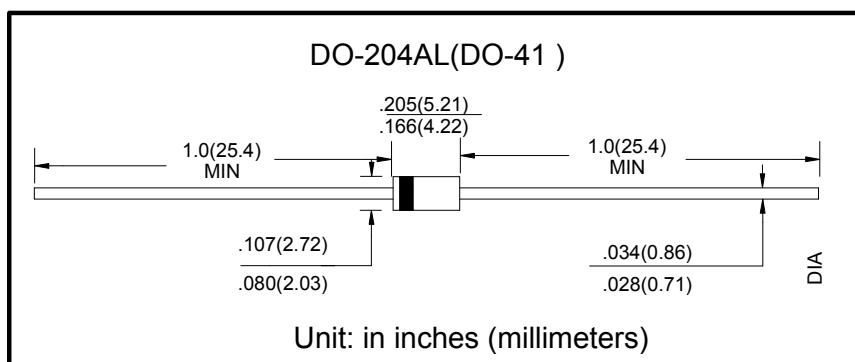

## ■ 极限值 (绝对最大额定值)

## Limiting Values (Absolute Maximum Rating)

参数名称 Item	符号 Symbol	单位 Unit	条件 Conditions	FR						
				101	102	103	104	105	106	107
反向重复峰值电压 Repetitive Peak Reverse Voltage	$V_{RRM}$	V		50	100	200	400	600	800	1000
正向平均电流 Average Forward Current	$I_{F(AV)}$	A	正弦半波 60Hz, 电阻负载 $T_a=60^\circ\text{C}$ 60Hz Half-sine wave, Resistance load, $T_a=60^\circ\text{C}$							1.0
正向(不重复)浪涌电流 Surge(Non-repetitive)Forward Current	$I_{FSM}$	A	正弦半波 60Hz, 一个周期, $T_a=25^\circ\text{C}$ 60Hz Half-sine wave, 1 cycle, $T_a=25^\circ\text{C}$							30
结温 Junction Temperature	$T_J$	$^\circ\text{C}$								-55~+125
储存温度 Storage Temperature	$T_{STG}$	$^\circ\text{C}$								-55 ~ +150

■ 电特性 ( $T_a=25^\circ\text{C}$  除非另有规定)Electrical Characteristics ( $T_a=25^\circ\text{C}$  Unless otherwise specified)

参数名称 Item	符号 Symbol	单位 Unit	条件 Conditions	FR						
				101	102	103	104	105	106	107
正向峰值电压 Peak Forward Voltage	$V_{FM}$	V	$I_{FM}=1.0\text{A}$							1.3
反向峰值电流 Peak Reverse Current	$I_{RRM1}$	$\mu\text{A}$	$V_{RM}=V_{RRM}$	$T_a=25^\circ\text{C}$						2.5
	$I_{RRM2}$			$T_a=125^\circ\text{C}$						100
反向恢复时间 Reverse Recovery time	$t_{rr}$	ns	$I_F=0.5\text{A}$ $I_R=1\text{A}$ $I_{RR}=0.25\text{A}$			150		250		500
热阻(典型) Thermal Resistance(Typical)	$R_{\theta J-A}$	$^\circ\text{C}/\text{W}$	结和环境之间 Between junction and ambient							50
	$R_{\theta J-L}$		结和引线之间 Between junction and lead							25
结电容 Typical junction capacitance	$C_j$	pF	Measured at 1MHZ and Applied Reverse Voltage of 4.0 V.D.C.							20



## ■特性曲线(典型) Characteristics(Typical)

FIG.1 正向电流降额曲线  
FORWARD CURRENT DERATING CURVE

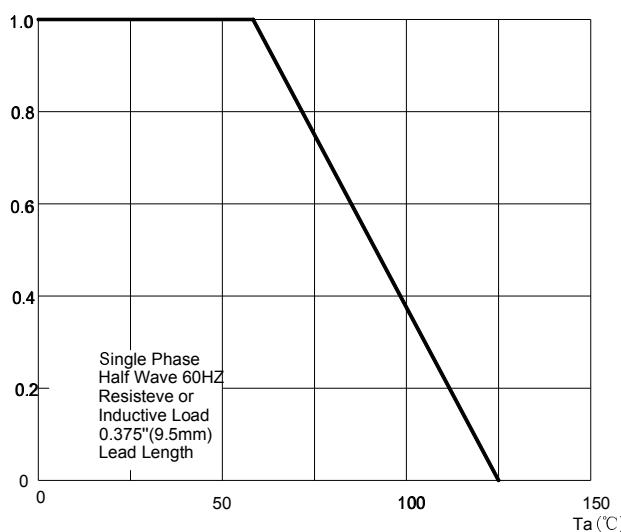


FIG.3 典型正向特性曲线  
TYPICAL FORWARD CHARACTERISTICS

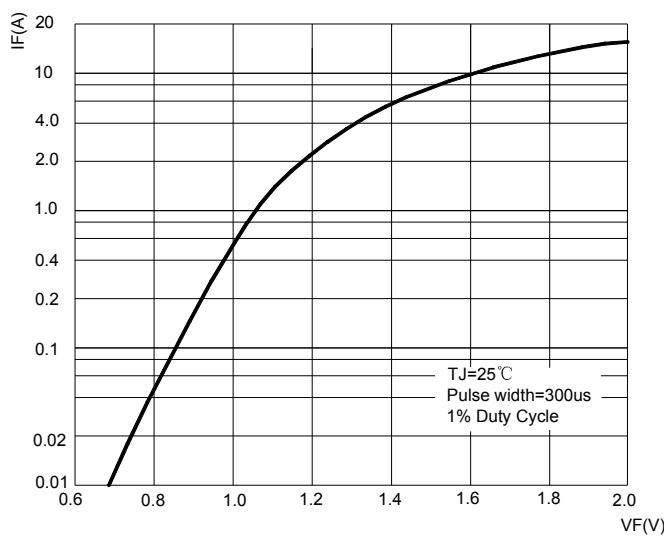


FIG.2 最大正向浪涌冲击耐受力  
MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

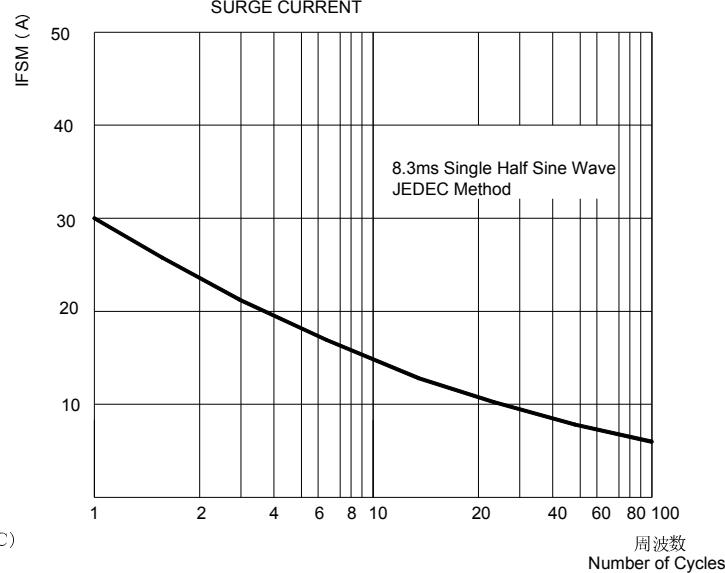


FIG.4 典型反向特性曲线  
TYPICAL REVERSE CHARACTERISTICS

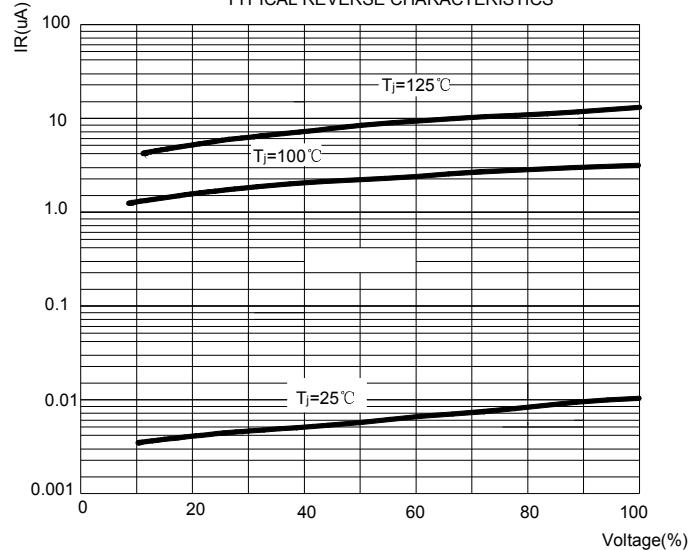


FIG.5 反向恢复时间试验电路及测试波形示意图  
Diagram of circuit and Testing wave form of reverse recovery time

