

Specification for Transducer	Page	2/12
	Revision No.	1.0
	Drawing No.	OEM9838R
Model No. : KPT-G1301P22-K9838		

CONTENTS

1. Scope
范围
2. General
概要
3. Electrical and Acoustic Characteristics.
电声参数
4. Reliability Test
可靠性试验
5. Measurement Block Diagram & Response curve
测试图和曲线图
6. Structure
结构
7. Dimensions
尺寸
8. Packing
包装
9. Cautions
警告
10. Cautions for Use
注意事项
11. Revision
履历表

Specification for Transducer	Page	3/12
	Revision No.	1.0
	Drawing No.	OEM9838R
Model No. : KPT-G1301P22-K9838		

1. Scope

This product specification is applied to the piezoelectric sounder in alarm systems. Please contact us when using this product for any other applications than described in the above.

本规格书适用于压电式声响器，通常它用在系统中做报警或提示的声响器用，如果将该产品用于其它领域，请与我们联系。

2. General

2.1 Out-Diameter : Ø12.2 mm

外径: Ø12.2 mm

2.2 Height : 6.5 mm

高度: 6.5 mm

2.3 Weight : 0.6 g

重量: 0.6克

2.4 Operating Temperature range:

-20~+70°C without loss of function

工作温度: -20~+70°C

2.5 Store Temperature range:

-30~+80°C without loss of function

储藏温度: -30~+80°C

3. Electrical and Acoustic Characteristics.

Test condition : 15 ~ 35 °C, 25% ~ 85% RH, 860~1060 mbar

测试条件: 15~35 °C, 25%~85%RH, 860~1060mbar

	Items 项目	Specification 规格
1	Rated Voltage 额定电压	3Vp-p Square Wave
2	Max.Allowable Voltage 最大输入电压	30Vp-p Square Wave
3	Max.Rated Current 额定电流	1mA at 4.0KHz/3Vp-p Square Wave
4	Rated Frequency 额定频率	4.0KHz
5	Min.Sound Pressure Level 额定声压	70dB at 4.0KHz/3Vp-p Square Wave/10cm
6	Capacitance at 100Hz 电容量 (at 100Hz)	9000pF ± 30%
7	Case Material/Color 壳体材质/颜色	PBT/BLACK

Specification for Transducer	Page	4/12
	Revision No.	1.0
	Drawing No.	OEM9838R

Model No. : KPT-G1301P22-K9838

4. Reliability Test

	实验项目 Item	实验条件 Test Condition	实验后规格 Specification
1	耐冲击性 Shock	峰值加速度 490m/s^2 , 半正弦波, XYZ三个方向各3次冲击实验后, 测试声响器. Sounder shall be measured after being applied shock(490m/s^2) for each three mutually perpendicular directions to each of 3 times by half sine wave.	符合表1的要求 The measured value shall meet Table 1.
2	耐振动性 Vibration Resistant	振动频率 10~55~10 Hz, 1.5mm 全振幅, XYZ 三个方向各2小时试验后, 测试声响器. Sounder shall be measured after being applied vibration of amplitude of 1.5mm with 10 to 55 to 10Hz band of vibration frequency to each of 3 perpendicular directions for 2 hours.	
3	耐焊接性 Soldering Heat Resistance	将声响器的插针插入(插至距声响器壳体 1.5mm处为止) $+300 \pm 5^\circ\text{C}$ 的焊锡槽 3 ± 0.5 秒或 $+260 \pm 5^\circ\text{C}$ 的焊锡槽 10 ± 1 秒, 然后在常温中放置4小时后, 测试声响器. Lead terminal are immersed up to 1.5mm from sounder's body in solder bath of $+300 \pm 5^\circ\text{C}$ for 3 ± 0.5 seconds or $\pm 260 \pm 5^\circ\text{C}$ for 10 ± 1 seconds, and then sounder shall be measured after being placed in natural condition for 4 hours.	
4	抗跌落性 Dropping	100cm高度/3回自然落下. free fall from 100cm with 3 times.	
5	连续运行 continuum run	方形波 30Vp-p 4.0KHz/240 小时 Square wave 30Vp-p 4.0KHz/240hours	
6	可焊性 Solderability	先将声响器的插针浸入松香液5秒钟, 然后浸入 $+260 \pm 5^\circ\text{C}$ 熔融的锡槽中 3 ± 0.5 秒. Lead terminals are immersed in rosin for 5 seconds and then immersed in solder bath of $+260 \pm 5^\circ\text{C}$ for 3 ± 0.5 seconds.	插针表面90%以上被焊锡润湿.(插针的段面除外) 90% min. lead terminals shall be wet with solder. (Except the edge of terminal)
7	插针强度 Terminal Strength Pulling	分别在每个插针的轴向施加9.8牛顿的静荷重10秒. The force 10 seconds of 9.8N is applied to each terminal in axial direction.	插针没有断开和可见的损伤 No visible damage and cutting off

Specification for Transducer Model No. : KPT-G1301P22-K9838	Page	5/12
	Revision No.	1.0
	Drawing No.	OEM9838R

4. Reliability Test



	实验项目 Item	实验条件 Test Condition	实验后规格 Specification
8	高温放置 Dry Heat Test (Storage)	放置于温度 $+85 \pm 2^{\circ}\text{C}$ 的烘箱内240小时, 然后取出, 在常温下放置4小时后, 测试声响器。 After being placed in a chamber with $+85 \pm 2^{\circ}\text{C}$ for 240 hours and then being placed in natural condition for 4 hours, sounder shall be measured.	符合表1的要求 The measured value shall meet Table 1.
9	低温放置 Cold Test (Storage)	放置于温度 $-40 \pm 2^{\circ}\text{C}$ 的制冷箱内240小时, 然后取出, 在常温下放置4小时后, 测试声响器。 After being placed in a chamber with $-40 \pm 2^{\circ}\text{C}$ for 240 hours and then being placed in natural condition for 4 hours, sounder shall be measured.	
10	耐湿性 Humidity	放置于 90%~95% R.H., 温度 $+40 \pm 2^{\circ}\text{C}$ 的环境试验箱内240小时, 然后取出, 在常温下放置4小时后, 测试声响器。 After being placed in a chamber with 90 to 95%R.H. at $+40 \pm 2^{\circ}\text{C}$ for 240 hours and then being placed in natural condition for 4 hours, sounder shall be measured.	
11	温度循环 Temperature Cycle	先放置于温度 $-30 \pm 2^{\circ}\text{C}$ 的试验箱内30分钟, 然后放置于室温($+20^{\circ}\text{C}$)15分钟后, 放置于 $+80 \pm 2^{\circ}\text{C}$ 的试验箱内30分钟, 再放置于室温($+20^{\circ}\text{C}$)15分钟。 经过以上循环5次, 在常温下放置4小时后, 测试声响器。 After being placed in a chamber at $-30 \pm 2^{\circ}\text{C}$ for 30 minutes, sounder shall be placed at room temperature($+20^{\circ}\text{C}$). After 15 minutes at this temperature, sounder shall be placed in a chamber at $+80 \pm 2^{\circ}\text{C}$. After 30 minutes at this temperature, sounder shall be returned to room temperature ($+20^{\circ}\text{C}$) for 15 minutes. After 5 above cycles, sounder shall be measured after being placed in natural condition for 4 hours.	

表 1 Table 1

项 目 Item	试验后变化量 Specification after test
声压级 Sound Pressure Level	初始值 $\pm 10\text{dB}$ Initial Value $\pm 10\text{dB}$


Specification for Transducer	Page	6/12
	Revision No.	1.0
Model No. : KPT-G1301P22-K9838	Drawing No.	OEM9838R

5. Measurement Block Diagram & Response curve

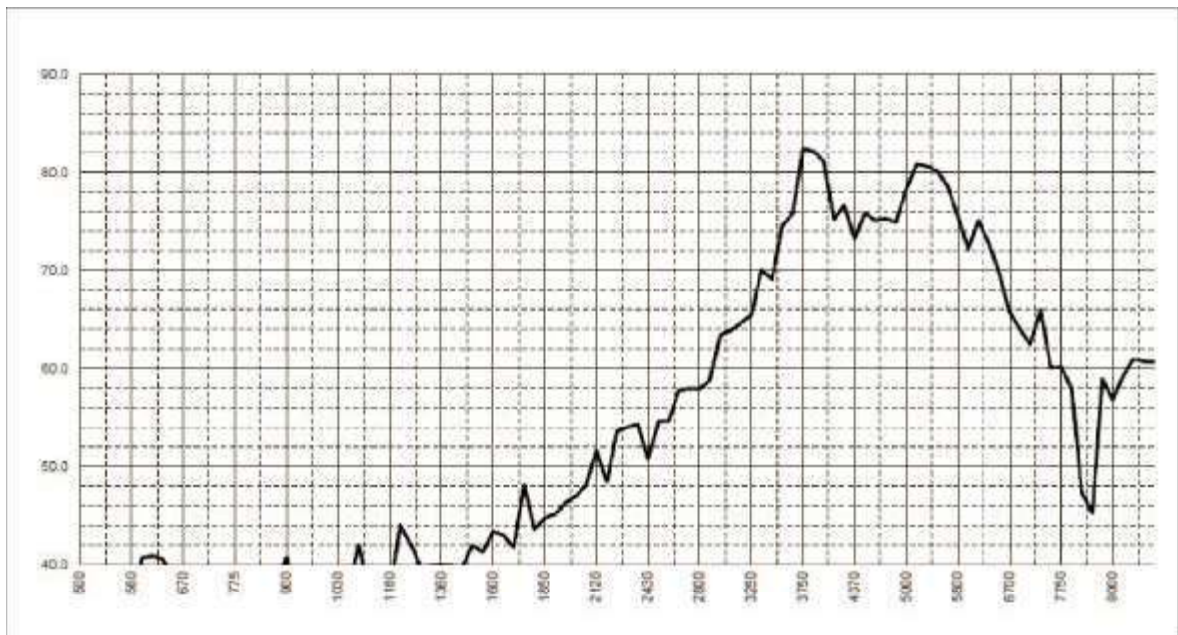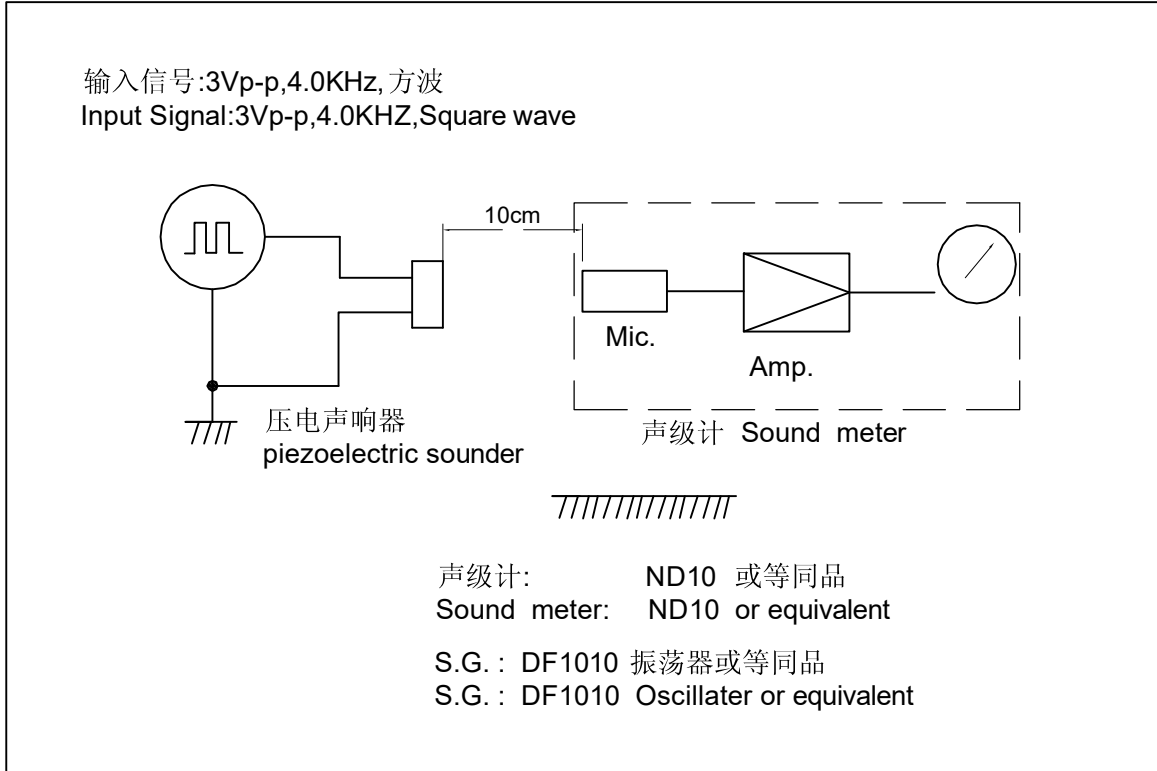

Specification for Transducer Model No. : KPT-G1301P22-K9838	Page	7/12
	Revision No.	1.0
	Drawing No.	OEM9838R



6. Structure

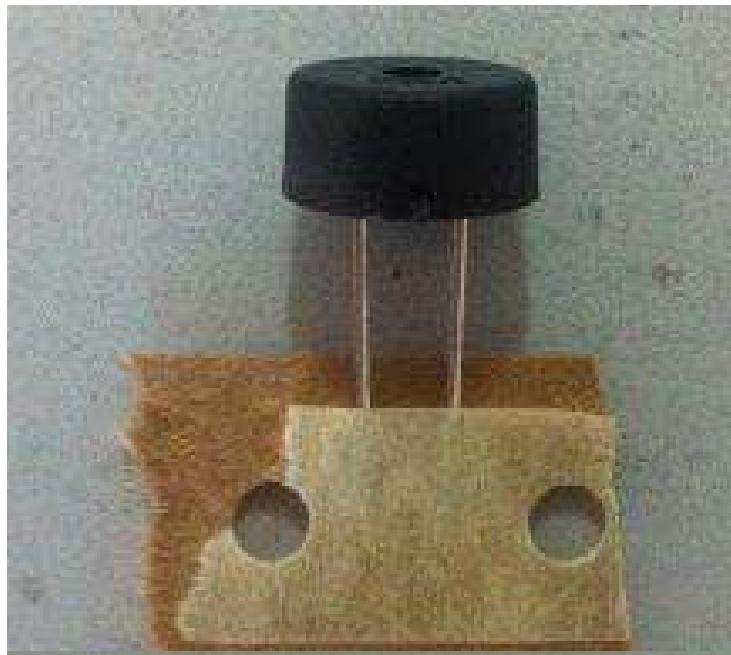

3	Case 壳体	1	PBT	
2	Element 蜂鸣片	1	SUS304	
			Piezo ceramic	
1	Pin 插针	2	0.2/QSn6.5-0.1Y4	
No.	Part Name 型号	Q'TY	Material 材质	Remarks 备注

Specification for Transducer	Page	8/12
	Revision No.	1.0
Model No. : KPT-G1301P22-K9838	Drawing No.	OEM9838R

7. Dimensions

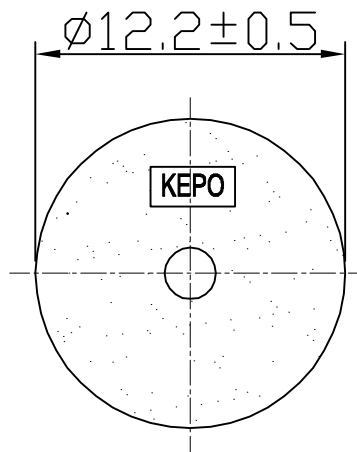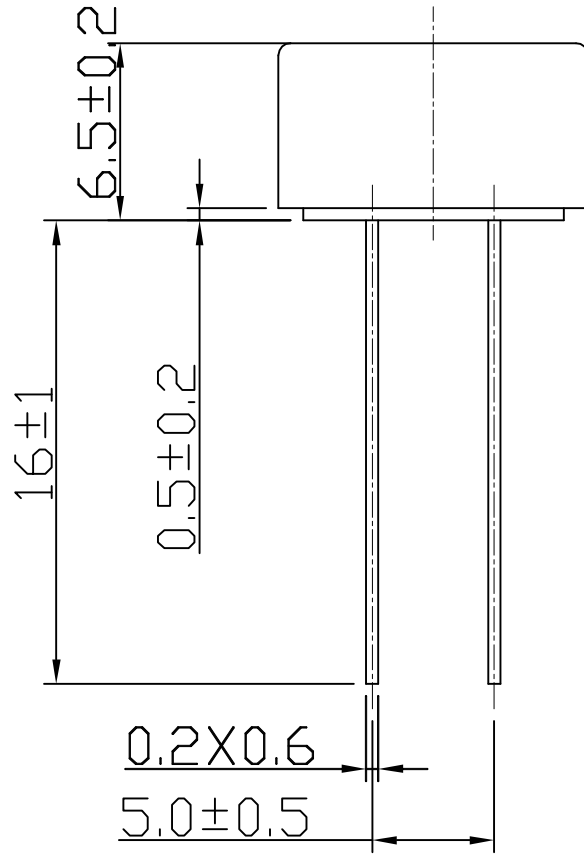

FIRST ANGLE PROJECTION



UNIT : mm
Tolerance : ± 0.5

Specification for Transducer Model No. : KPT-G1301P22-K9838	Page	9/12
	Revision No.	1.0
	Drawing No.	OEM9838R


8. 包装标准 Packaging Standard

产品的外包装是纸箱, 它应该清楚的标明型号, 数量, 出厂检验批号.
在运输及储存的过程中, 产品必须不会受到机械损伤.

Each minimum package unit of products shall be in a carton box and it shall be clearly marked with Part Number, quantity and outgoing inspection number.

There shall be no mechanical damage on products during transportation and/or in storage.

名称 Name	代号 Symbol	尺寸 Dimension	公差 Tolerance	参考 preference
产品直径 Product Diameter	D	Ø12.2	± 0.5	
产品高度 Product Height	A	6.5	± 0.2	
插针尺寸 Pin Diameter	d1	0.2X0.6	± 0.2	
产品间距 Product Distance	P	25.4	± 0.5	
纸带孔间距 Paper Tape Hole Distance	PO	12.7	± 0.2	
插针间距 Pin Distance	F	5.0	± 0.5	
偏移量 Excursion	△h	0	± 1.0	
纸带宽 Paper Tape Width	W	18.0	± 0.5	
定位间距 Orientation Distance	W1	9.0	± 0.5	
产品上限位置 Upper Limit Place	H1	26.0 max.		
产品下限位置 low limit Place	H0	18.0	± 0.5	
孔直径 Hole Diameter	DO	Ø4.0	± 0.2	
纸带厚度 Paper Tape Thickness	t	0.6	± 0.2	

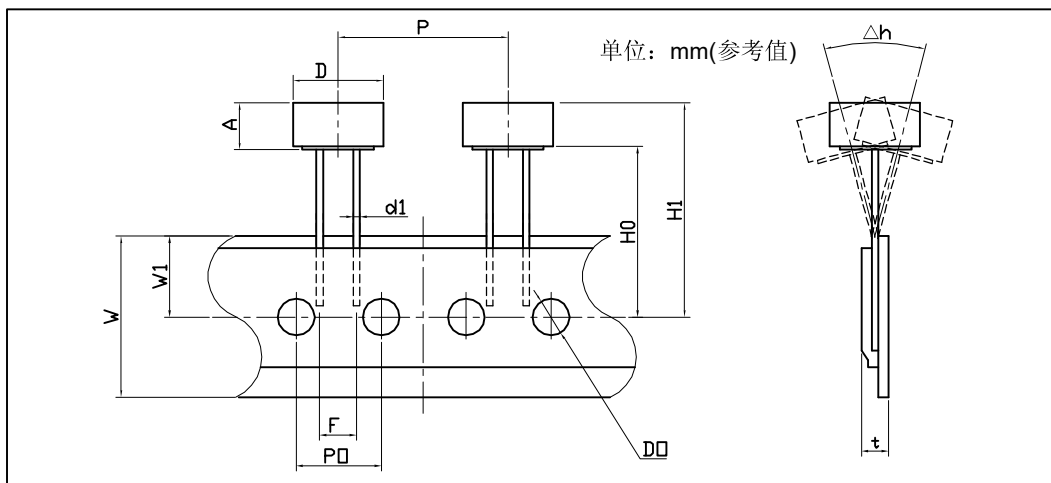

Specification for Transducer Model No. : KPT-G1301P22-K9838	Page	10/12
	Revision No.	1.0
	Drawing No.	OEM9838R



Picture 1 500PCS




Picture 2 500PCS



Picture 3 5000PCS



Picture 4 5000PCS



Picture 2

Q'TY : 500 PCS
SIZE :330x55x230mm

Q'TY:5000PCS(10 Box)
SIZE:470X340X285mm

Specification for Transducer	Page	11/12
	Revision No.	1.0
Model No. : KPT-G1301P22-K9838	Drawing No.	OEM9838R

9. 警告 Cautions

如果产品使用于下列高可靠性的装置时, 请与我们联系, 以免对人的生命, 财产和身体造成损害.

Please contact us before using our products for the undermentioned applications requiring especially high reliability in order to prevent defects which might directly cause damage to other party's life, body or property (listed below).

- (1) Aircraft equipment 飞行设备
- (2) Aerospace equipment 航天设备
- (3) Undersea equipment 潜水设备
- (4) Medical equipment 医疗设备
- (5) Transportation equipment (automobiles, trains, ships) 交通设施
- (6) Traffic signal equipment 交通信号设备
- (7) Disaster prevention/crime prevention equipment 防灾害/防犯罪设备
- (8) Data-processing equipment 数据处理设备
- (9) Applications of similar complexity or reliability requirements comparable to the applications listed in the above 以及与上述相类似或可靠性要求更高的设备

10. 注意事项 Cautions for Use

10.1 如果产品所承受的机械应力超过规定的值, 元件可能被破坏.

The component may be damaged if mechanical stress over this specification is applied.

10.2 请注意保护工作电路不会因失误, 跌落和温度变化而产生浪涌电压.

Please pay attention to protect operating circuit from surge voltage provided by something of force such as falling, shock and temperature changing.

10.3 请注意永远不要给压电声响器施加直流电压.

Please pay attention never to be applied DC voltage to piezo sounder.

10.4 该声响器不适合洗涤, 因为它不密封.

Washing of the component is not acceptable. Because it is not sealed.

10.5 在使用烙铁的情况下, 应注意烙铁头的温度应该保持在 +350℃ 以下, 并且焊接时间控制在 3 秒内.

In case of using solder iron for soldering, the top of soldering iron's temperature should be kept less than +350 °C. Moreover the soldering time should be also kept with in 3 seconds.

