
The KA2206B is a monolithic intergrated circuit consisting of a 2-channel power amplifier. It is suitable for stereo and bridge amplifier application of radio cassette tape recorder.

FEATURES

• High output power

Stereo : $P_0 = 2.3W(Typ)$ at $V_{CC} = 9V$, $R_L = 4\Omega$. Bridge: $P_O = 4.7W$ (Typ) at $V_{CC} = 9V$, $R_L = 8\Omega$ • Low switching distortion at high frequency.

- Small shock noise at the time of power on/off due to a built-in muting circuit
- Good ripple rejection due to a built-in ripple filter.
- Good channel separation.
- Soft tone at the time of output saturation.
- Closed loop voltage gain fixed 45dB (Bridge : 51dB) but availability with external resistor added.
- Minimum number of external parts required.
- Easy to design radiator fin.



ORDERING INFORMATION

Device	Package	Operating Temperature
KS2206B	12-DIPH-300	-20°C ~ +70°C
KS22069BN	16-DIP-300A	

BLOCK DIAGRAM

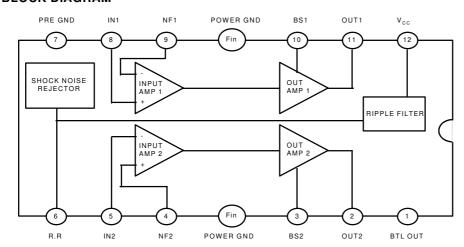


Fig. 1



ABSOLUTE MAXIMUM RATINGS

Characteristic	Symbol	Value	Unit	
Supply Voltage	V _{cc}	15	V	
Power Dissipation	P_{D}	4*	W	
Operating Temperature	T _{OPR}	-20 ~ +70	°C	
Storage Temperature	T _{STG}	-40 ~ +150	°C	

^{*} Fin is soldering on the PCB

ELECTRICAL CHARACTERISTICS


(Ta = 25 $^{\circ}\mathrm{C},~V_{\text{CC}}$ = 9V, f = 1KHz R_{G} = 600 $\Omega,$ unless otherwise specified)

Characteristic	Symbol	Т	Min	Тур	Max	Unit	
Operating Supply Voltage	V _{CC}				9	11	V
Quiescent Circuit Current	Iccq	V _I = 0, Stereo			40	55	mA
Closed Loop Voltage Gain	Gvc	Stereo	V _I = -45dBm	43	45	47	dB
		Bridge	1	49	51	53	dB
Channel Balance	СВ	Stereo		-1	0	+1	dB
		Stereo	$R_L=4\Omega$, THD = 10%,	1.7	2.3		W
Ouptut Power	Po		$R_L=8\Omega$, THD = 10%,		1.3		W
		Bridge	$R_L=8\Omega$, THD = 10%,		4.7		W
Total Harmonic Distortion	THD	Stereo	Po=250mW, $R_L = 4\Omega$		0.3	1.5	%
		Bridge	1		0.5		%
Input Resistance	Rı			21	30		ΚΩ
Ripple Rejection Ratio	RR	Stereo, $R_G=0\Omega$, $V_i=150mW$		40	46		dB
		f=100Hz					
Output Noise Voltage	V_{NO}	Stereo, $R_G=0\Omega$			0.3	1.0	mW
		Stereo,R _G =	10ΚΩ		0.5	2.0	mV
Cross Talk	СТ	Stereo, $R_G=10K\Omega$, $V_O=0dBm$		40	55		dB



APPLICATION INFORMATION

1.Stereo application




i) Fixed voltage gain (Pin 9 connected to GND directly)

$$G_V = 20 \log \quad (d\frac{R_1}{R_2})$$

ii) Variable voltage gain (Rf and C₁ connected with pin 9)

$$G_V = 20 \log \frac{R_1}{R_2 + R_F}$$

2. Bridge application

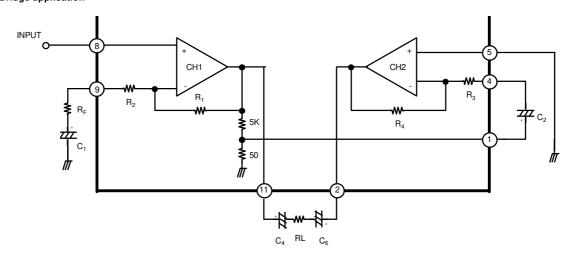

i) Fixed voltage gain (Pin 9 connected to GND directly)

$$G_V = 20 log + \frac{R_1}{R_2}B)$$

ii) Variable voltage gain $R_{\!F}$ and C_1 connected with pin 9)

$$G_V = 20 log \frac{R_1}{R_2 + R_F}$$



APPLICATION CIRCUIT

1. Stereo Amplifier

2. Bridge Amplifier


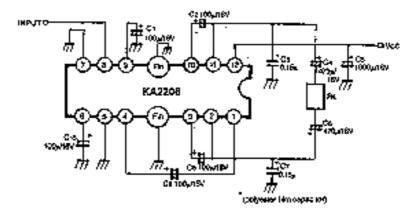



Fig. 3



12-DIPH-300

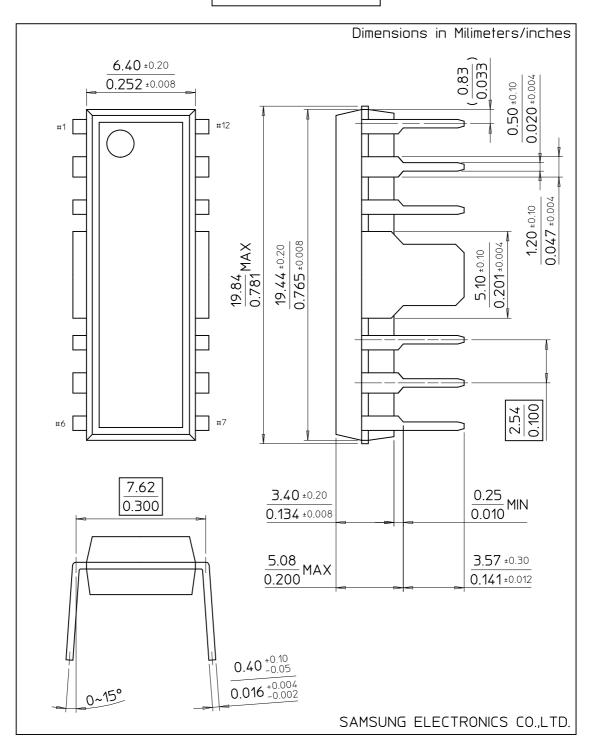

16-DIP-300A

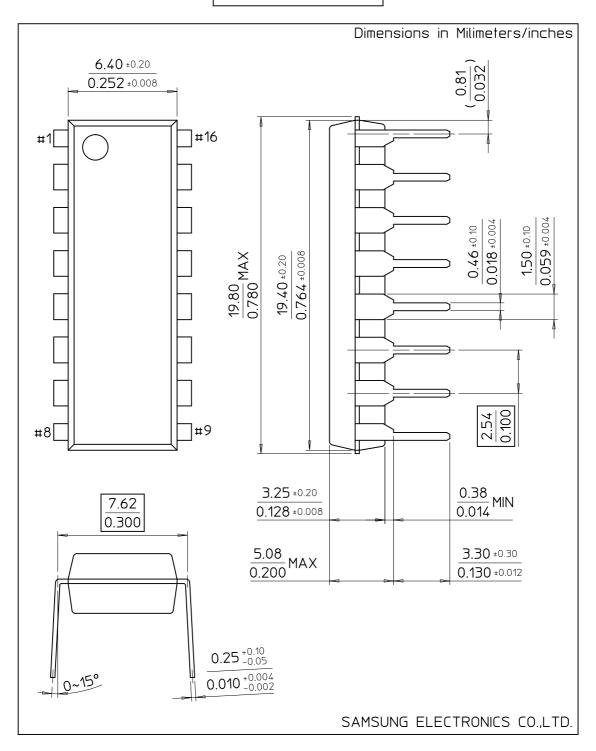

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.