34 W × 4-Channel BTL Power IC

HITACHI

ADE-207-263A (Z)

2nd Edition Jul. 1999

Description

The HA13158A is four-channel BTL amplifier IC designed for car audio, featuring high output and low distortion, and applicable to digital audio equipment. It provides 34 W output per channel, with a 13.7 V power supply and at Max distortion.

Functions


- 4 ch BTL power amplifiers
- Built-in standby circuit
- Built-in muting circuit
- Built-in protection circuit (surge, T.S.D and ASO)

Features

- Low power dissipation
- Soft thermal limiter
- Requires few external parts (C:3, R:1)
- Popping noise minimized
- Low output noise
- Built-in high reliability protection circuit
- Pin to pin with HA13153A/HA13154A/HA13155/HA13157/HA13158



Block Diagram

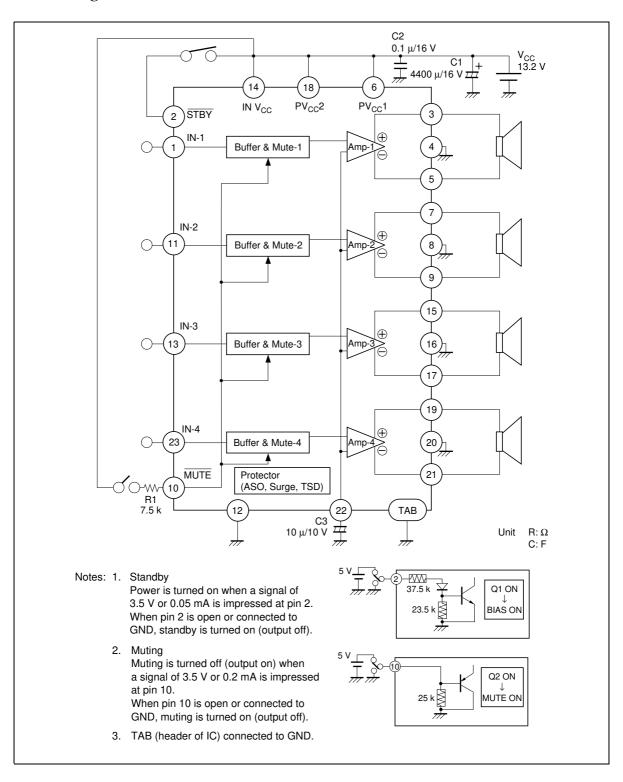


Absolute Maximum Ratings

Item	Symbol	Rating	Unit	
Operating supply voltage	V _{cc}	18	V	
Supply voltage when no signal*1	V _{cc} (DC)	26	V	
Peak supply voltage*2	V _{cc} (PEAK)	50	V	
Output current*3	I₀ (PEAK)	4	Α	
Power dissipation*4	P _T	83	W	
Junction temperature	Tj	150	°C	
Operating temperature	Topr	-30 to +85	°C	
Storage temperature	Tstg	-55 to +125	°C	

Note: 1. Tolerance within 30 seconds.

- 2. Tolerance in surge pulse waveform.
- 3. Value per 1 channel.
- 4. Value when attached on the infinite heat sink plate at Ta = 25 °C. The derating carve is as shown in the graph below.

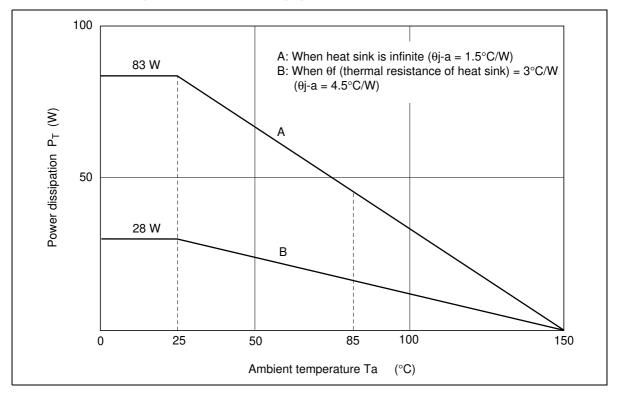

Electrical Characteristics (V $_{\rm CC}$ = 13.2 V, f = 1 kHz, R $_{\!\scriptscriptstyle L}$ = 4 $\Omega,$ Rg = 600 $\Omega,$ Ta = 25°C)

Item	Symbol	Min	Тур	Max	Unit	Test Conditions
Quiescent current	I _{Q1}	_	220	_	mA	Vin = 0
Output offset voltage	$\Delta V_{_{\mathrm{Q}}}$	-180	0	+180	mV	
Gain	G _v	30.5	32	33.5	dB	
Gain difference between channels	ΔG_{v}	-1.0	0	+1.0	dB	
Rated output power	P _o	_	20	_	W	$V_{cc} = 13.2 \text{ V},$ THD = 10%, $R_L = 4 \Omega$
Max output power	P _{OMAX}	_	34	_	W	$V_{\rm CC}$ = 13.7 V, $R_{\rm L}$ = 4 Ω
Total harmonic distortion	T.H.D.	_	0.03	_	%	Po = 3 W
Output noise voltage	WBN	_	0.15	_	mVrms	Rg = 0 Ω , BW = 20 to 20 kHz
Ripple rejection	SVR	_	55	_	dB	f = 120 Hz
Channel cross talk	C.T.	_	70	_	dB	Vout = 0 dBm
Input impedance	Rin	_	25		kΩ	
Standby current	I _{Q2}	_		10	μΑ	
Standby control voltage (high)	V _{STH}	3.5	_	V _{cc}	V	
Standby control voltage (low)	V _{STL}	0	_	1.5	V	
Muting control voltage (high)	V_{MH}	3.5	_	V _{cc}	V	
Muting control voltage (low)	V _{ML}	0	_	1.5	V	
Muting attenuation	ATTM		70		dB	Vout = 0 dBm

Pin Explanation

Pin No.	Symbol	Functions	Input Impedance	DC Voltage	Equivalence Circuit
1	IN1	CH1 INPUT	25 kΩ (Typ)	0 V	1
11	IN2	CH2 INPUT	_		
13	IN3	CH3 INPUT	_		
23	IN4	CH4 INPUT	_		
2	STBY	Standby control	90 kΩ (at Trs. cutoff)	_	23.5 k 23.5 k
3	OUT1 (+)	CH1 OUTPUT	_	V _{cc} /2	3
5	OUT1 (-)	_			
7	OUT2 (+)	CH2 OUTPUT	_		
9	OUT2 (-)	_			
15	OUT3 (+)	CH3 OUTPUT	_		
17	OUT3 (–)	-			
19	OUT4 (+)	CH4 OUTPUT	_		
21	OUT4 (–)	_			
10	MUTE	Muting control	25 kΩ (Typ)	_	10 → × × × × × × × × × × × × × × × × × ×
22	RIPPLE	Bias stability	_	V _{cc} /2	22 \ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \

Pin Explanation (cont)

Pin No.	Symbol	Functions	Input Impedance	DC Voltage	Equivalence Circuit
6	PV _{cc} 1	Power of output stage	_	V _{cc}	_
18	PV _{cc} 2				
14	INV _{cc}	Power of input stage	_	V _{cc}	_
4	CH1 GND	CH1 power GND	_	_	_
8	CH2 GND	CH2 power GND	_		
16	CH3 GND	CH3 power GND	_		
20	CH4 GND	CH4 power GND	_		
12	IN GND	Input signal GND	_	_	_

Point of Application Board Design

- 1. Notes on Application Board's Pattern Design
- For increasing stability, the connected line of V_{cc} and OUTGND is better to be made wider and lower impedance.
- For increasing stability, it is better to place the capacitor between $V_{\rm cc}$ and GND (0.1 μF) close to IC.
- It is better to place the grounding of resistor (Rg), between input line and ground, close to INGND (Pin 12) because if OUTGND is connected to the line between Rg and INGND, THD will become worse due to current from OUTGND.

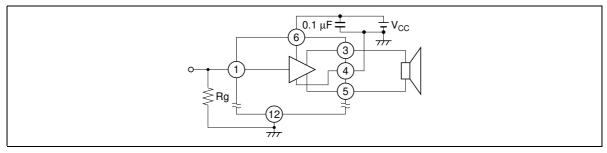


Figure 1 Notes on Application Board's Pattern Design

2. How to Reduce the Popping Noise by Muting Circuit

At normal operating circuit, Muting circuit operates at high speed under 1 µs.

In case popping noise becomes a problem, it is possible to reduce the popping noise by connecting capacitor, which determines the switching time constant, between pin 10 and GND. (Following figure 2)

We recommend value of capacitor greater then 1 µF.

Also transitional popping noise can be reduced sharply by muting before V_{CC} and Standby are ON/OFF.






Figure 2 How to use Muting Circuit


Table 1 Muting ON/OFF Time


C (μF)	ON Time	OFF Time
nothing	under 1 μs	under 1 μs
0.47	2 ms	2 ms
4.7	19 ms	19 ms


Characteristic Curves

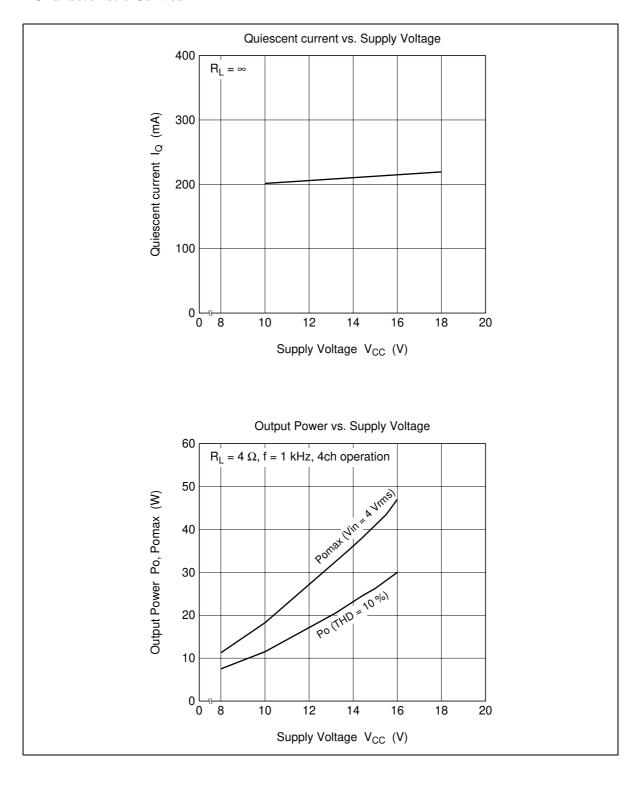


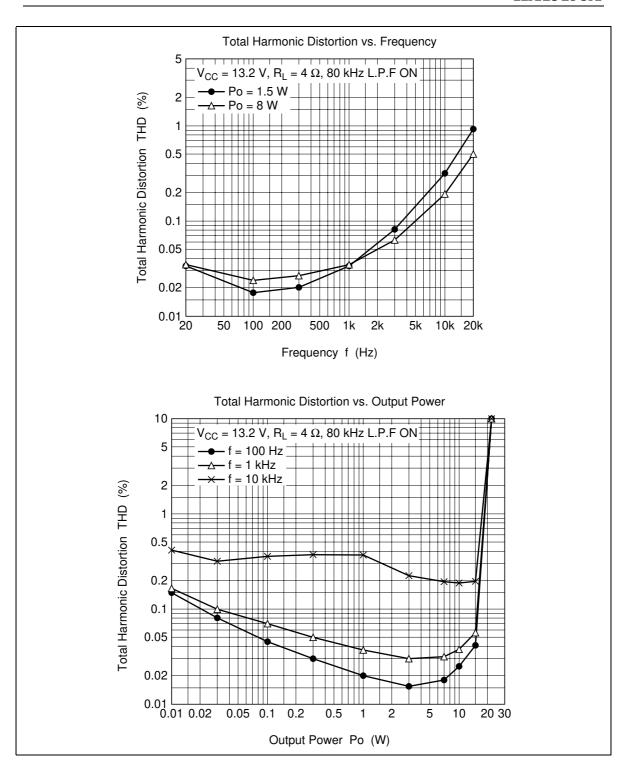

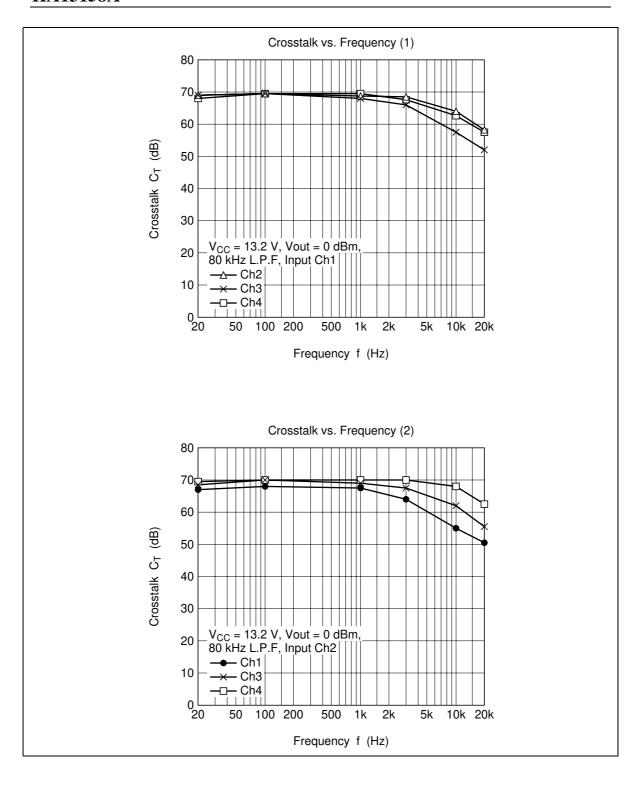


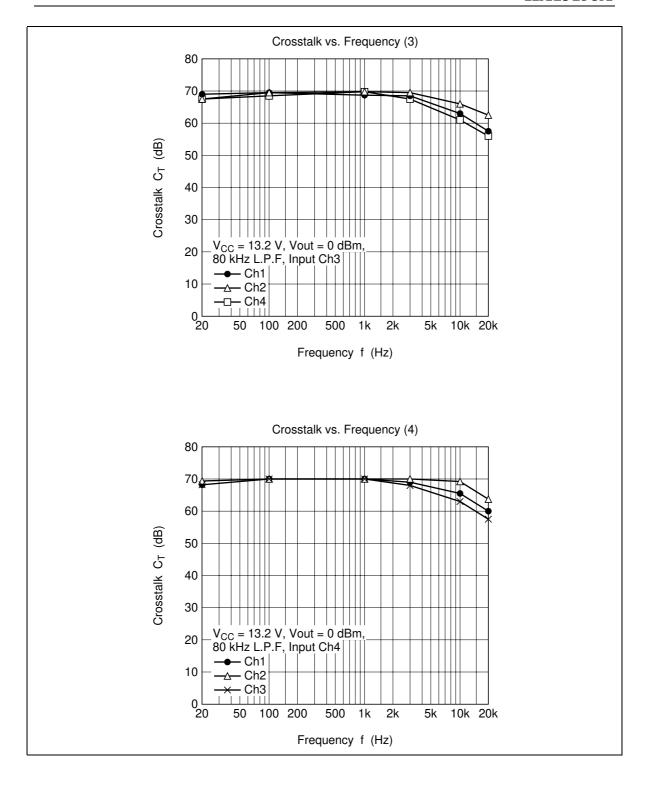

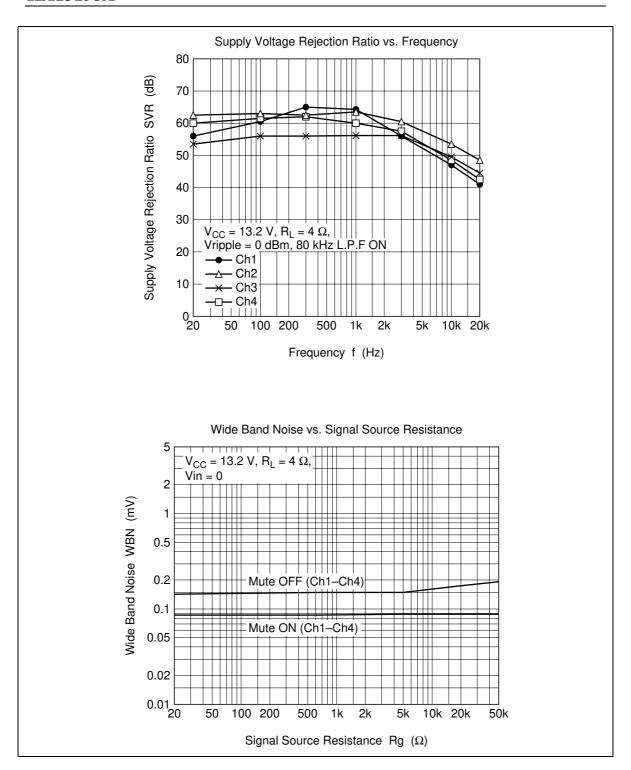

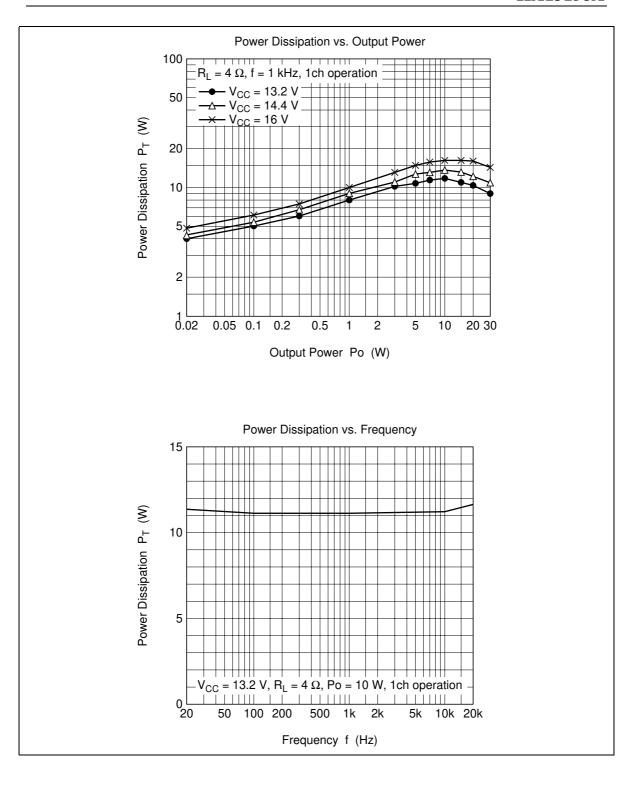

Package Dimensions

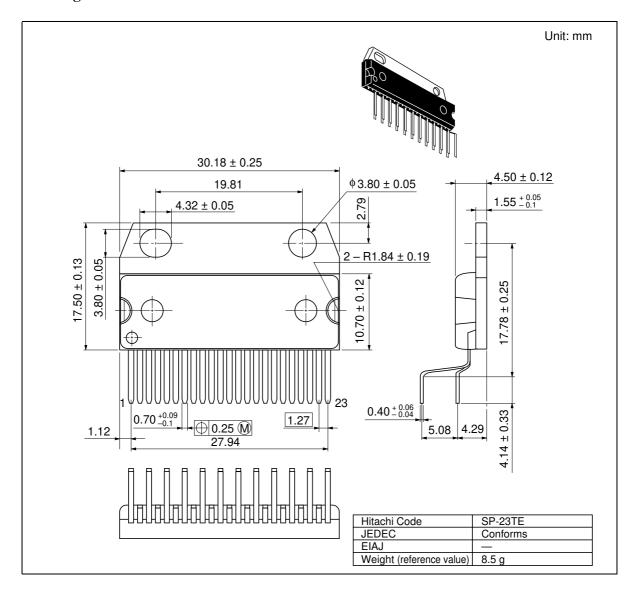

Disclaimer

- 1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
- 2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
- 3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
- 4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
- 5. This product is not designed to be radiation resistant.
- 6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
- Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

Sales Offices

HITACHI

Hitachi, Ltd.

Semiconductor & Integrated Circuits. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

URL NorthAmerica : http://semiconductor.hitachi.com/
Europe : http://www.hitachi-eu.com/hel/ecg
Asia : http://sicapac.hitachi-asia.com
Japan : http://www.hitachi.co.jp/Sicd/indx.htm

For further information write to:

Hitachi Semiconductor (America) Inc. 179 East Tasman Drive, San Jose,CA 95134 Tel: <1> (408) 433-1990 Fax: <1>(408) 433-0223 Hitachi Europe GmbH Electronic Components Group Dornacher Straße 3 D-85622 Feldkirchen, Munich Germany Tel: <49> (89) 9 9180-0

Fax: <49> (89) 9 29 30 00 Hitachi Europe Ltd. Electronic Components Group. Whitebrook Park Lower Cookham Road

Maidenhead Berkshire SL6 8YA, United Kingdom Tel: <44> (1628) 585000 Fax: <44> (1628) 585160 Hitachi Asia Ltd. Hitachi Tower 16 Collyer Quay #20-00, Singapore 049318 Tel : <65>-538-6533/538-8577 Fax : <65>-538-6933/538-3877 URL : http://www.hitachi.com.sg

Hitachi Asia Ltd. (Taipei Branch Office) 4/F, No. 167, Tun Hwa North Road, Hung-Kuo Building,

Taipei (105), Taiwan Tel : <886>-(2)-2718-3666 Fax : <886>-(2)-2718-8180 Telex : 23222 HAS-TP URL : http://www.hitachi.com.tw Hong Kong Tel: <852>-(2)-735-9218 Fax: <852>-(2)-730-0281 URL: http://www.hitachi.com.hk

Hitachi Asia (Hong Kong) Ltd.

7/F., North Tower,

World Finance Centre

Harbour City, Canton Road Tsim Sha Tsui, Kowloon,

Group III (Electronic Components)

Copyright © Hitachi, Ltd., 2000. All rights reserved. Printed in Japan. Colophon 2.0

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.