

SPECIFICATION

Customer :

Applied To :

Product Name : SPEAKER

Model Name : KP2415DM01

Drawing No. : KF3.001.320

Signature of Appronal

--

Signature of KEPO

Approved by	Checkde by	Issued by	Date



Ningbo Kepo Electronics Co.,Ltd.

Address: No.25 Baoyuan Road Dongqian Lake Industrial Area, Dongqian Lake Ningbo 315121, China

Tel: +86(574)88371186, 88370330 Fax: +86(574)88370329

<http://www.chinaacoustic.com> E-mail: Sales@kepo.com.cn

Specification for Speaker		Page	2/9
Model No. : KP2415DM01		Revision No.	1.0
		Drawing No.	KF3.001.320
<h2>CONTENTS</h2> <ol style="list-style-type: none"> 1. Scope 2. General 3. Electrical and Acoustic Characteristics. 4. Reliability Test 5. Measurement Block Diagram & Response curve 6. Structure 7. Dimensions 8. Packing 9. Revision 			

Specification for Speaker		Page	3/9
Model No. : KP2415DM01		Revision No.	1.0
		Drawing No.	KF3.001.320

1. Scope

This specification is applied to the dynamic speaker which is used all of the electrical acoustic product.

-- compact, rich sound

-- applications: mobile phone, PDA, notebook computer, etc. ..

2. General

2.1 Out-Diameter : 24x15 mm

2.2 Height : 5.2 mm

2.3 Weight : 4 g

2.4 Operating Temperature range:

-20~+70℃ without loss of function


2.5 Store Temperature range:

-40~+85℃ without loss of function


3. Electrical and Acoustic Characteristics.

Test condition : 15 ~ 35 ℃, 25% ~ 85% RH, 860~1060 mbar


No	Items	Specification
1	Impedance	8 Ω ± 15% (1Vrms at 1KHz)
2	Sound Pressure Level	85 dB ± 3dB (0.1W/0.1M at 0.5K、0.8K、1.0K、1.5K、2K)
3	Resonance Frequency	900 Hz ± 20%
4	Vibration Frequency	200 Hz ± 20%
5	Frequency Range	Fo ~20KHz
6	Input Power	Rated 0.8 W / Max. 1 W
7	Distortion	< 5 % Max. at 2kHz/2Vrms
8	Buss and Rattle	Should not be audible buzzes,rattles when the 2.53V sine wave signal swept at frequency range.
9	Polarity	When supplied plus D.C. voltage to (+) terminal, the cone diaphragm must move to forward.

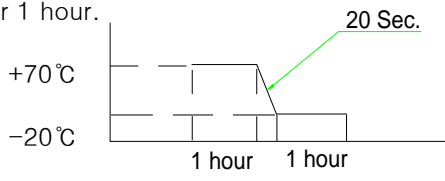Specification for Speaker		Page	4/9
Model No. : KP2415DM01		Revision No.	1.0
		Drawing No.	KF3.001.320
<h2>4. Reliability Test</h2> <p>After test(1~7item), the speaker S.P.L . difference shall be within $\pm 3\text{dB}$, and the appearance not exist any change to be harmful to normal operation (e.g. cracks,rusts,damages and especially distortion).</p>			
No	Items	Specification	
1	High Temperature Test	After being placed in a chamber with $+85\pm 3\text{ }^{\circ}\text{C}$ for 96 hours and then being placed in natural condition for 1 hour, speaker shall be measured.	
2	Low Temperature Test	After being placed in a chamber with $-40\pm 3\text{ }^{\circ}\text{C}$ for 96 hours and then being placed in natural condition for 1 hour, speaker shall be measured.	
3	Humidity Test	After being placed in a chamber with 85 to 90%R.H. at $+40\pm 2\text{ }^{\circ}\text{C}$ for 96 hours and then being placed in natural condition for 1 hour, speaker shall be measured.	
4	Thermal Shock Test	<p>After being placed in a chamber at $+70^{\circ}\text{C}$ for 1 hour, then speaker shall be placed in a chamber at -20°C for 1 hour(1 cycle is the below diagram).</p> <p>After 6 above cycles, speaker shall be measured after being placed in natural condition for 1 hour.</p>  <p>The diagram shows a temperature profile over time. It starts at $+70^{\circ}\text{C}$ for 1 hour, then drops to -20°C for 1 hour. A green line indicates a 20-second ramp time between the two temperature levels.</p>	
5	Vibration Test	After being applied vibration of amplitude of 1.5mm with 10 to 55Hz band of vibration frequency to each of 3 perpendicular directions for 1 hour, then placed in natural condition for 1 hour, speaker shall be measured.	
6	Drop Test	The speaker when mounted in the jig which weight 85g~100g, shall with stand 15 times random drops from a height of 1.5 meter to a concrete floor faced with 5mm thick hard wood board.and be nothing mechanical damage.	
7	Load test	After being applied loading white noise with input power 0.8W(2.53Vrms.) for 96 hours, then placed in natural condition for 1 hour, speaker shall be measured.	
8	Insulation test	When they are measured with DC 100V the insulation resistance between v.c. terminal and frame must be more than 1 M Ω	

5. Measurement Block Diagram & Response curve

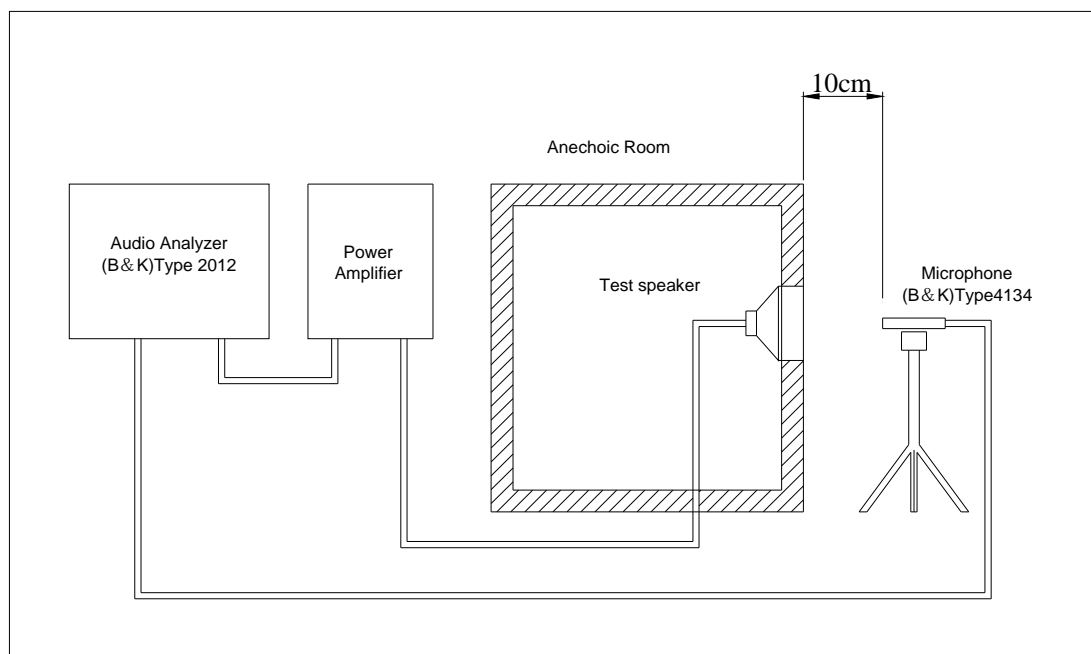


[dB/20.0u Pa]

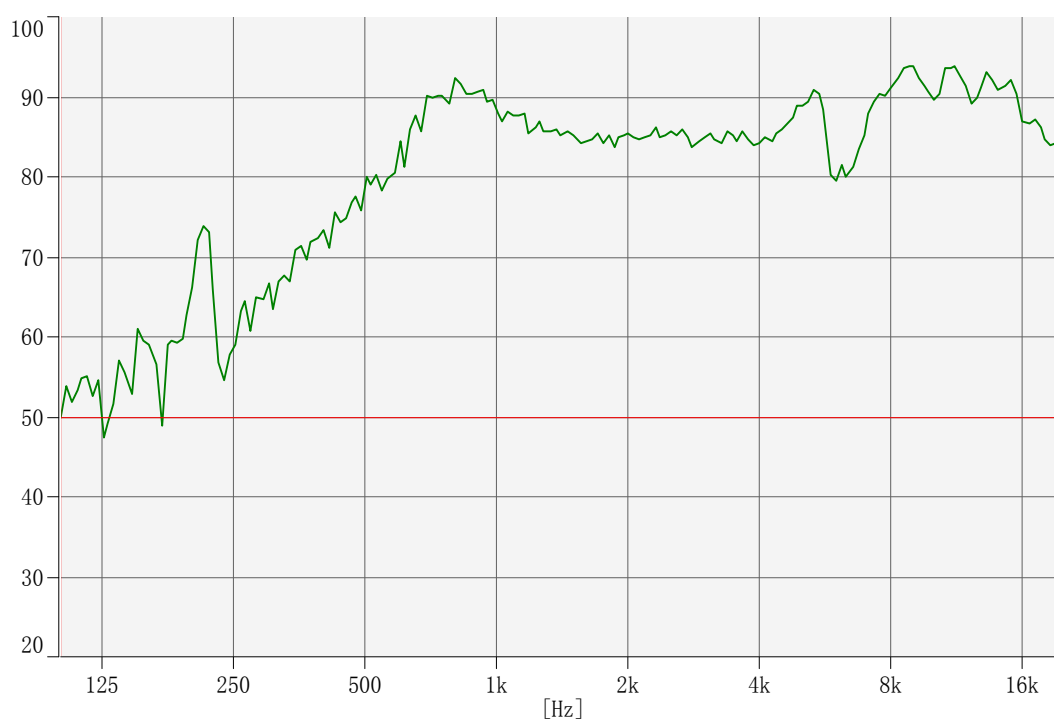

Specification for Speaker		Page	6/9
Model No. : KP2415DM01		Revision No.	1.0
		Drawing No.	KF3.001.320

6. Structure

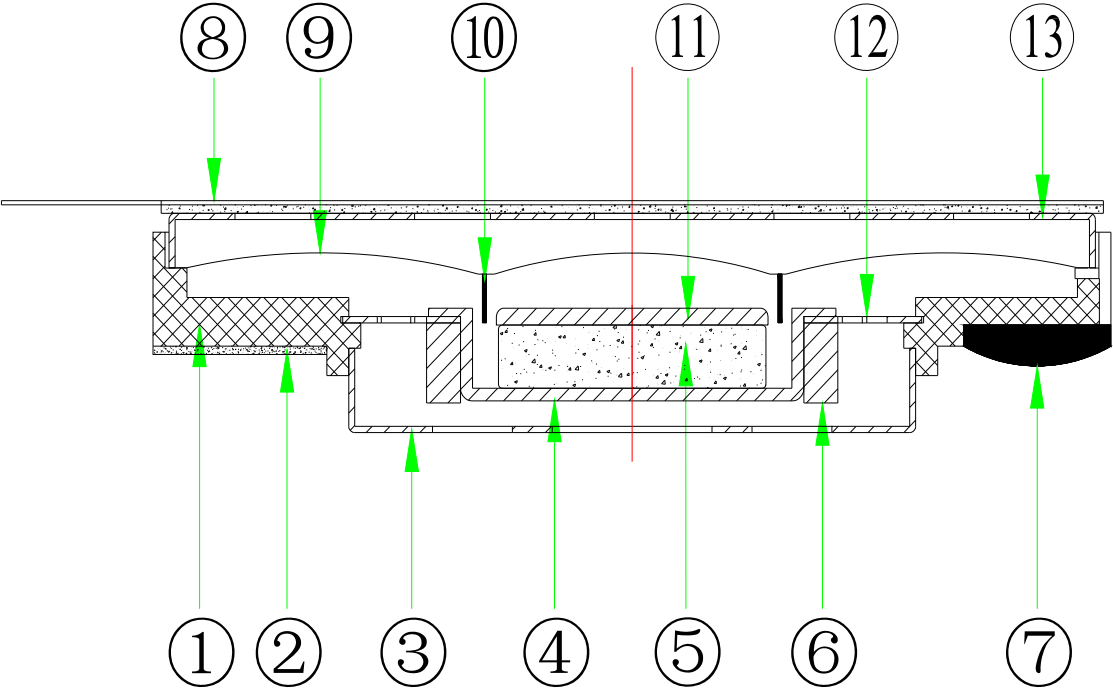

13	Front Cap	1	SUS304	
12	Damper	1	SUS304	
11	Plate2	1	SPC	
10	Voice Coil	1	Copper	
9	Diaphragm	1	PEN	
8	Gasket	1	2B	
7	Terminal	1	Epoxy PCB	
6	Plate1	1	SPC	
5	Magnet	1	Nd-Fe-B	
4	Yoke	1	SPC	
3	Back Cap	1	SUS304	
2	Screen	1	3B	
1	Frame	1	PBT	
No.	Part Name	Q'ty	Material	Remarks

Specification for Speaker

Page

7/9

Revision No.


1.0

Model No. : KP2415DM01


Drawing No.

KF3.001.320

7. Dimensions

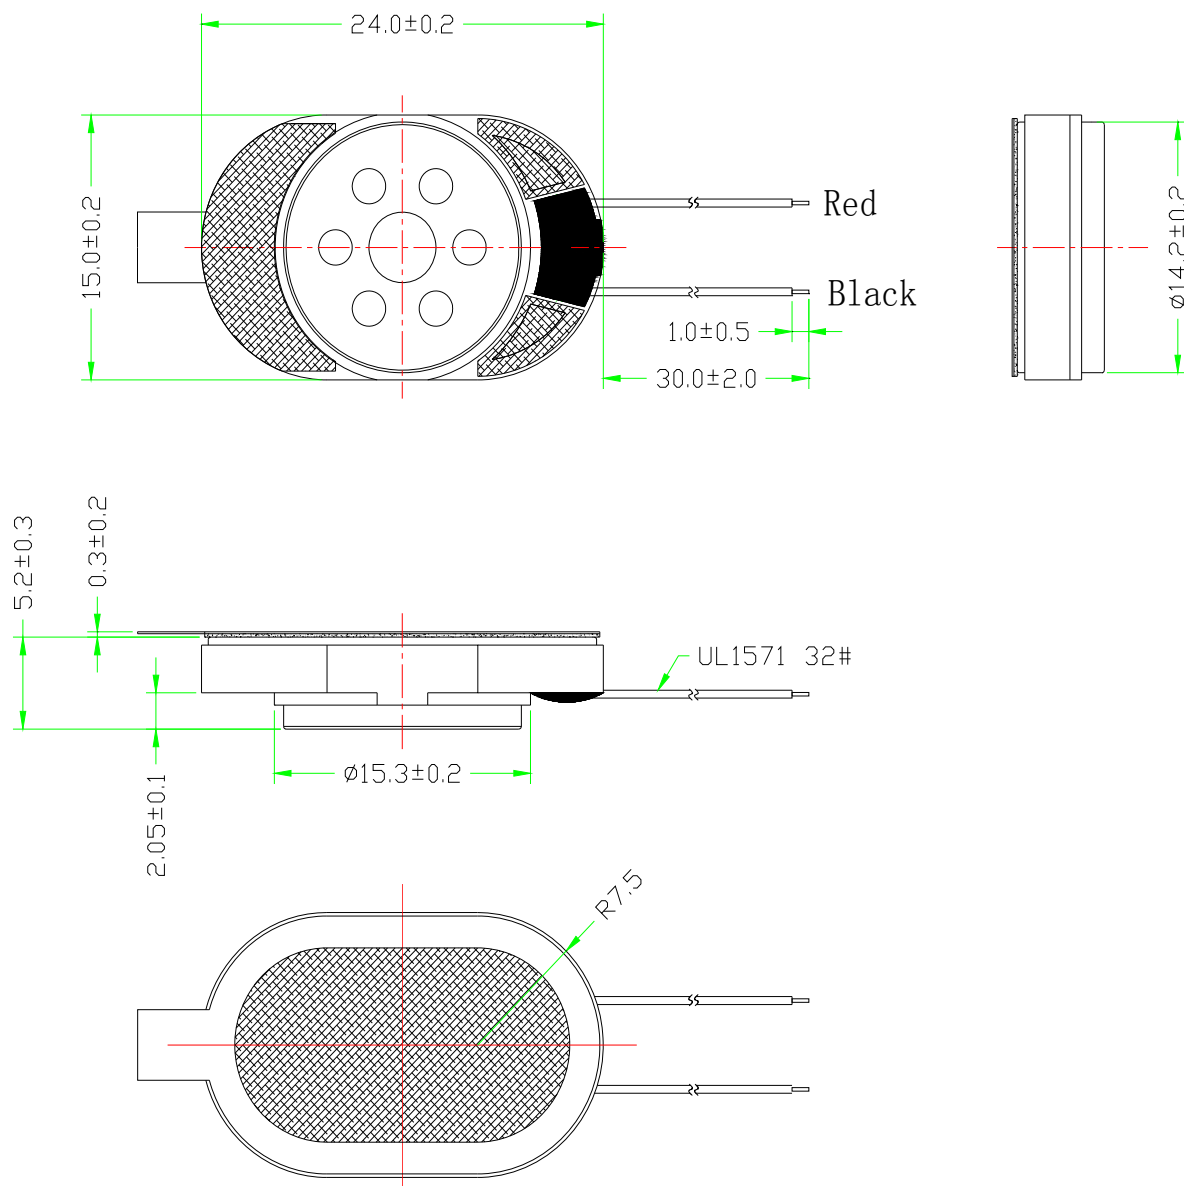

FIRST ANGLE PROJECTION



UNIT : mm

Tolerance : ± 0.2

Specification for Speaker

Page

8/9

Model No. : KP2415DM01


Revision No.

1.0




Drawing No.

KF3.001.320

8. Packing

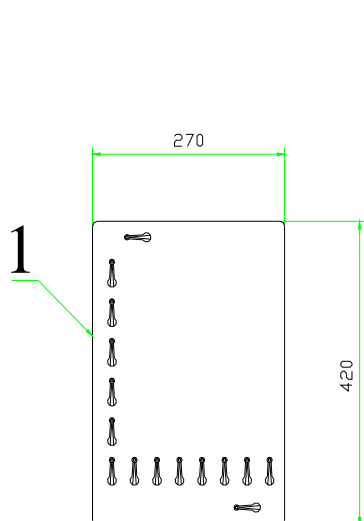

100Pcs

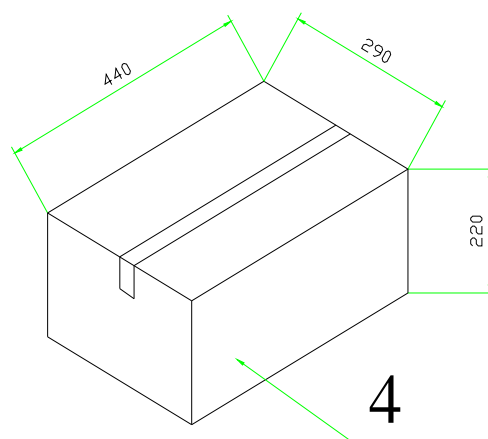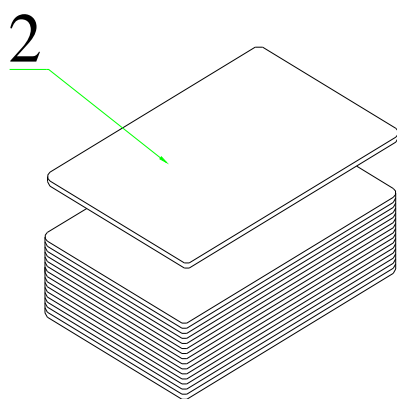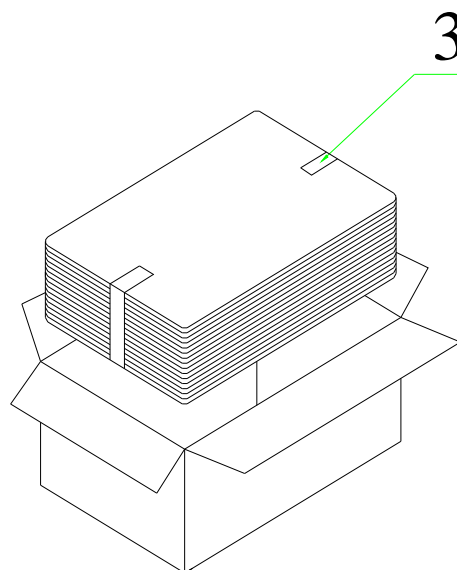

QTY: 2000Pcs

440 x290 x220

[illegible]