
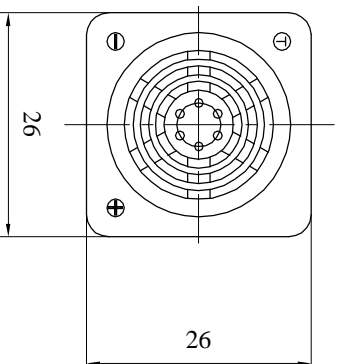
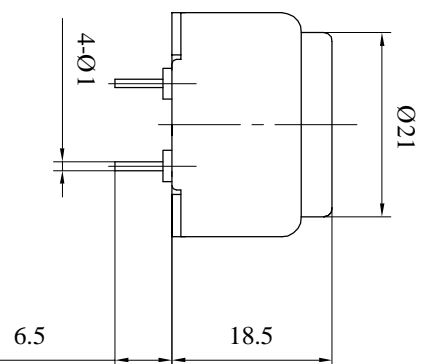
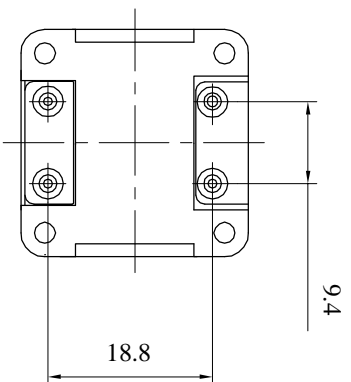


# Specifications

1. Rated Voltage ( $V_R$ ).....6VDC.
  2. Operating Voltage.....4~8VDC.
  3. Trigger Voltage ( $V_t$ ) .....≥4VDC.
  4. Resonant Frequency .....400±100Hz
  - ※5. Rated current.....≤30mA.
  - ★6. Response Time.....≤400ms
  - ※7. Min Sound Output at 20cm.....80dB
  - ※8. Trigger Current.....≤1mA
  9. Case Material.....ABS
  10. Operating Temperature.....-20°C~+60°C
  11. Storage Temperature.....-30°C~+70°C
  12. Weight.....10g
- ※ Valve applying rated voltage ( $V_R=V_i$ ).
- ★ Valve applying min operating voltage ( $V_R=V_i$ ).

## ■ COUPLED CIRCUIT

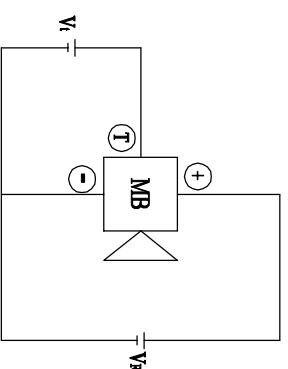

No.		DESCRIPTION		APPROVED	DATE	<b>KEPO</b> NINGBO KEPO ELECTRONIC CO.,LTD <a href="http://www.chinacoustic.com">http://www.chinacoustic.com</a>	
DESIGNER/ENGINEER		DRAWN		APPROVALS		<b>Magnetic Buzzer</b> <b>KPMB-2606P4</b>	
NOTED/OTHERWISE		CHECKED		DATE		UNIT: mm DWGNO: KP3.841.601	
XX		XX		05.03.17		SCALE: VER: 1.0	
XXX		XXX		APPROVED		SHEET	
99% ANTI-STATIC		FIRST ANGLE PROJECTION					