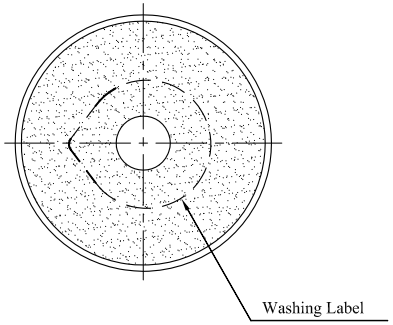

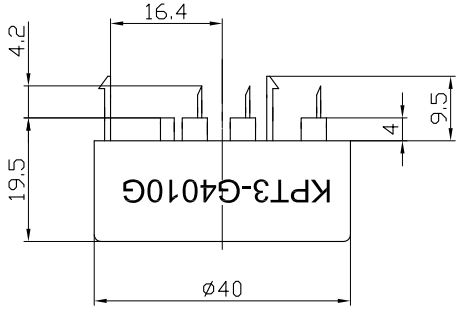

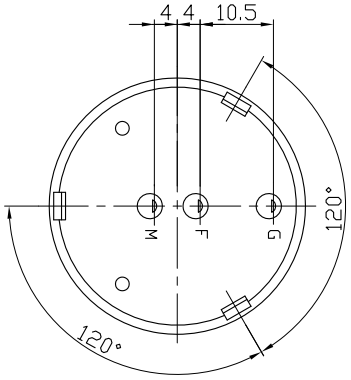

SPECIFICATION

1.Rated Voltage 9VDC
2.Operating Voltage .....6~15VDC
3.Max.Rated Current 16mA
4.Min.Sound Pressure Level 90dB/30cm
5.Tone Nature.....Continuous
6.Resonant Frepuency .....3.4±0.5KHz
7.Shell Material/Color .....PA/Black
8.Operating Temperature .....-20~+80 ℃
9.Store Temperature .....-30~+100 ℃
10.Weight.....13g

Compliance with ROHS

No.	DESCRIPTION	APPROVED	DATE
		APPROVALS	DATE
		DRAWN	
		CHECKED 水成锋	
		APPROVED 梁树棠	10.10.08

TOLERANCES UNLESS NOTED OTHERWISE
.X ±
.XX ±
.XXX ±
90° FORMED +2° ANGLES -1°
FIRST ANGLE PROJECTION

KEPO NINGBO KEPO ELECTRONIC CO.,LTD
http://www.chinaacoustic.com

Piezo Buzzer Quartz-1
KPT3-G4010G-2460

UNIT	DWG NO.	
mm	OEM2460R	
SCALE NOT TO SCALE	SHEET	VER 1.0