

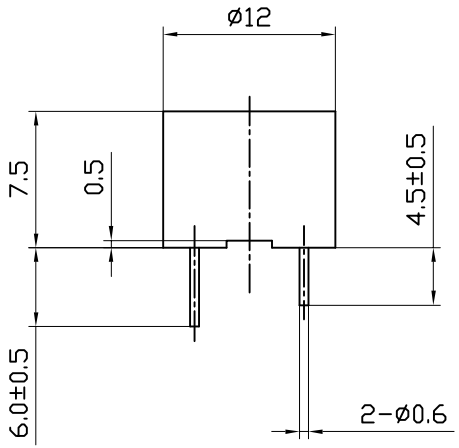





SPECIFICATION

1.Rated Voltage 3VDC
2.Operating Voltage ..... 2~5VDC
3.Max.Rated Current 30mA/3VDC
4.Min.Sound Pressure Level 85dB/10cm
5.Resonant Frequency ..... 2300±500Hz
6.Response Time 50ms
7.Case Material ..... PBT
8.Operating Temperature ..... -30～+80℃
9.Store Temperature ..... -30～+80℃
10.Weight 2g

No.	DESCRIPTION	APPROVED	DATE

TOLERANCES UNLESS NOTED OTHERWISE
.X ±
.XX ±
.XXX ±
90° FORMED +2.° ANGLES -1.°
FIRST ANGLE PROJECTION

APPROVALS | DATE
DRAWN
CHECKED
APPROVED | 05.03.03

KEPO NINGBO KEPO ELECTRONIC CO.,LTD
http://www.chinaacoustic.com

Magnetic Buzzer
KPX-1203UB

UNIT mm | DWG NO. KP3.840.693
SCALE NOT TO SCALE | SHEET | VER 1.3