


SPECIFICATION

- 1. Rated Voltage 5 VDC
- 2. Operating Voltage 4~8 VDC
- 3. Max. Rated Current 30mA/5VDC
- 4. Min. Sound Pressure Level 85dB/10cm
- 5. Resonant Frequency 2300±300HZ
- 6. Response Time 50ms
- 6. Case Material PBT
- 7. Operating Temperature -20~+70℃
- 8. Store Temperature -30~+80℃
- 9. Weight 2g

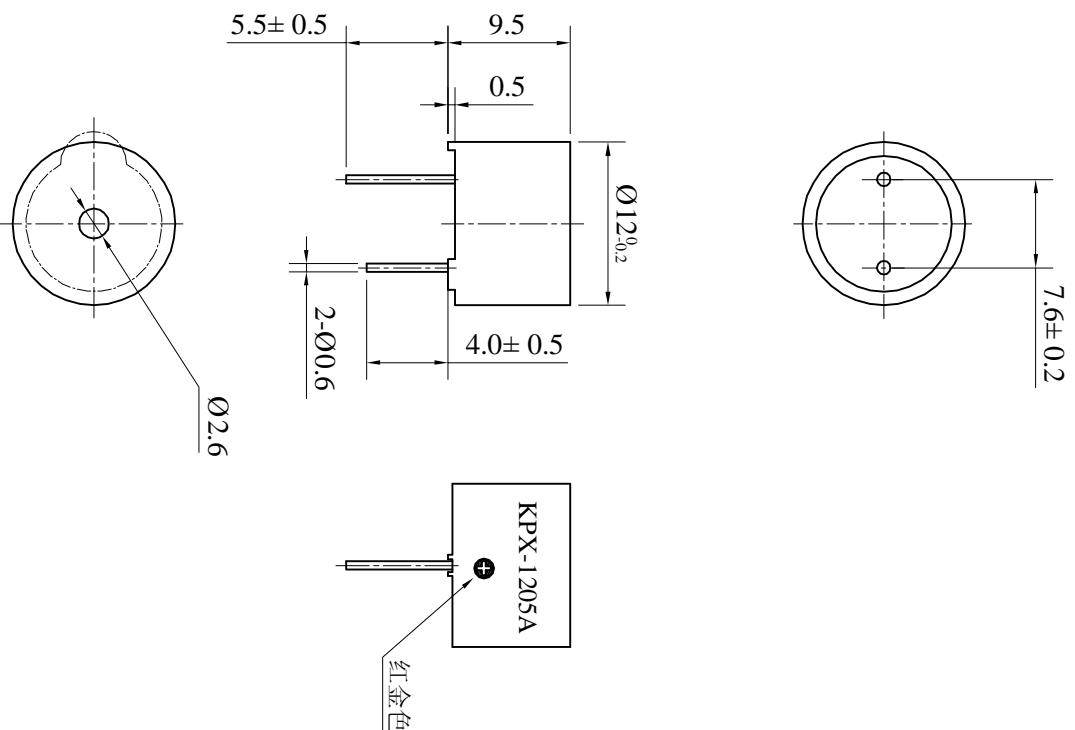

KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
Magnetic Buzzer KPX-1205A	
No. _____	DATE _____
DESCRIPTION _____	DATE _____
DRAWN _____	DATE _____
CHECKED _____	DATE _____
APPROVED _____	DATE _____
UNIT: mm	SCALE: NOT TO SCALE
DRAWING NO: KP3,8,40,688	SHEET: 1.1
DATE: 04.12.31	SCALE: NOT TO SCALE