


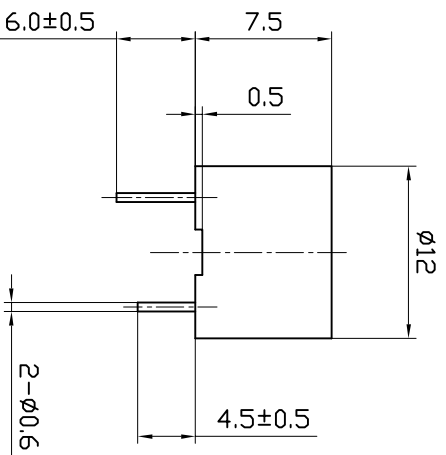


# SPECIFICATION

- 1. Rated Voltage ..... 12VDC
- 2. Operating Voltage ..... 8~15VDC
- 3. Max Rated Current ..... 30mA/12VDC
- 4. Min. Sound Pressure Level ..... 85dB/10cm
- 5. Resonant Frequency ..... 2300±500Hz
- 6. Response Time ..... 50ms
- 7. Case Material ..... PBT
- 8. Operating Temperature ..... -20~+70°C
- 9. Store Temperature ..... -30~+80°C
- 10. Weight ..... 2g



<b>KEPO</b> NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com		<b>Magnetic Buzzer</b> <b>KPX-1212UB</b>		UNIT: mm SCALE: NOT TO SCALE	SHEET: KP3,8-40,695 VER: 1.2
No.	DESCRIPTION	APPROVED	DATE	DRAWN	CHECKED
<small>           1. 比例 1:1            2. 公差按 GB/T1804-M 执行            3. 未注公差按 GB/T1804-M 执行            4. 表面粗糙度按 GB/T10613 执行            5. 热处理按 GB/T16288 执行            6. 电镀按 GB/T13801 执行            7. 油漆按 GB/T1740 执行            8. 包装按 GB/T191 执行            9. 检验按 GB/T2828 执行            10. 材料按 GB/T19001 执行         </small>		APPROVALS		DATE	
		APPROVED		05.05.20	