


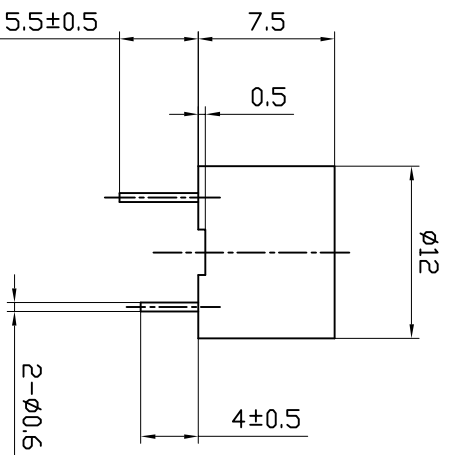


SPECIFICATION

- 1. Rated Voltage 1.5VDC
- 2. Operating Voltage 1~2VDC
- 3. Max Rated Current 30mA/1.5VDC
- 4. Min. Sound Pressure Level 75dB/10cm
- 5. Resonant Frequency 2300±500Hz
- 6. Response Time 50ms
- 7. Case Material PBT
- 8. Operating Temperature -20~+70°C
- 9. Store Temperature -30~+80°C
- 10. Weight 2g



Compliance with ROHS			
KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com			
Magnetic Buzzer PHP KPY-G1201UB-2235			
No.	DESCRIPTION	APPROVED	DATE
<small>NO. OF APPROVALS</small>			
<small>DATE OF APPROVALS</small>			
<small>DRAWN</small>		<small>CHECKED</small>	
<small>DATE</small>		<small>DATE</small>	
<small>APPROVED</small>		<small>APPROVED</small>	
<small>UNIT</small>		<small>SCALE</small>	
<small>mm</small>		<small>NOT TO SCALE</small>	
<small>OEM2235R</small>			<small>VER 1.0</small>