



Lead

FEATURES

- Compact and low profile.
- Low temperature coefficient for low dispersion and stable characteristics.
- Use in combination with IF band-pass filters to eliminate need for adjustment.

SHAPES AND DIMENSIONS

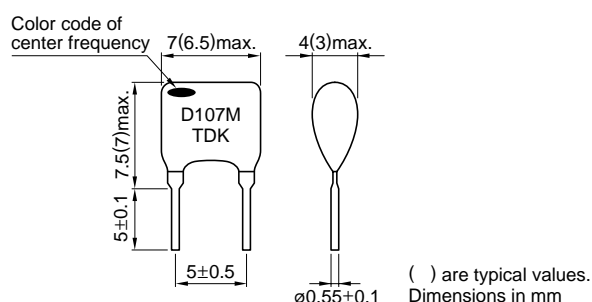


ELECTRICAL CHARACTERISTICS

Part No.	Center frequency F ₀	Color code of center frequency	Demodulation output V _{out} (mV)min.	Demodulation distortion ratio D _{fo} (%)max.	Applied IC name
FCD1070MA__U			80 (100)	0.8(0.4)	CX20029
FCD1070MA__URL			280 (395)	1.0(0.3)	LA1832
FCD1070MA__UK2L	10.64MHz±30kHz	Black	220 (300)	1.0(0.3)	LA1833
FCD1070MA__UK4L	10.67MHz±30kHz	Blue	1400(1600)	1.0(0.4)	LA1838
FCD1070MA__UK5L	10.70MHz±30kHz	Red	45 (50)	1.0(0.6)	LA1822
FCD1070MA__UDL	10.73MHz±30kHz	Orange	60 (80)	1.5(0.8)	TA8122
FCD1070MA__UEL	10.76MHz±30kHz	White	60 (80)	1.0(0.4)	TA8132
FCD1070MA__UYL			60 (85)	1.0(0.6)	TA2008
FCD1070MA__UY2L			55 (90)	1.0(0.7)	TA2111
FCD1070MA__UP2L			120 (175)	—	MC13156


- () show typical values.

TYPICAL MEASURING CIRCUIT


FCD1070MA UDL

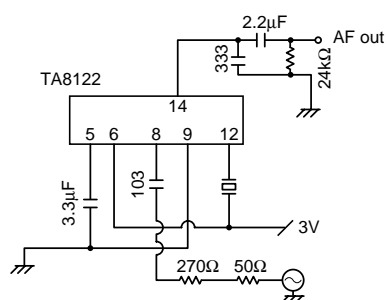

FCD1070M UYL



FCD1070MA U

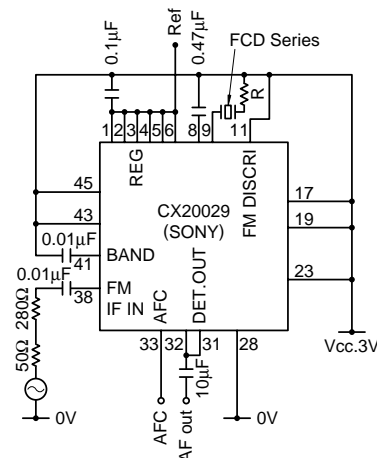

- Ceramic discriminators are classified by exclusive IC numbers. Please ask for TDK part number.


Piezoelectric Products

Ceramic Discriminators

Lead

FCD Series FCD1070MA Type

TAPING SPECIFICATIONS

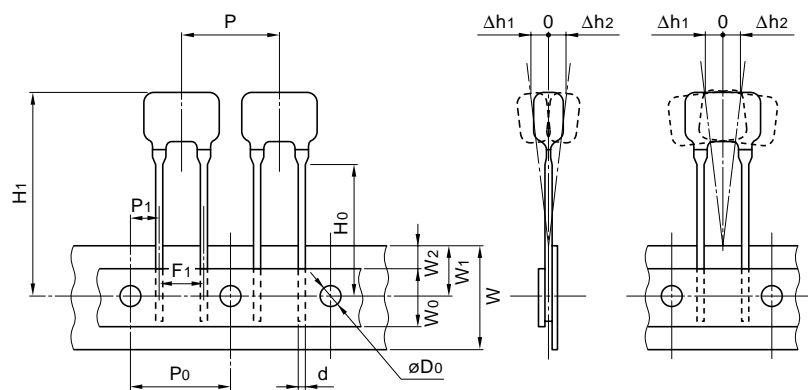

Dimensions in mm

Type	FCD1070
P	12.7±1
P ₀ *1	12.7±1
P ₁	6.35±1.3
F ₁ , F ₂ *2	5±0.3
W	18+1, -0.5
W ₀	11.5min.
W ₁	9±0.5
W ₂	5max.
H ₀ *3	16±0.5(18+1.5, -0)
ØD ₀	Ø4±0.2
Δh ₁ , Δh ₂ *4	2max.
d	0.55±0.1
H ₁	30max.

*1 The cumulative pitch tolerance is ±1mm at 20 pitches.

*2 The measurement position is the top of the tape and between the leads.

*3 The product with this dimension is also available.

*4 The measurement position is at a product of the top.