

规格书编号

SPEC NO :

产品规格书

SPECIFICATION

CUSTOMER 客 户 : _____

PRODUCT 产 品 : _____ CRYSTAL FILTER _____

MODEL NO 型 号 : _____ UM-5-45M15B _____

PREPARED 编 制 : _____ LEO _____ CHECKED 审 核 : _____ YORK _____

APPROVED 批 准 : _____ LIUMING _____ D A T E 日 期 : _____ 2011-7-22 _____

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司

Shoulder Electronics Limited

更改历史记录

History Record

[illegible]

SPECIFICATION SHEET

□ APPLICATION


This Standard Will Apply to The Quartz Crystals.

□ ELECTRICAL DATA

NO	Speciality	Parameter
01	Holder type	MCF UM-5*2
02	Mode of Oscillations	Fundamental
03	Center Frequency	45.000MHz
04	Pass bandwidth	±9KHz min (at 1dB) ±7.5KHz min (at 3dB)
05	Pass band ripple	1.0dB max
06	Insertion loss	2.0dB max
07	Stop Band width	±34KHz max (at 35dB)
08	Terminating impedance	0.68KΩ//2.0pf//8.0pf
09	Operating Tem. Range	-20~+70°C
10	Storage Temperature Range	-40~+85°C
11	Insulated Resistance	500MΩ(max)(DC100V)
12	Attenuation Guaranteed(1)	F0+600KHZ ~ +1000KHZ 70dBMin
	Attenuation Guaranteed(2)	F0+200KHZ ~ -1000KHZ 70dBMin
13	Aging per Year	±3ppm

SPECIFICATION SHEET

□ MECHANICAL DATA


1. Marking :	
2.Shock Test :	Dropping from 50 cm height,3 times on 30mm-thick- hard wood, After testing, the electrical data follows the requirement.
3.Vibration Test :	30 minutes in each direction 10 to 55 Hz, amplitude 0.75mm, After testing, the electrical data follows the requirement.
4.Terminal strength :	Tensile: Fix main body of crystal. Load 0.9kg pulling force along, teminal axial for 30±5 seconds. The terminal can not he pulled out or broken. Bending: Hang 450g object on lead terminal. Bend 90 degree for 2 to 3 seconds. Return to the former place with the same speed and then do it again oppositely. The down-lead does not become broken and loosed.
5.Sealing :	The crystal unit shall be immersed in alcohol for 5 minutes with 5kg pressure per cm2 .Taking out, Testing the resistance between down- lead and fundamental. The resistance shall be at least 500MΩ(max) (DC100V).
6.Temperature cycle :	2 ~ 3 min -20°C to +70°C 30min 30min After cycling three times, there is no distinct damage on the surface. Capacity testing requirement as vibration.

SPECIFICATION SHEET


□ MECHANICAL DATA

7.Solderability :	The lead(2to2.5mm from terminal to bottom) is immersed in a $230\pm5^{\circ}\text{C}$ Solder bath within 2 ± 0.5 seconds. The dipping surface of the lead shall be at least 95% covered with a Continuous new solder coating. Capacity testing requirement as vibration.
8. Resistance to soldering heat :	The(2 to 2.5mm from terminal to bottom) is immersed in a $350\pm10^{\circ}\text{C}$ solder bath within 3.5 ± 0.5 seconds. After testing, without distinct damage on the surface. Capacity testing requirement as vibration.
9. Resistance to heat :	Resistance to the lowest temperature: Stored at $-25\pm3^{\circ}\text{C}$ for 2 hours and then at normal temperature for 2 hours before testing. Capacity testing requirement as vibration. Resistance to the highest temperature: Stored at $70\pm2^{\circ}\text{C}$ for 2 hours and then at normal temperature for 2 hours before testing. Capacity testing requirement as vibration.
10. Invariable humidity :	Stored at $40\pm3^{\circ}\text{C}$ and $\text{RH}93\%\pm2\%$ for 48 hours and then at normal condition for 2 hours before testing. Without distinct damage to the surface. Capacity testing requirement as vibration.

Test Circuit

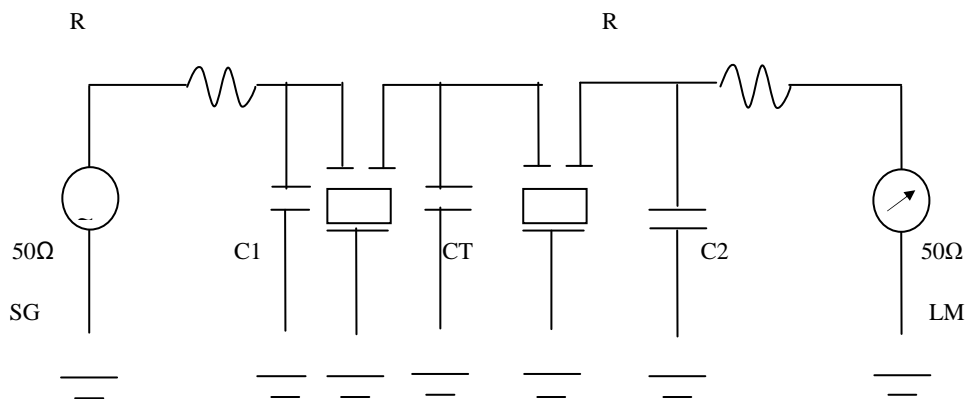

R : 630Ω, C1, C2 : 2.0pf , CT:8.0pf

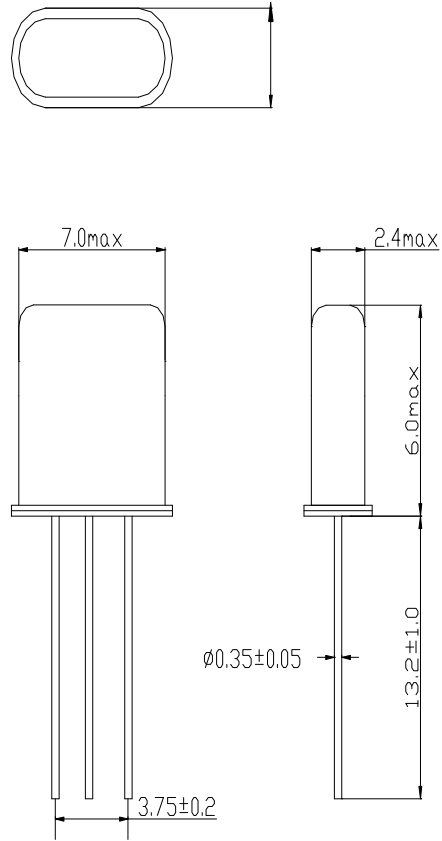

UM5