

规格书编号

SPEC NO :

# 产品规格书

# SPECIFICATION

CUSTOMER 客 户: \_\_\_\_\_

PRODUCT 产 品: \_\_\_\_\_ SAW FILTER \_\_\_\_\_

MODEL NO 型 号: \_\_\_\_\_ HDAF38A1Dc SIP5Dc \_\_\_\_\_

PREPARED 编 制: \_\_\_\_\_ CHECKED 审 核: \_\_\_\_\_

APPROVED 批 准: \_\_\_\_\_ D A T E 日 期: \_\_\_\_\_ 2006-5-29 \_\_\_\_\_

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司  
Shoulder Electronics Limited

## 更改历史记录 History Record

更改日期 Date	规格书编号 Spec. No.	产品型号 Part No.	客户产品型号 Customer No.	更改内容描述 Modify Content	备注 Remark

## 1.SCOPE


SHOULDER's SAW filter series have broad line up products meeting all broadcast standard including NTSC,PAL and SECAM systems. These filters are composed of two interdigital transducers on a single-crystal, piezoelectrical chip. they are used in electronic equipments such as TV and so on.

## 2.Construction


### 2.1 Dimension and materials

Manufacturer's name :SHOULDER ELECTRONICS LIMITED

Type : AF38A1Dc

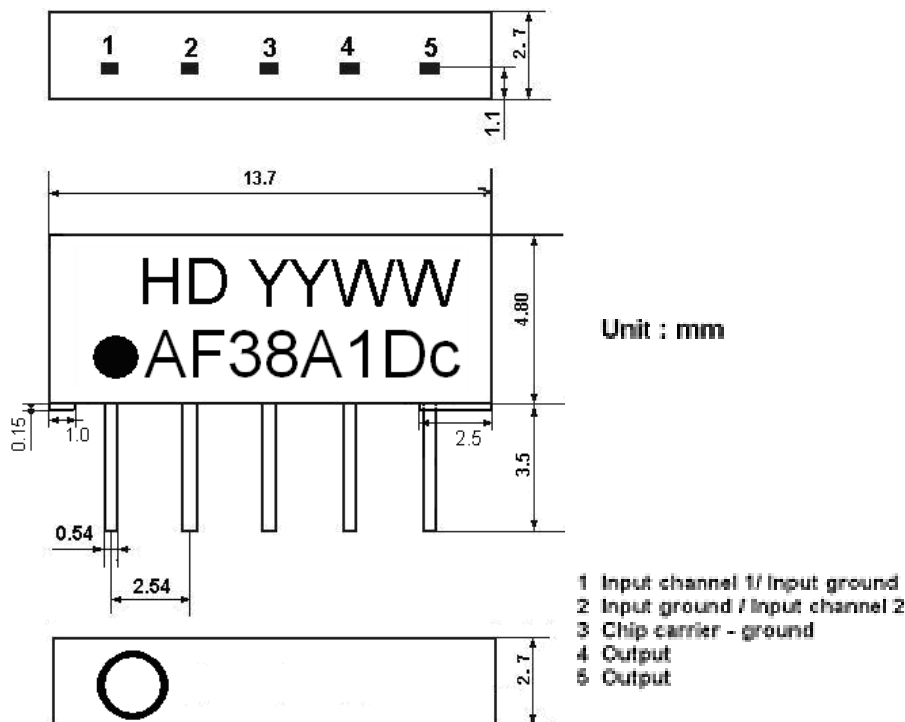


YY:year  
WW:week

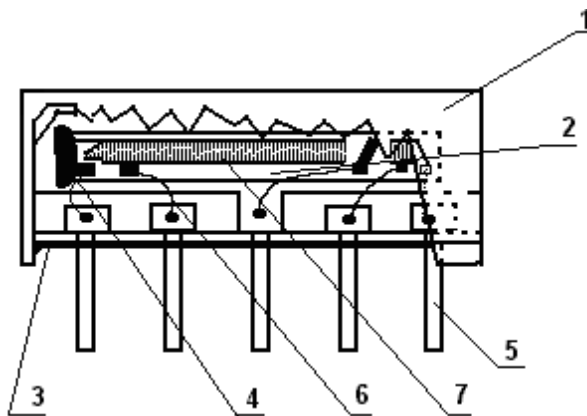

Components	Materials
1.Outer casing	PPS
2.Substrate	Lithium niobate
3.Base	Epoxy resin
4.Absorber	Epoxy resin
5.Lead	Cu alloy+Au plate
6.Bonding wire	AlSi alloy
7.Electrode	Al

## 2.2. Circuit construction, measurement circuit

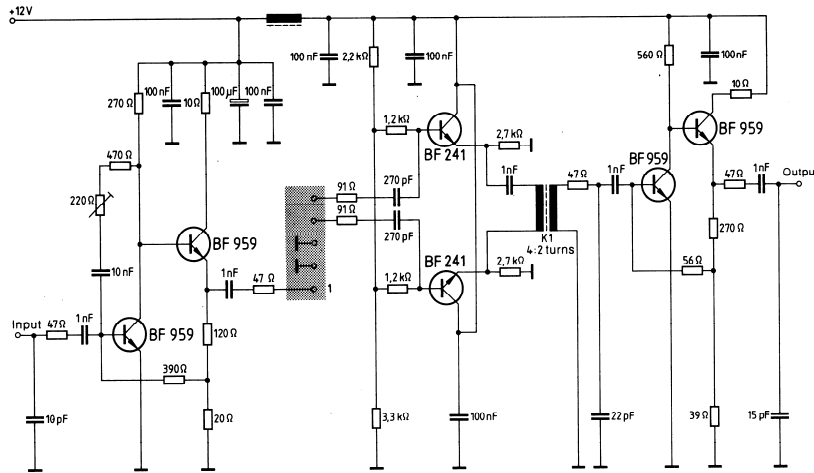

Test circuit for SIP-5 filter

Input impedance of the symmetrical post-amplifier: 2 kΩ in parallel with 3 pF

## 3.Characteristics

Items	Conditions	Specifications
Standard atmospheric conditions	Unless otherwise specified , the standard range of atmospheric conditions for making measurements and tests is as follows; Ambient temperature : 15℃ to 35℃ Relative humidity : 25% to 85% Air pressure : 86kPa to 106kPa	There shall be no damage.
Operating temperature rang	Operating temperature rang is the rang of ambient temperatures in which the filter can be operated continuously. -20℃ ~ +60℃	
Storage temperature rang	Storage temperature rang is the rang of ambient temperatures at which the filter can be stored without damage. Conditions are as specified elsewhere in these specifications. -40℃ ~ +70℃	
Reference temperature	+25℃	

### 3.1 Maximum Rating

<b>DC voltage</b>	<b>VDC</b>	<b>12</b>	<b>V</b>	<b>Between any terminals</b>
<b>AC voltage</b>	<b>Vpp</b>	<b>10</b>	<b>V</b>	<b>Between any terminals</b>

### 3.2 Electrical Characteristics

#### Characteristics of channel 1

Source impedance

$Z_s=50\ \Omega$

Load impedance

$Z_L=2k\ \Omega // 3pF$

$T_A=25^\circ C$

Item	Freq	min	typ	max	
Insertion attenuation Reference level	32.50MHz	11.6	14.6	17.6	dB
Relative attenuation	31.45MHz	-2.3	-0.8	0.7	dB
	31.50MHz	-2.3	-0.8	0.7	dB
	32.00MHz	-1.7	-0.2	1.3	dB
	38.00MHz	40.0	50.0	-	dB
	33.57MHz	22.0	42.0	-	dB
	30.00MHz	29.0	52.0	-	dB
	39.50MHz	40.0	50.0	-	dB
Sidelobe	25.00~30.00MHz	30.0	42.0	-	dB
	38.00~45.00MHz	35.0	42.0	-	dB
Temperature coefficient		-72			ppm/k

#### Characteristics of channel 2

Source impedance

$Z_s=50\ \Omega$

Load impedance


$Z_L=2k\ \Omega // 3pF$

$T_A=25^\circ C$

Item	Freq	min	typ	max	
Insertion attenuation Reference level	33.50MHz	11.6	14.6	17.6	dB
Relative attenuation	38.00MHz	40.0	52.0	-	dB
	34.42MHz	20.0	38.0	-	dB
	32.00MHz	20.0	45.0	-	dB
	39.50MHz	40.0	50.0	-	dB
Sidelobe	25.00~32.00MHz	20.0	32.0	-	dB
	38.00~45.00MHz	35.0	42.0	-	dB
Temperature coefficient		-72			ppm/k

### 3.3 Environmental Performance Characteristics

Item	Condition	Specifications
High temperature	The specimen shall be store at a temperature of $80\pm 2^\circ C$ for $96\pm 4h$ . Then it shall be subjected to standard atmospheric conditions for 1h, after	

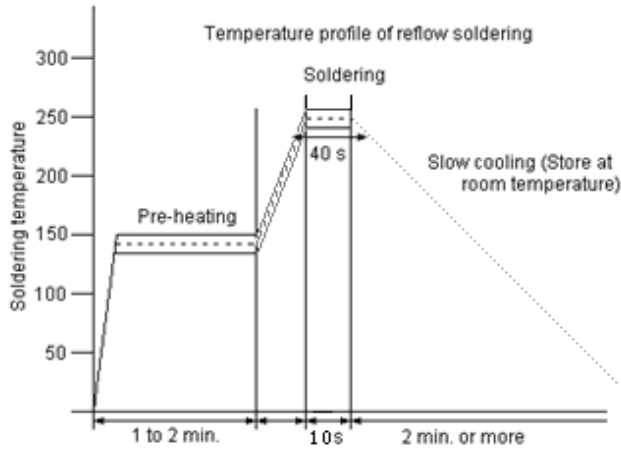
	which measurement shall be made within 1h.																						
Low temperature	The specimen shall be store at a temperature of $-20\pm 3^{\circ}\text{C}$ for $96\pm 4\text{h}$ . Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.																						
Humidity	The specimen shall be store at a temperature of $40\pm 2^{\circ}\text{C}$ with relative humidity of 90% to 96% for $96\pm 4\text{h}$ . Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.																						
Thermal shock	<p>The specimen shall be subjected to 8 continuous cycles each as shown below. Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.</p> <table border="1"> <thead> <tr> <th></th><th>Temperature</th><th>Duration</th></tr> </thead> <tbody> <tr> <td>1</td><td><math>+25^{\circ}\text{C} \Rightarrow -40^{\circ}\text{C}</math></td><td>0.5h</td></tr> <tr> <td>2</td><td><math>-40^{\circ}\text{C}</math></td><td>4h</td></tr> <tr> <td>3</td><td><math>-40^{\circ}\text{C} \Rightarrow +85^{\circ}\text{C}</math></td><td>2h</td></tr> <tr> <td>4</td><td><math>+85^{\circ}\text{C}</math></td><td>4h</td></tr> <tr> <td>5</td><td><math>+85^{\circ}\text{C} \Rightarrow +25^{\circ}\text{C}</math></td><td>0.5h</td></tr> <tr> <td>6</td><td><math>+25^{\circ}\text{C}</math></td><td>1h</td></tr> </tbody> </table>		Temperature	Duration	1	$+25^{\circ}\text{C} \Rightarrow -40^{\circ}\text{C}$	0.5h	2	$-40^{\circ}\text{C}$	4h	3	$-40^{\circ}\text{C} \Rightarrow +85^{\circ}\text{C}$	2h	4	$+85^{\circ}\text{C}$	4h	5	$+85^{\circ}\text{C} \Rightarrow +25^{\circ}\text{C}$	0.5h	6	$+25^{\circ}\text{C}$	1h	
	Temperature	Duration																					
1	$+25^{\circ}\text{C} \Rightarrow -40^{\circ}\text{C}$	0.5h																					
2	$-40^{\circ}\text{C}$	4h																					
3	$-40^{\circ}\text{C} \Rightarrow +85^{\circ}\text{C}$	2h																					
4	$+85^{\circ}\text{C}$	4h																					
5	$+85^{\circ}\text{C} \Rightarrow +25^{\circ}\text{C}$	0.5h																					
6	$+25^{\circ}\text{C}$	1h																					
Resistance to Soldering heat	<p>Reflow soldering method</p> <p>Peak: <math>255 \pm 5^{\circ}\text{C}</math>, <math>220 \pm 5^{\circ}\text{C}</math>, 40s</p> <p>At electrode temperature of the specimen.</p>  <p>The specimen shall be passed through the reflow furnace with the condition shown in the above profile for 1 time.</p> <p>The specimen shall be stored at standard atmospheric conditions for 1h, after which the</p>	<p>Mechanical characteristics and specifications in electrical characteristics shall be satisfied. There shall be no excessive change in appearance.</p>																					

	measurement shall be made. Test board shall be 1.6 mm thick. Base material shall be glass fabric base epoxy resin.	
Solder ability	Immerse the pins melt solder at 260°C+5/-0°C for 5 sec.	More then 95% of total area of the pins should be covered with solder

### 3.4Mechanical Test


Items	Conditions	Specifications
Vibration	600-3300rpm amplitude 1.5mm 3 directions 2 H each	There shall be no damage.
Drop	On maple plate from 1m high 3 times	
Lead pull	Pull with 1kg force for 30 seconds	
Lead bend	90° bending with 500g weigh 2 times	

### 3.5Voltage Discharge Test

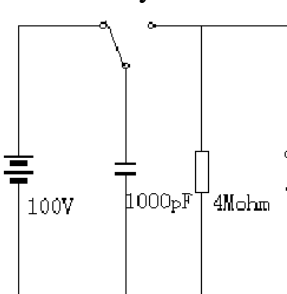Item	Condition	Specifications
Surge	Between any two electrode 	There shall be no damage


### 3.6 Frequency response

#### Frequency response of channel 1:

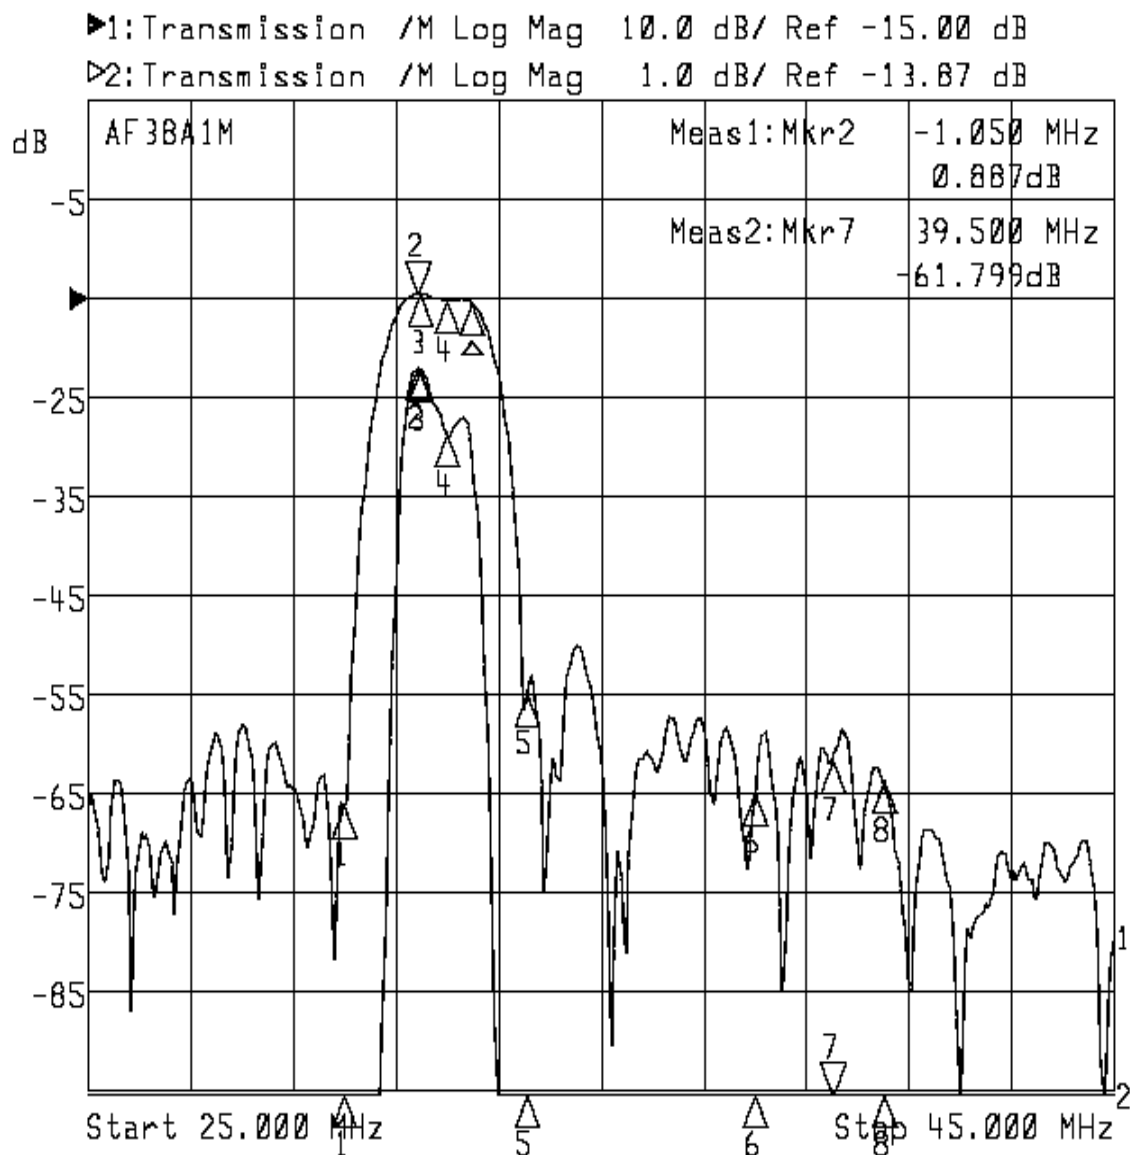

1: Mkr (MHz)	dB	2: Mkr (MHz)	dB
1: -2.5000	-50.849	1: 30.0000	-66.303
2> -1.0500	0.887	2: 31.4500	-14.576
3: -1.0000	0.850	3: 31.5000	-14.587
4: -0.5000	0.204	4: 32.0000	-15.243
5: 1.0700	-39.509	5: 33.5700	-54.936
6: 5.5000	-49.552	6: 38.0000	-64.972
7: 7.0000	-46.355	7> 39.5000	-61.799
8: 8.0000	-48.227	8: 40.5000	-63.688

### Frequency response of channel 2:

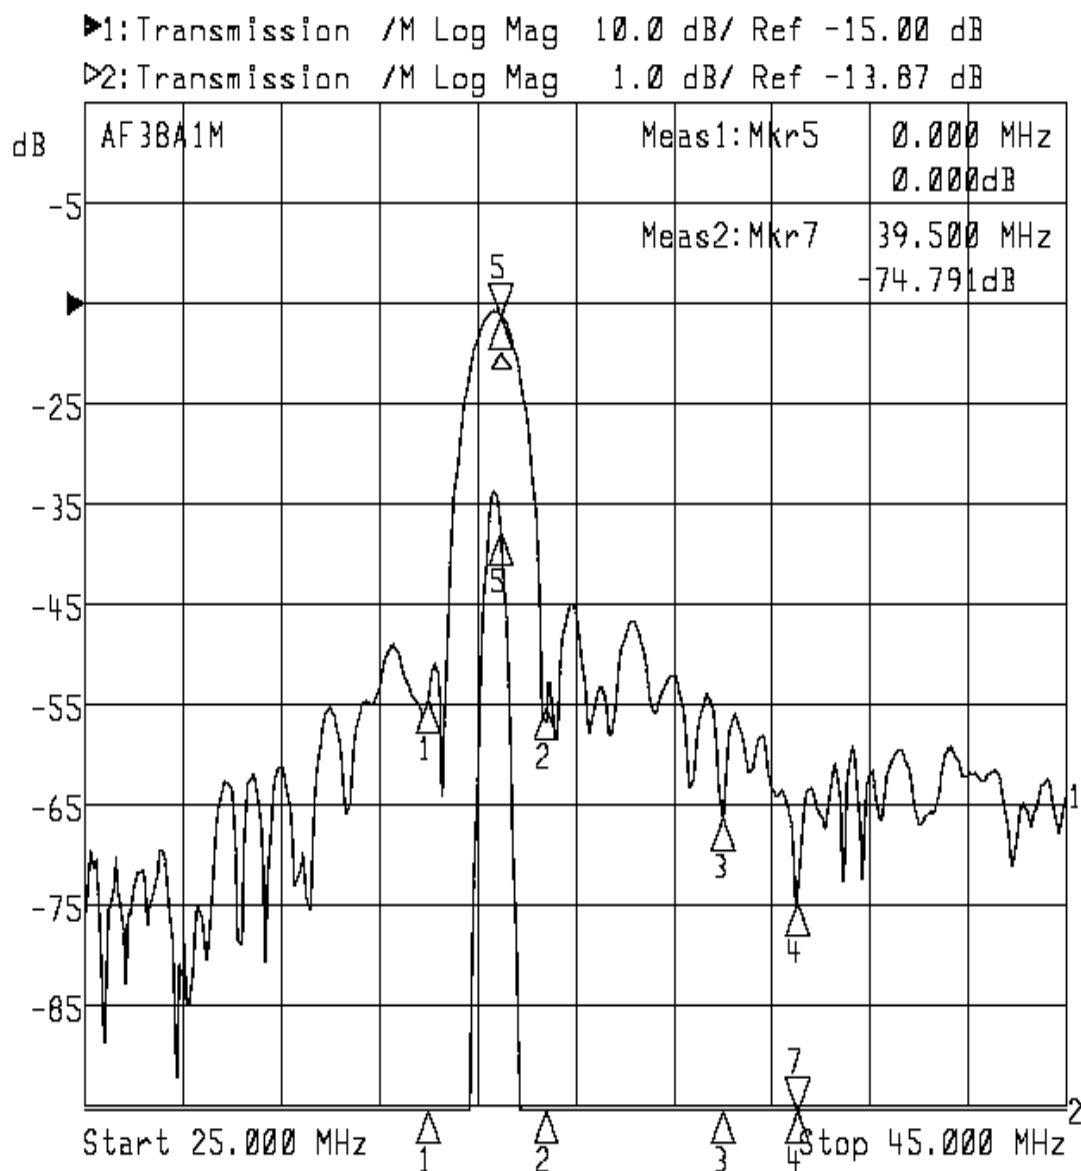

1: Mkr Δ(MHz)	dB	2: Mkr (MHz)	dB
1: -1.5000	-38.294	1: 32.0000	-54.435
2: 0.9200	-39.076	2: 34.4200	-55.216
3: 4.5000	-50.114	3: 38.0000	-66.230
4: 6.0000	-58.673	4: 39.5000	-74.791
5: 0.0000	0.000	5: 33.5000	-16.136
		7: 39.5000	-74.791