


1. Package Dimension

Unit:mm

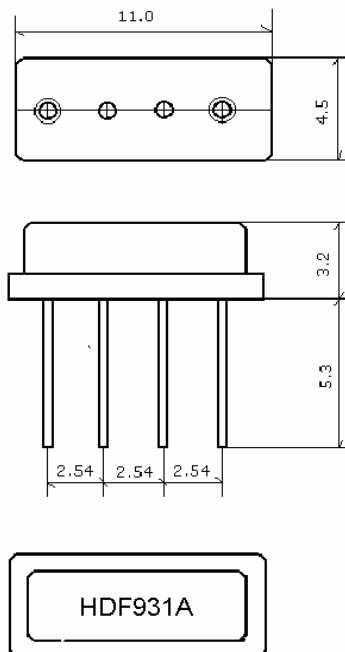

2. Marking HD F931A

2.1 Color: Black or Blue

2.2 930.5: Center Frequency (MHz)

3. Performance

3.1 Application

Low-Loss SAW Filter of cordless system.

Center Frequency:930.5 MHz

3.2 Maximum Rating


Operation Temperature Range	-10 to +50
Storage Temperature Range	-40 to +85
DC. Permissive Voltage	10 V DC. max.
Maximum Input Power	0dBm

3.3 Electronic Characteristics


Item	Frequency	Specificatio
Center Frequency(f_0)	930.5MHz	
Pass Band Width	$F_0 \pm 2.0\text{MHz}$	
Insertion Loss	Passband	4.5dB max.
Stop Band Rejection	$F_0-400\sim-40.8\text{MHz}$ $F_0+50\sim+400\text{MHz}$	47dB min. 47dB min.
Terminating Impedance		50 Ω <10nH
Operating Temperature		-10 To +70

Range		
-------	--	--

3.4 Frequency Characteristics

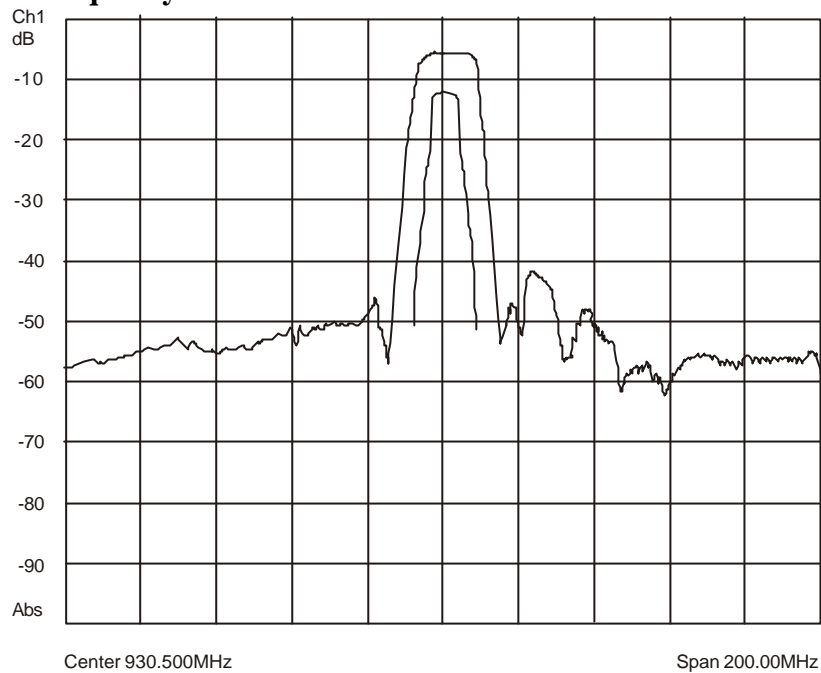

3.5 Test Circuit

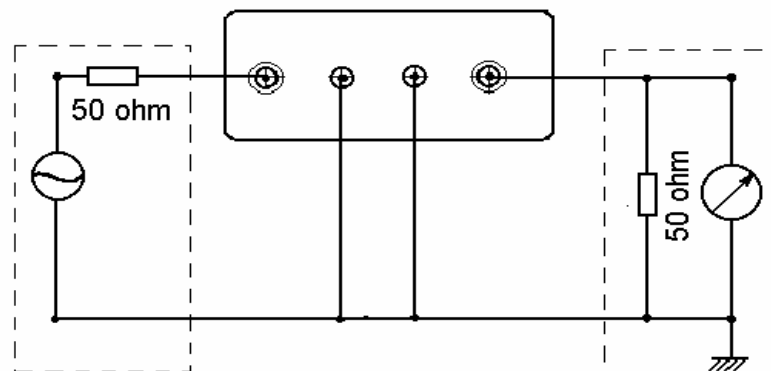

4. ENVIRONMENTAL CHARACTERISTICS

4-1 High temperature exposure

Subject the filter to +80 for 96 hours. Then release the filter into the room conditions for 1 to 2 hours prior to the measurement. It shall fulfill the specifications .

4-2 Moisture

Keep the filter at 40 and 95% Rh. for 96 hours . then release the filter into the room conditions for 1 to 2 hours prior to the measurement. It shall fulfill the specifications .

4-3 Low temperature exposure

Subject the filter to -20 for 96 hours. Then release the filter into the room conditions for 1 to 2 hours prior to the measurement. It shall fulfill the specifications.

4-4 Temperature cycling

Subject the filter to a low temperature of -55 for 30 minutes. Following by a high temperature of +85 for 30 Minutes. Then release the filter into the room conditions for 1 to 2 hours prior to the measurement. It shall meet the specifications.

4-5 Resistance to solder heat

Dip the filter terminals no closer than 1.5mm into the solder bath at 270 ± 10 for 10 ± 1 sec. Then release the Filter into the room conditions for 1 to 2 hours. The Filter shall meet the specifications.

4-6 Mechanical shock

Drop the filter randomly onto the concrete floor from the height of 30cm 3 times .the filter shall fulfill the specifications.

4-7 Vibration

Subject the filter to the vibration for 1 hour each in x,y and z axes with the amplitude of 1.5 mm at 10 to 55 Hz. The filter shall fulfill the specifications.

4-8 Lead fatigue

4-8-1 Pulling test

Weight along with the direction of lead without an shock 3 kg. The filter shall satisfy all the initial Characteristics.

4-8-2 Bending test

Lead shall be subject to withstand against 90 bending in the direction of thickness. This operation shall be done toward both direction. The filter shall show no evidence of damage and shall satisfy all the initial electrical characteristics.

5. REMARK

5.1 Static voltage

Static voltage between signal load & ground may cause deterioration & destruction of the component. Please avoid static voltage.

5.2 Ultrasonic cleaning

Ultrasonic vibration may cause deterioration & destruction of the component. Please avoid ultrasonic cleaning

5.3 Soldering

Only leads of component may be soldered . Please avoid soldering another part of component.