

## 1.SCOPE


SHOULDER's SAW filter series have broad line up products meeting all broadcast standard including NTSC,PAL and SECAM systems. These filters are composed of two interdigital transducers on a single-crystal. piezoelectrical chip. they are used in electronic equipments such as TV and so on.

## 2.Construction

### 2.1 Dimension and materials


Manufacturer's name : SHOULDER ELECTRONICS LIMITED

Type : MIF38A1M

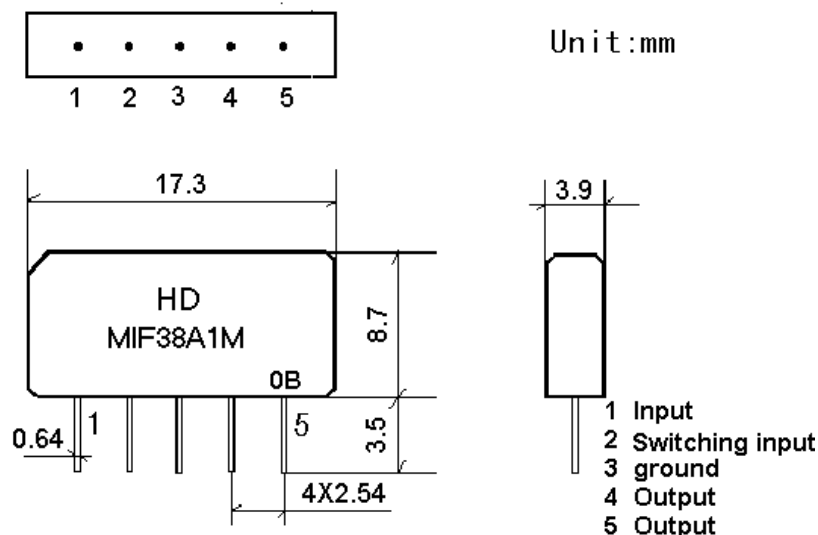


0: year(0,1,2,3,4,5,6,7,8,9)

B:product in this quarter(A:1~3,B:4~6,C:7~9,D:10~12)

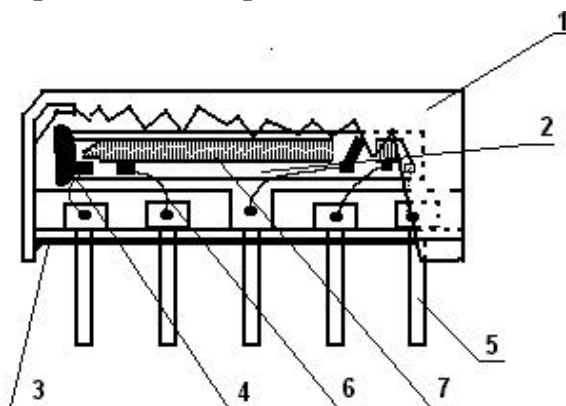

| Components     | Materials         |
|----------------|-------------------|
| 1.Outer casing | PPS               |
| 2.Substrate    | Lithium niobate   |
| 3.Base         | Epoxy resin       |
| 4.Absorber     | Epoxy resin       |
| 5.Lead         | Cu alloy+Au plate |
| 6.Bonding wire | AlSi alloy        |
| 7.Electrode    | Al                |

## 2.2. Circuit construction, measurement circuit

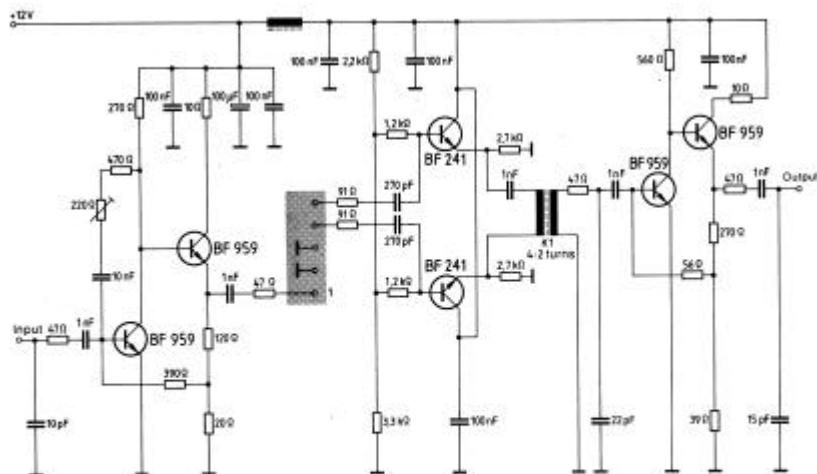

Test circuit for SIP-5 filter

Input impedance of the symmetrical post-amplifier: 2 k $\Omega$  in parallel with 3 pF

## 3.Characteristics

### Standard atmospheric conditions

Unless otherwise specified , the standard range of atmospheric conditions for making measurements and tests is as follows;

- Ambient temperature : 15 to 35
- Relative humidity : 25% to 85%
- Air pressure : 86kPa to 106kPa

### Operating temperature rang

Operating temperature rang is the rang of ambient temperatures in which the filter can be

operated continuously. -10 ~ +60

### Storage temperature rang

Storage temperature rang is the rang of ambient temperatures at which the filter can be stored

without damage.

Conditions are as specified elsewhere in these specifications. -40 ~ +70

### Reference temperature +25

## 3.1 Maximum Rating

|            |     |    |   |                       |
|------------|-----|----|---|-----------------------|
| DC voltage | VDC | 12 | V | Between any terminals |
| AC voltage | Vpp | 10 | V | Between any terminals |

**3.2 Electrical Characteristics****Characteristics in BG/I/DK,M/N mode (switching input pin 2 connected to ground pin****3 )**

Source impedance

 $Z_s=50$ 

Load impedance

 $Z_L=2k \quad //3pF$  $T_A=25$ 

| Item   | Freq           | min  | typ  | max  |       |
|--|----------------|------|------|------|-------|
| Insertion attenuation<br>Reference level   | 36.50MHz       | 15.7 | 17.7 | 19.7 | dB    |
| Relative attenuation   | 38.00MHz       | 4.2  | 5.7  | 7.2  | dB    |
|  | 33.57MHz       | -0.3 | 1.2  | 2.7  | dB    |
|  | 31.50MHz       | 18.0 | 20.0 | 22.0 | dB    |
|  | 32.50MHz       | 17.6 | 19.6 | -    | dB    |
|  | 30.00MHz       | 40.0 | 50.0 | -    | dB    |
|  | 31.00MHz       | 37.0 | 54.0 | -    | dB    |
|  | 39.50MHz       | 40.0 | 45.0 | -    | dB    |
|  | 40.50MHz       | 36.0 | 42.0 | -    | dB    |
| Sidelobe   | 25.00~30.00MHz | 35.0 | 44.0 |      | dB    |
|  | 39.50~45.00MHz | 32.0 | 39.0 |      | dB    |
| <b>Reflected wave signal suppression</b><br>1.3 us ... 6.0 us after main pulse<br>(test pulse 250 ns ,<br>carrier frequency 36.50 MHz) |                | 40.0 | 50.0 |      | dB    |
| <b>Feedthrough signal suppression</b><br>1.2 us ... 6.0 us after main pulse<br>(test pulse 250 ns ,<br>carrier frequency 36.50 MHz)    |                | 42.0 | 52.0 |      | dB    |
| Temperature coefficient  |                | -72  |      |      | ppm/k |

**Characteristics in M/N mode (switching input pin 2 connected to input pin 1 )**

Source impedance

 $Z_s=50$ 

Load impedance

 $Z_L=2k \quad //3pF$  $T_A=25$ 

| Item   | Freq           | min  | Typ  | max  |    |
|--|----------------|------|------|------|----|
| Insertion attenuation<br>Reference level   | 36.50MHz       | 15.5 | 17.5 | 19.5 | dB |
| Relative attenuation   | 38.00MHz       | 4.7  | 6.2  | 7.7  | dB |
|  | 34.42MHz       | 2.3  | 3.8  | 5.3  | dB |
|  | 33.50MHz       | 17.8 | 19.8 | 21.8 | dB |
|  | 32.00MHz       | 37.0 | 45.0 | -    | dB |
|  | 39.50MHz       | 35.0 | 43.0 | -    | dB |
| Sidelobe   | 25.00~32.00MHz | 35.0 | 41.0 |      | dB |
|  | 39.50~45.00MHz | 30.0 | 37.0 |      | dB |
| <b>Reflected wave signal suppression</b><br>1.3 us ... 6.0 us after main pulse<br>(test pulse 250 ns ,<br>carrier frequency 36.50 MHz) |                | 40.0 | 50.0 |      | dB |
| <b>Feedthrough signal suppression</b><br>1.2 us ... 6.0 us after main pulse<br>(test pulse 250 ns ,<br>carrier frequency 36.50 MHz)    |                | 42.0 | 48.0 |      | dB |

|                         |     |       |
|-------------------------|-----|-------|
| Temperature coefficient | -72 | ppm/k |
|-------------------------|-----|-------|


**3.3 Environmental Performance Characteristics**

| Item Test condition  | Allowable change of absolute Level at center frequency(dB)            |
|--|---|
| High temperature test<br>70 1000H                                    | < 1.0   |
| Low temperature test<br>-40 1000H                                    | < 1.0   |
| Humidity test<br>40 90-95% 1000H                                     | < 1.0   |
| Thermal shock<br>-20 ==25 ==80 20 cycle<br>30M 10M 30M               | < 1.0   |
| Solder temperature test<br>Sold temp.260 for 10 sec.                 | < 1.0   |
| Soldering<br>Immerse the pins melt solder<br>at 260 +5/-0 for 5 sec. | More then 95% of total area of the pins should be covered with solder |

**3.4 Mechanical Test**

| Item Test condition  | Allowable change of absolute Level at center frequency(dB) |
|--|--|
| Vibration test<br>600-3300rpm amplitude 1.5mm<br>3 directions 2 H each | <1.0   |
| Drop test<br>On maple plate from 1 m high 3 times                      | <1.0   |
| Lead pull test<br>Pull with 1 kg force for 30 seconds                  | <1.0   |
| Lead bend test<br>90° bending with 500g weigh 2 times                  | <1.0   |

**3.5 Voltage Discharge Test**
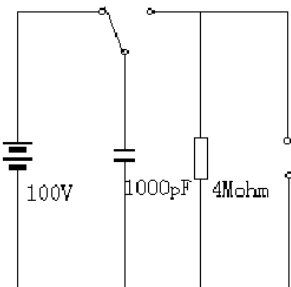
| Item Test condition  | Allowable change of absolute Level at center frequency(dB) |
|--|--|
| Surge test<br>Between any two electrode<br><br> | <1.0   |

