

Type: ASK/OOK Super-Heterodyne Receiver Module
Model: CY60-XXX

1. DESCRIPTION:

The CY60 is a ASK/OOK compatible super heterodyne wireless receiving module with high performance for ISM frequency band. With the adoption of European brand RF wireless data transferring/receiver chipsets. The model has a high receiving sensitivity and strong ability of resisting. From wireless signal input to data output can be done without any electrical circuit. User only use extra simple data decode circuit can achieve wireless products development.

CY60 is for industrial level version.



2. FEATURES:


- Frequency: 315MHz/433.92MHz/868.35/915MHz (custom frequency is available);
- High sensitivity -110dBm@433.92 1kbps BER10E-2;
- Supply voltage: VCC= 3.6to 5.5 V;
- IF band: 230KHz;
- Low power consumption: 4.8mA@315M, 6mA@433.92M.
- Wide operating temperature;
- Excellent selectivity and noise rejection;

- Analog RSSI Output(only for V2.0) ;
- SIL(single in line) small package

3. APPLICATION:

- Remote gate controls
- Remote keyless entry
- Car alarm systems
- wireless security systems
- Automation systems

4. PIN DEFINITION:

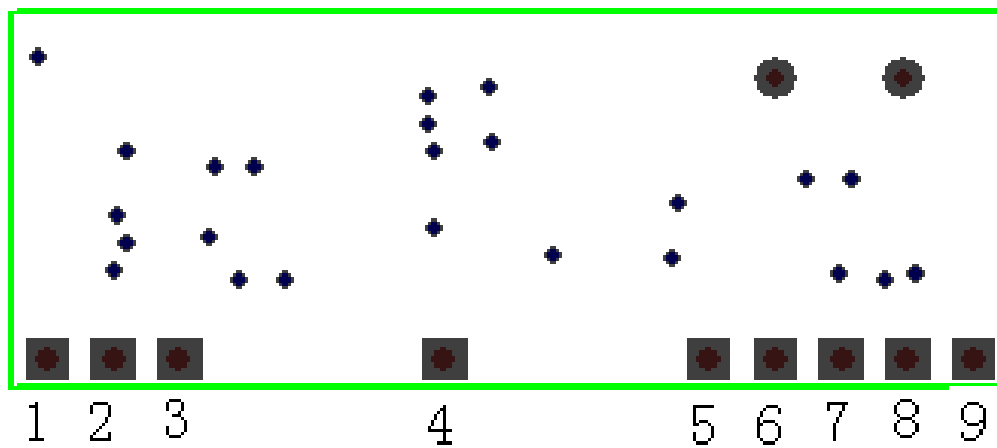

No	Pin Name	Pin Definition
1	VCC	Positive Power Supply
2	GND	Ground
3	ANT	Antenna
4	GND	Ground
5	GND	Ground
6	VCC	Positive Power Supply
7	RSSI	Indication of Signal Strength
8	DATA	Data Out
9	EN	Enable Mode. Working Mode in low level input.

Note1: ANT pin is a 50 ohm antenna input. The length is about:

- 23cm for 315Mhz
- 17cm for 433.92Mhz
- 8.6cm for 868.35Mhz
- 8.2cm for 915Mhz

5. ELECTRICAL CHARACTERISTICS:

Condition: Ta=25°C Vcc=5.0V Frequency=315MHz

Parameter	Specification			Unit	Condition
	Min	Typ	Max		
Frequency Range	314.90	315	315.10	MHz	Others available
Receiver Sensitivity		-110		dBm	BER=10E-2
Data Rate	0.58	1.2	9.6	Kbps	Manchester code
Supply Voltage, VDD	3.6	5	5.5	V	DC
Current	4.8		6	mA	
Operating Temperature	-40		+85	°C	

Condition: Ta=25°C Vcc=5.0V Frequency=433.92MHz




Parameter	Specification			Unit	Condition
	Min	Typ	Max		
Frequency Range	433.82	433.92	434.02	MHz	Others available
Receiver Sensitivity		-110		dBm	BER=10E-2
Data Rate	0.58	1.2	9.6	KBaud	Manchester code
Supply Voltage, VDD	3.6	5	5.5	V	DC
Current	4.8		6.0	mA	
Operating Temperature	-40		+85	°C	

Condition: Ta=25°C Vcc=5.0V Frequency=868.35MHz/915MHz

Parameter	Specification			Unit	Condition
	Min	Typ	Max		
Frequency Range		868.35/915		MHz	
Receiver Sensitivity	-108	-110	-110	dBm	BER=10E-2
Data Rate	0.58	1.2	9.6	KBaud	
Supply Voltage, VDD	3.6		5.5	V	DC
Current		9		mA	
Operating Temperature	-40		+85	°C	

6. MECHANICAL SIZE: (UNIT: mm)

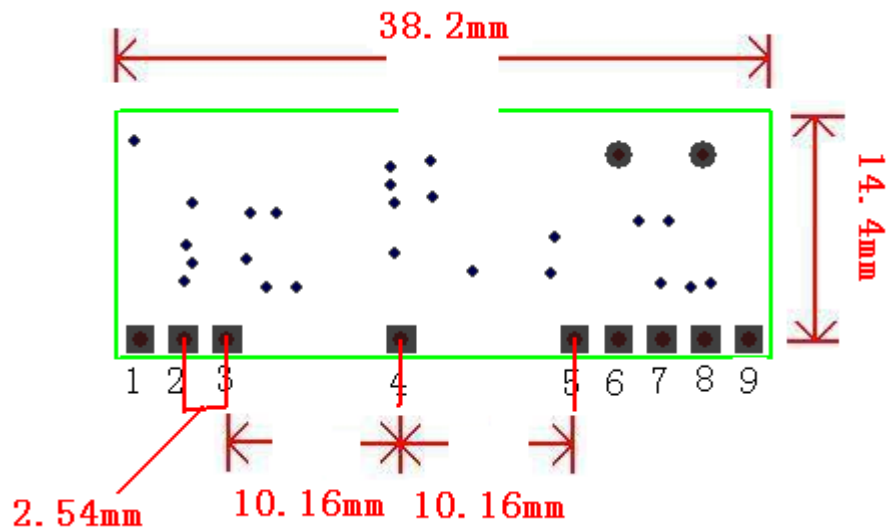

7. ORDER INFORMATION:

CY60 – 433.92M

CY----Brand Name

60—Receiver model number

433.92M---Working Frequency in 433.92Mhz

For more information and assistance, please contact us as follows:

CY WIRELESS TECHNOLOGY LIMITED

Add: 1407, Block C, Tairan Building, 8th Tairan Road, Futian District,

Shenzhen, Guangdong Province, China

Website: www.rficy.com

Email: info@rficy.com