

HC49U Series

Crystal unit



RoHS & REACH compliant
 Metal can Through hole type quartz crystal unit
 Wide frequency range
 Cropped lead and with insulating washer options




Parameters		Specification	Remarks
Frequency range	F_nom	1.8432MHz ~ 150.0MHz	Table 1
Frequency tolerance	F_tol	±5.0ppm ~ ±100.0ppm	
Frequency stability over operating temperature range	F_stb	±5.0ppm ~ ±50.0ppm	Table 2
Operating temperature range	T_use	-10°C ~ +60°C, -20°C ~ +70°C, -40°C ~ +85°C	Table 2
Storage temperature	T_stg	-55°C ~ +125°C	
Load capacitance	CL	5.0pF ~ 32.0pF, Series	
Equivalent series resistance	ESR	Table 1	
Shunt capacitance	C0	7.0pF max	
Drive level	DL	500µW max	100µW typical
Frequency aging	F_age	±3.0ppm/year at 25°C	
Moisture sensitivity level	MSL	1 (unlimited)	
Electrostatic discharge	ESD	Not applicable	
Insulation resistance	IR	500MΩ min	At 100V DC

Frequency Range	ESR
1.8432MHz ~ 3.000MHz	300Ω
3.000MHz ~ 3.500MHz	150Ω
3.500MHz ~ 4.000MHz	90Ω
4.000MHz ~ 7.000MHz	60Ω
7.000MHz ~ 15.000MHz	35Ω
15.000MHz ~ 30.000MHz	25Ω

Frequency Range	ESR
20.000MHz ~ 25.000MHz (3 rd overtone)	50Ω
25.000MHz ~ 30.000MHz (3 rd overtone)	40Ω
30.000MHz ~ 75.000MHz (3 rd overtone)	40Ω
75.000MHz ~ 100.000MHz(3 rd overtone)	60Ω
70.000MHz ~ 100.000MHz(5 th overtone)	60Ω
75.000MHz ~ 100.000MHz(5 th overtone)	60Ω
75.000MHz ~ 100.000MHz(5 th overtone)	60Ω

Temp. (°C)	Stability in ppm				
	±10	±15	±20	±30	±50
-10°C ~ 60°C	✓	✓	✓	✓	✓
-20°C ~ 70°C	✓	✓	✓	✓	✓
-40°C ~ 85°C	Enquire	✓	✓	✓	✓

Dimensions (mm)

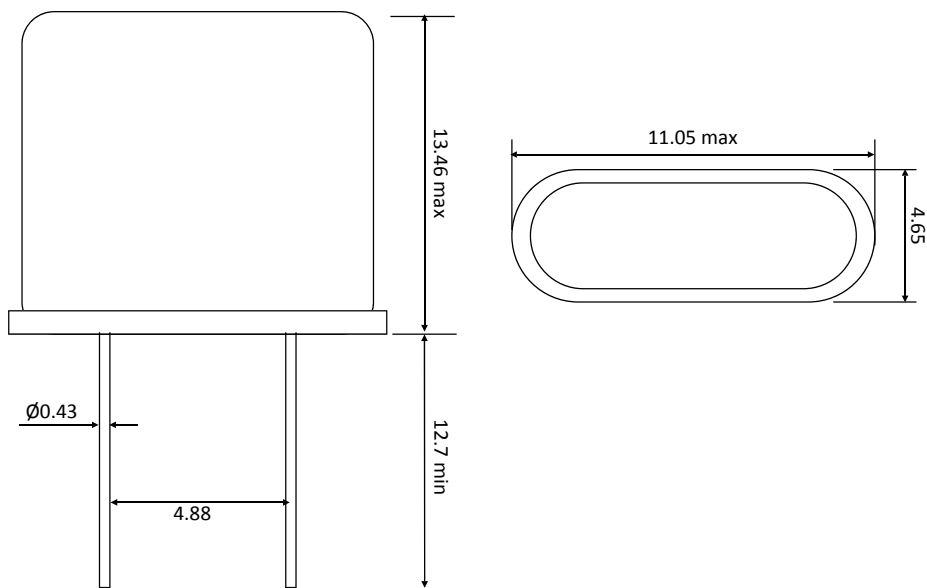

Cropped lead and crystal with washer fitted options are available ; Please check part numbering for ordering code.

ACT (A wholly owned Acal BFi Company)
+44 (0) 118 978 8878 | sales@act.co.uk | www.act.co.uk

ISO9001 Registered

Specifications subject to change without notification

HC49U Series

Crystal unit



Part number generation								
GO	2700	G	K	L	GO	F	L	-PF
ACT Series Code (H = height)	Frequency (MHz)	Frequency Tolerance (\pm ppm)	Frequency stability over temperature range (\pm ppm)	Operating Temperature Range ($^{\circ}$ C)	Load capacitance (CL -pF)	Frequency Mode	Packaging (Tape & Reel)	RoHS
HC49U std = GO <u>Cropped lead</u> 3.5mm = BD 5.0mm = BC 7.0mm = BB <u>Standard lead length with washer fitter</u> With washer = SA	8MHz = 0800 27MHz = 2700 Note: Use the first 4 characters of the frequency in Hz i.e. 27MHz =27000000Hz If the frequency is 100MHz or higher then the first 5 characters are used	\pm 5 = A \pm 10 = E \pm 15 = F \pm 20 = G \pm 25 = H \pm 30 = I \pm 50 = L	\pm 10 = F \pm 15 = G \pm 20 = I \pm 25 = J \pm 30 = K \pm 50 = O	-10~+60 = E -20~+70 = G -40~+85 = M	8 = GO 9 = JO 10 = KO 11 = MO 12 = OO 13 = YO 14 = ZO 15 = PO 16 = RO 18 = TO 20 = VO 22 = WO 30 = DA SR = SR	F'mental = F 3 rd OT = A 5 th OT = B	Loose = L	RoHS = -pF
Note: It is important to suffix the above part number with full frequency required to give a completed part number as illustrated below. Full Example Part Number : GO2700GKLGOF-L-PF [27.000MHz] , GO2457GKLGOF-L-PF [24.576MHz] , GO0800GKLGOF-L-PF [8.000MHz]								

Additional information

Drawing control: (Internal use only)
 Commodity code: 854160 00 00
 Issue number: N1
 Date: 1/02/2017
 Internal reference: SCB