



Approved by:

Checked by:

Issued by:

# ***SPECIFICATION***

**PRODUCT: SAW FILTER**

**MODEL: HDBF41A2D**



**SHOULDER ELECTRONICS LIMITED**

## 1.SCOPE



SHOULDER's SAW filter series have broad line up products meeting all broadcast standard including NTSC,PAL and SECAM systems. These filters are composed of two interdigital transducers on a single-crystal, piezoelectrical chip. they are used in electronic equipments such as TV and so on.

## 2.Construction

### 2.1 Dimension and materials

Manufacturer's name : SHOULDER ELECTRONICS Co. LTD(CHINA)

Type : BF41A2D

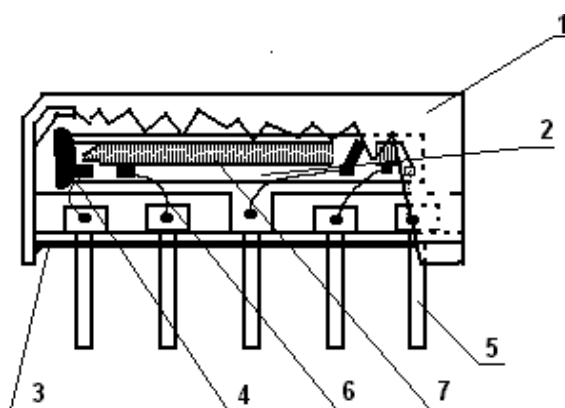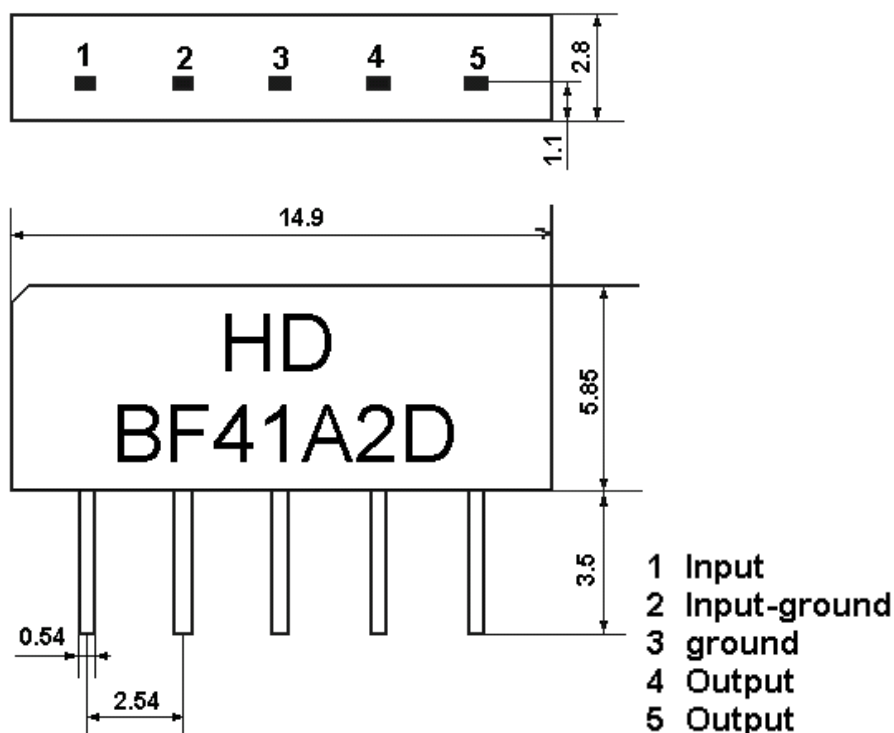

Components	Materials
1.Outer casing	PPS
2.Substrate	Lithium tantalate
3.Base	Epoxy resin
4.Absorber	Epoxy resin
5.Lead	Cu alloy+Au plate
6.Bonding wire	AlSi alloy
7.Electrode	Al



### 3.2 Electrical Characteristics

Source impedance

$Z_S=50\ \Omega$

Load impedance


$Z_L=2k\ \Omega //3pF$

$T_A=25^\circ C$

Item	Freq	min	typ	max	
Center frequency (center between 10dB point)	Fo	-	41.25	-	MHz
Insertion attenuation Reference level	41.25MHz	-	15.7	17.7	dB
Pass bandwidth	B3dB	-	0.5	-	MHz
	B30dB	-	1.7	2.0	MHz
Sidelobe	35.00~39.00MHz	35.0	52.0		dB
	39.00~40.05MHz	32.0	48.0		dB
	42.45~43.50MHz	32.0	48.0		dB
	43.50~55.00MHz	35.0	51.0		dB
Temperature coefficient		-18			ppm/k

### 3.3 Environmental Performance Characteristics


Item	Condition	Specifications		
High temperature	The specimen shall be store at a temperature of $80\pm 2^\circ C$ for $96\pm 4h$ . Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.	Mechanical characteristics and specifications in electrical characteristics shall be satisfied. There shall be no excessive change in appearance.		
Low temperature	The specimen shall be store at a temperature of $-20\pm 3^\circ C$ for $96\pm 4h$ . Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.			
Humidity	The specimen shall be store at a temperature of $40\pm 2^\circ C$ with relative humidity of 90% to 96% for $96\pm 4h$ . Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.			
Thermal shock	The specimen shall be subjected to 8 continuous cycles each as shown below. Then it shall be subjected to standard atmospheric conditions for 1h, after which measurement shall be made within 1h.			
			Temperature	Duration
	1		$+25^\circ C \Rightarrow -40^\circ C$	0.5h
	2	$-40^\circ C$	4h	
	3	$-40^\circ C \Rightarrow +85^\circ C$	2h	
	4	$+85^\circ C$	4h	
5	$+85^\circ C \Rightarrow +25^\circ C$	0.5h		
6	$+25^\circ C$	1h		
Resistance to Soldering heat	Reflow soldering method Peak: $255 \pm 5^\circ C$ , $220 \pm 5^\circ C$ , 40s At electrode temperature of the specimen.			

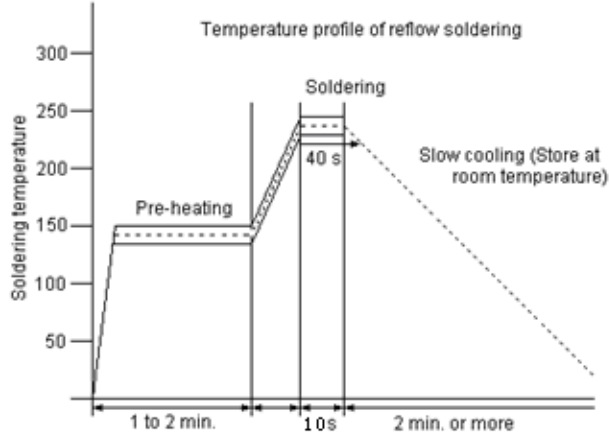	 <p>The specimen shall be passed through the reflow furnace with the condition shown in the above profile for 1 time. The specimen shall be stored at standard atmospheric conditions for 1h, after which the measurement shall be made. Test board shall be 1.6 mm thick. Base material shall be glass fabric base epoxy resin.</p>	
Solder ability	Immerse the pins melt solder at $260^{\circ}\text{C} +5/-0^{\circ}\text{C}$ for 5 sec.	More then 95% of total area of the pins should be covered with solder

### 3.4 Mechanical Test

Items	Conditions	Specifications
Vibration	600-3300rpm amplitude 1.5mm 3 directions 2 H each	There shall be no damage.
Drop	On maple plate from 1 m high 3 times	
Lead pull	Pull with 1 kg force for 30 seconds	
Lead bend	$90^{\circ}$ bending with 500g weigh 2 times	


### 3.5 Voltage Discharge Test

Item	Condition	Specifications
Surge	Between any two electrode 	There shall be no damage

### 3.6 Frequency response:

▶1: Transmission /M Log Mag 10.0 dB/ Ref -11.00 dB

▷2: Transmission /M Log Mag 1.0 dB/ Ref -9.93 dB

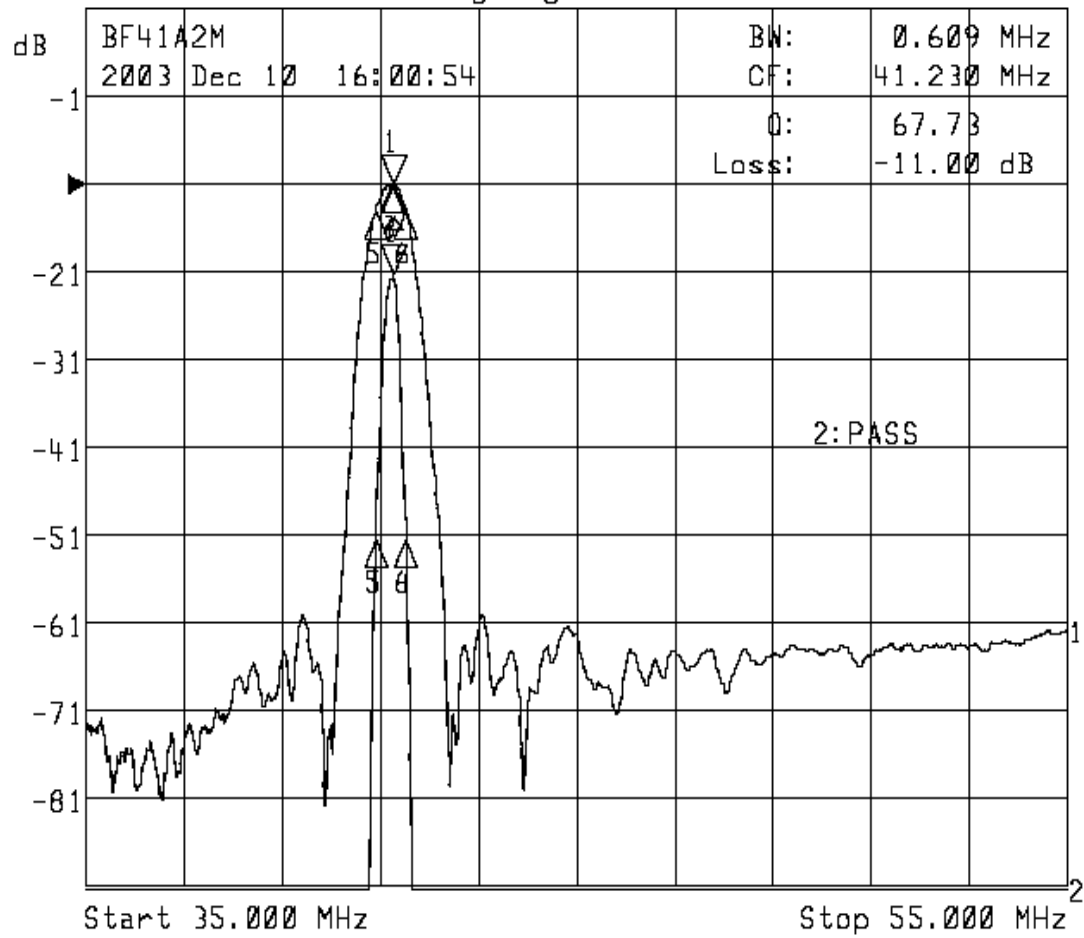

1: Mkr Δ(MHz)	dB	2: Mkr (MHz)	dB
1> 0.0000	0.000	1> 41.2750	-10.963
3: -0.0451	-0.024		
5: -0.3495	-3.000	5: 40.9255	-13.972
6: 0.2593	-3.000	6: 41.5343	-13.980