

1

2

3

4

SPECIFICATION

受 控

1. SCOPE

This specification is applied to the piezo-element.


2. SPECIFICATION

(at 25 °C)

- 2.1 Resonant Frequency : 4.2 ± 0.5KHz
- 2.2 Resonant Resistace : 100 Ω max
- 2.3 Capacitance : 130000pF ± 30% at 100Hz
- 2.4 Input Voltage : 30Vp-p max
- 2.5 Operating Temperature : -20~+70°C
- 2.6 Storage Temperature : -30~+80°C

3. DIMENSION

: as per figure

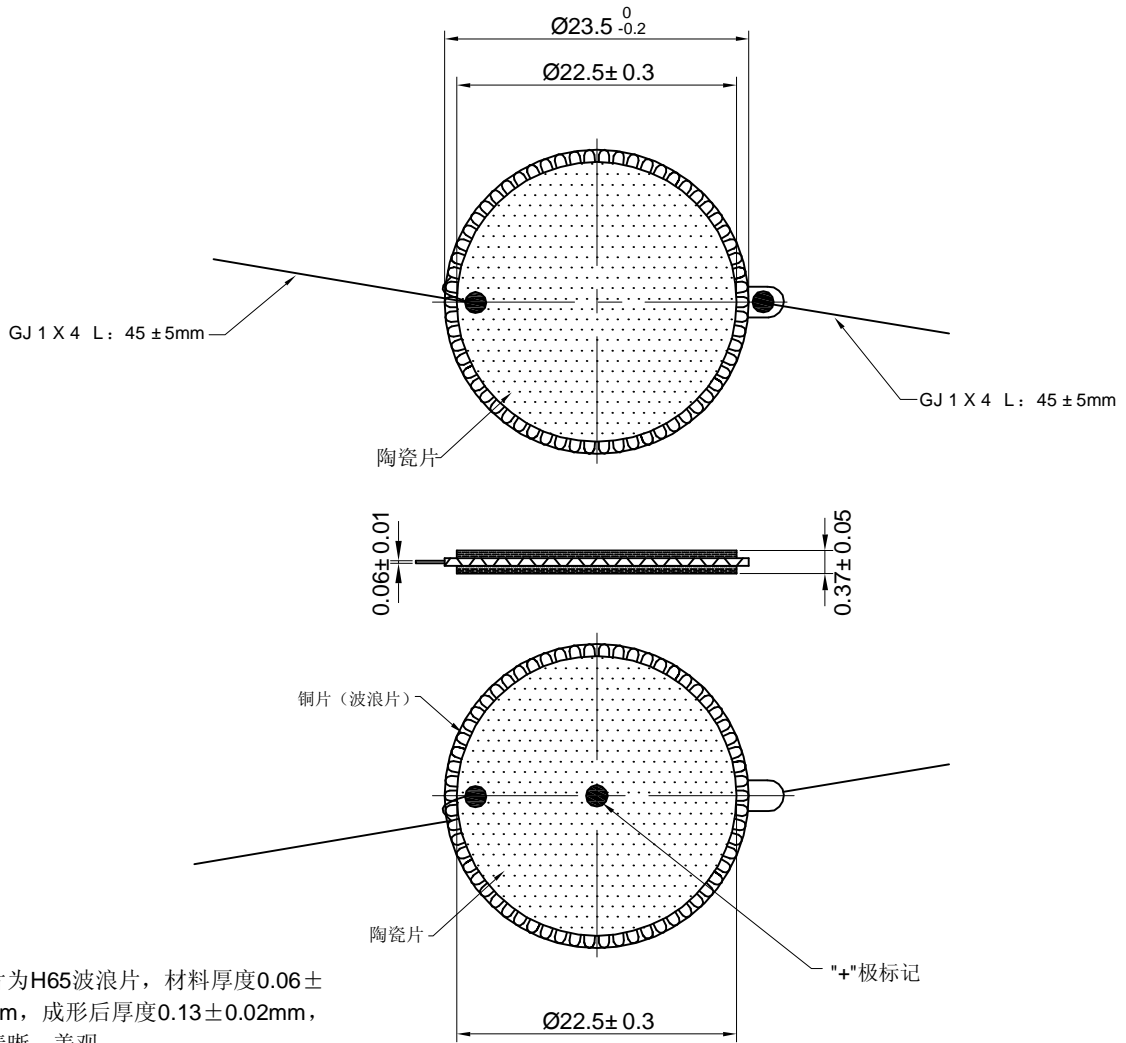

备注：
铜基片为H65波浪片，材料厚度0.06±0.01mm，成形后厚度0.13±0.02mm，成形清晰、美观

TOLERANCES UNLESS NOTED OTHERWISE .X ± .XX ± .XXX ± 90° FORMED +2° ANGLES -1°	DRAWN	汪逸	KEPO MODEL NO.	CUSTOMER		
	DESIGN		HFT-23.5T-4.2BSL	CUSTOMER NO.		
	CHECKED		DWG NO.			
	APPROVED	徐锦生	KP3.840.823	VER	1.1	SCALE
	DATE	11.07.25		UNIT	mm	SHEET
	CONTRACT NO.					
FIRST ANGLE PROJECTION	AGENCY APPROVAL		KEPO CO.,LTD. TEL:(+86)574-88370330 FAX:(+86)574-88370329			

1

2

3

4