


**KP-112 STROBE & BEACON**


**DIMENSIONS**



Acrylic Lens  
Black ABS Black  
Amber, Blue or Yellow available



Top View



Side View

all dimensions are in mm

<b>Model No</b>	<b>KP-112</b>
Rated Voltage	12DC
Operating Voltage	8 ~ 15VDC
Max.Rated Current	150mA/12VDC
Rated Falsh	80±10Per Minute
Installation	Tab Mounted
Operating Life	500Hours at 12VDC
Operating Temp	-20 ~ +60
Weight	165±5g


\* Value applying at rated voltage

**KP-113 STROBE & BEACON**


**DIMENSIONS**



Acrylic Lens  
Black ABS Black  
Amber, Blue or Yellow available



Side View



Top View

all dimensions are in mm

<b>Model No</b>	<b>KP-113</b>
Rated Voltage	12DC
Operating Voltage	8 ~ 15VDC
Max.Rated Current	300mA/12VDC
Rated Falsh	1-2HZ
Installation	Magnet
Operating Life	500Hours at 12VDC
Operating Temp	-20 ~ +60
Weight	210±10g


\* Value applying at rated voltage

**KP-114 STROBE & BEACON**


**DIMENSIONS**



Acrylic Lens  
Black ABS Black  
Amber, Blue or Yellow available

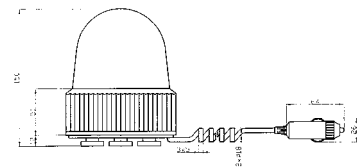

Side View



Top View

all dimensions are in mm

<b>Model No</b>	<b>KP-114</b>
Rated Voltage	12DC
Operating Voltage	8 ~ 15VDC
Installation	Magnet
Operating Life	500Hours at 12VDC
Operating Temp	-20 ~ +60
Weight	465±20g

\* Value applying at rated voltage

The information contained herein is believed to be correct, but no guarantee for accuracy, completeness KEPO Electronics Ltd. reserves the right to make changes without notification.