


1 2 3 4 5 6 7 8

SPECIFICATION

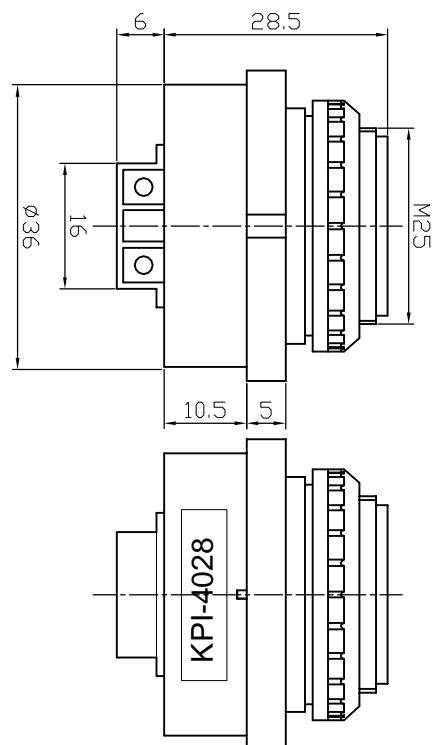

- 1.Rated Voltage 24VDC
- 2.Operating Voltage 15~48VDC
- 3.Max.Rated Current 1mA/24VDC
- 4.Resonant Frequency 2.7±0.5KHz
- 5.Min.Sound Pressure Level..... 76dB at 24VDC/100cm
- 6.Tone Nature Pulse
- 7.Shell Material PC
- 8.Operating Temperature -20~+70°C
- 9.Store Temperature -30~+80°C
- 10.Weight 25g

Red(赤) Positive(+)
Black(黒) Negative(-)

ULJ1007/AWG18#
Red

ULJ1007/AWG18#
Black

230±10

E

F

D E

C

B

A

1 2 3 4 5 6 7 8

		KPEO <small>NINGBO KPEO ELECTRONIC CO.,LTD</small>	
		http://www.chinaacoustic.com	
No.	DESCRIPTION	APPROVALS	DATE
	VOLATANTENUNGEN VORBEREITUNGEN XX = XXX = 90 ANGLES 1° NO ANGLES 1° BEST ANGLE PROJECTION	DRAWN CHECKED	
		UNIT mm	DRAW NO. OEMI1049
		SCALE NOT TO SCALE	SHLF VER 1.0

Piezo Buzzer QUARTZ-1 LTD
KPI-4028L-1049

F