
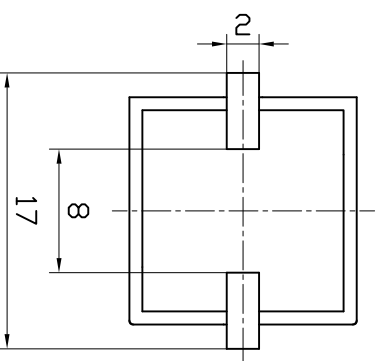
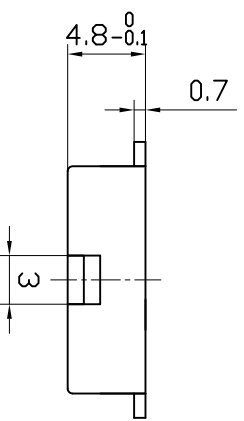


受 控

SPECIFICATION

1. Rated Voltage 12V-p-p Square Wave
2. Max. Allowable Voltage 30V-p-p Square Wave
3. Max. Rated Current 2mA at 4.0KHz/12V-p-p Square Wave
4. Min. Sound Pressure Level..... 85dB at 4.0KHz/12V-p-p Square Wave/10cm
5. Capacitance at 100Hz 6500pF±30%
6. Resonant Frequency 4.0±0.5KHz
7. Shell Material/Color..... PPS/Black
8. Operating Temperature -20~+80°C
9. Store Temperature -30~+100°C
10. Weight 1g

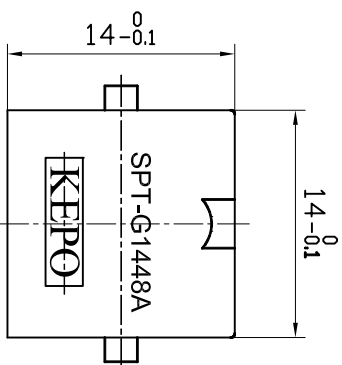

Compliance with ROHS

KEPO
NINGBO KEPO ELECTRONIC CO.,LTD
<http://www.chinaacoustic.com>

Piezo transducer Quartz-1
SPT-G1448A-7204

No.	DESCRIPTION	APPROVED	DATE		
<small>FOR OVERSEAS USES X XX # 90° ANGLES ±2° FIRST ANGLE PROJECTION</small>		DRAWN	APPROVALS	DATE	
		CHECKED			
		APPROVED	梁樹榮	10.10.11	
		SCALE	NOT TO SCALE	SHEET	VER
	UNIT mm	DWG NO.	OEM7204R	1.0	