




SPECIFICATION

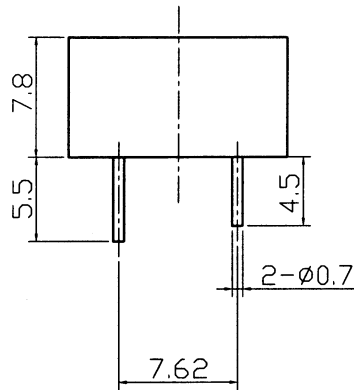

- 1.Rated Voltage12VDC
- 2.Operating Voltage1.5~16VDC
- 3.Max.Rated Current8mA at 12VDC
- 4.Resonant Frequency4.0±0.5KHz
- 5.Min.Sound Pressure Level.....85dB at 12VDC/10cm
- 6.Tone NatureContinuous
- 7.Case MaterialPBT
- 8.Operating Temperature-20~+70℃
- 9.Store Temperature-30~+80℃
- 10.Weight2g

				KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
No.		DESCRIPTION	APPROVED	DATE	Piezo Buzzer QUARTZ-1 LTD CBG1440BP-2992
TOLERANCES UNLESS NOTED OTHERWISE X .5 XX .25 XXX .125 90° FORMED +1° ANGLES -1°		APPROVALS	DATE		
FIRST ANGLE PROJECTION		DRAWN 储统立	CHECKED 储统立	APPROVED 储统立	UNIT mm DWG NO. OEM2992
		08.06.30		SCALE	SHEET 1.1