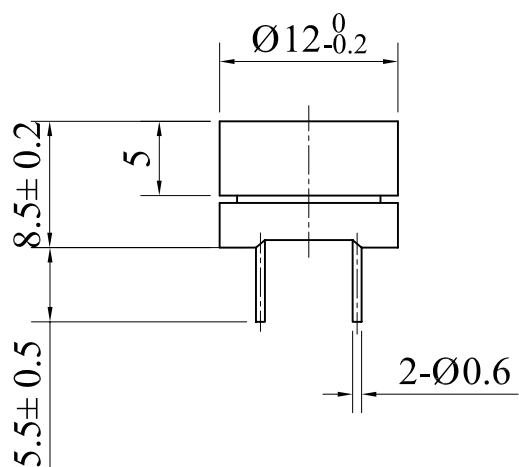



SPECIFICATION

1. Rated Voltage 1.5 V
2. Operating Voltage 1~2V
3. Max. Rated Current 30mA
4. Coil Resistance $16 \pm 4 \Omega$
5. Coil Impedance 40Ω
6. Min. Sound Pressure Level 85dB/10cm
7. Resonant Frequency 2048Hz
8. Case Material NORYL
9. Operating Temperature $-20 \sim +70^{\circ}\text{C}$
10. Store Temperature $-30 \sim +80^{\circ}\text{C}$
11. Weight 2g

				KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com			
				Magnetic Buzzer KP12-185A			
No.	DESCRIPTION	APPROVED	DATE				
TOLERANCES UNLESS NOTED OTHERWISE X ± .XX ± .XXX ± 90° FORMED ±2° ANGLES -1° FIRST ANGLE PROJECTION		APPROVALS		DATE			
		DRAWN			UNIT	DWG NO.	
		CHECKED			mm	KP3.840.654	
		APPROVED		04.11.04	SCALE	NOT TO SCALE	SHEET VER 1.2