

Product: MICRO SPEAKER


Application: MOBILE PHONE



Model No

KP1536ST4

Impedence	8Ω+/-15% (at 1Vrms, 1kHz)
Min.Sound Pressure Level	87dB+/-3dB(0.1W/0.1M at 1kHz)
Resonance Frequency	900Hz+/-20%
Frequency Range	F0~20kHz
Input Power	Rated 0.8W /Max. 1.0W
Distortion	<10% Max. at 2kHz/2Vrms
Buzz and Rattle	Should not be audible buzzes, rattles when the 2.53V sine wave signal swept at frequency range.
Polarity	When supplied plus D.C. voltage to (+) terminal, the cone diaphragm must move to forward.
Out-Diameter	φ15mm
Height	3.6mm
Weight	1.0gr

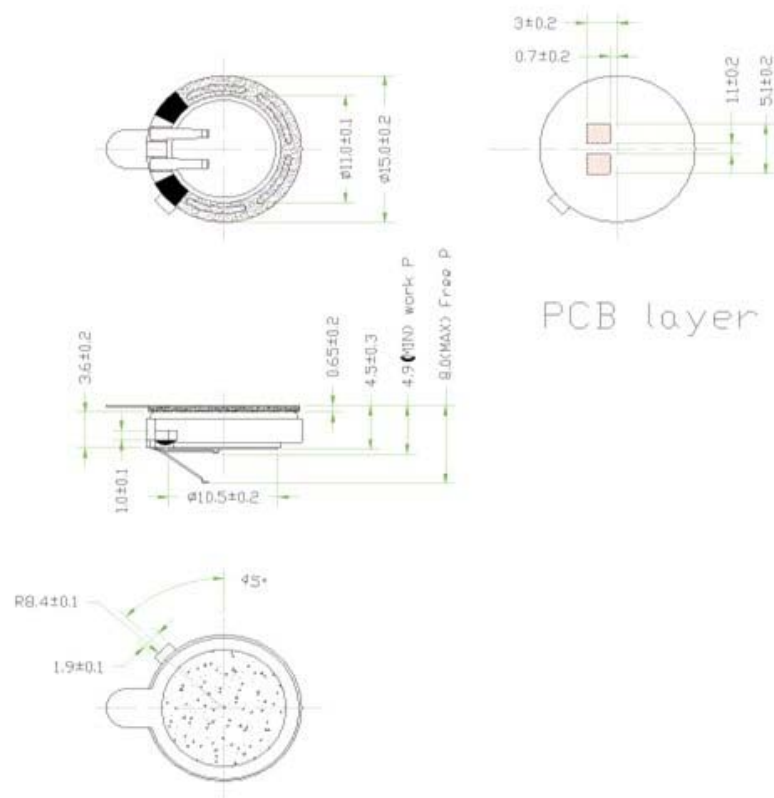

www.chinaacoustic.com ;E-MAIL : sales@chinaacoustic.com