


1 2 3 4 5 6 7 8


SPECIFICATION

A

B

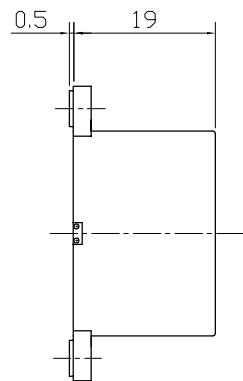

C

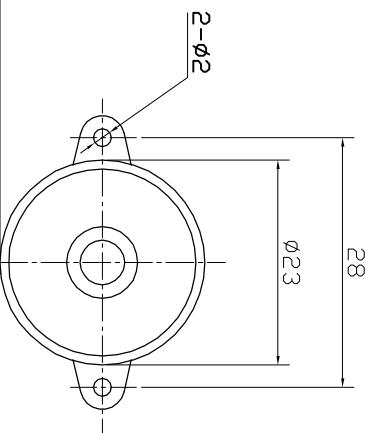


- 1.Rated Voltage12VDC
- 2.Operating Voltage8~15VDC
- 3.Max.Rated Current15mA at 12VDC
- 4.Resonant Frequency3.3±0.5KHz
- 5.Min.Sound Pressure Level.....88dB at 12VDC/30cm
- 6.Tone NatureContinuous
- 7.Case MaterialPBT
- 8.Operating Temperature-20~+80°C
- 9.Store Temperature-30~+100°C
- 10.Weight8g

Red(+)Positive(+)
Black(黒)Negative(-)

D

E

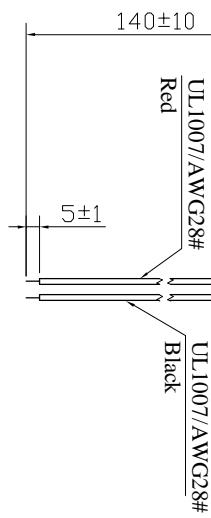

E

F

KEPo NINGBO KEPo ELECTRONIC CO.,LTD
<http://www.chinaacoustic.com>

Piezo Buzzer

KP-231L

F

No.	DESCRIPTION	APPROVALS	DATE
	TOLERANCES UNLESS STATED OTHERWISE XX = ± XXX = ± NOTES: 1/2"	DRAWN CHECKED	
	ANGLE PROJECTION		
1			
2			
3			
4			
5			
6			
7			
8			

UNIT	DRAW NO.	REV.
mm	KP3.840.075	1.1

G