
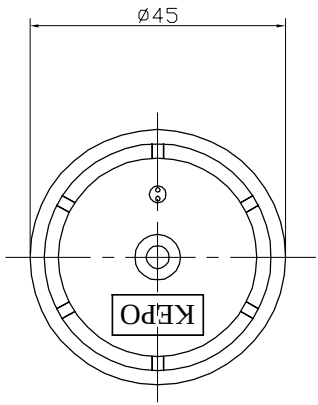


SPECIFICATION

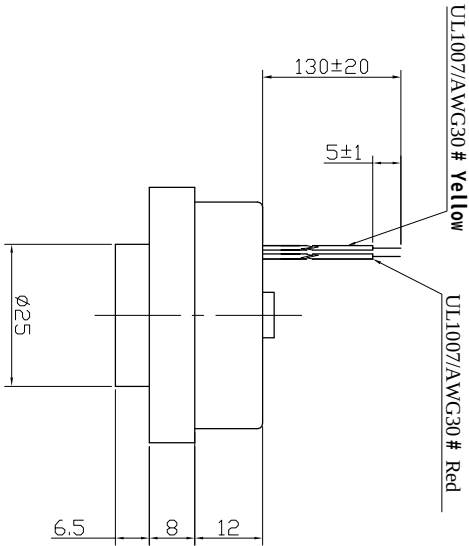

- 1. Rated Voltage12VDC.
 - 2. Operating Voltage3~16VDC.
 - 3. Max. Rated Current20mA at 12VDC
 - 4. Min. Sound Pressure Level.....92dB at 12VDC/30cm
 - 5. Tone NatureFast Pulse
 - 6. Resonant Frequency3.2±0.5KHz.
 - 7. Shell Material/Color.....ABS/White
 - 8. Operating Temperature-20~+60℃.
 - 9. Store Temperature-30~+70℃.
 - 10. Weight21g.
- Red(红).....Positive(+)
Yellow(黄).....Negative(-)

				KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com			
No.	DESCRIPTION	APPROVED	DATE				
TOLERANCES UNLESS NOTED OTHERWISE: XX ± XXX ± 90° ANGLES ±°							
FIRST ANGLE PROJECTION							
							
				UNIT			
				mm			
				DWG NO.			