

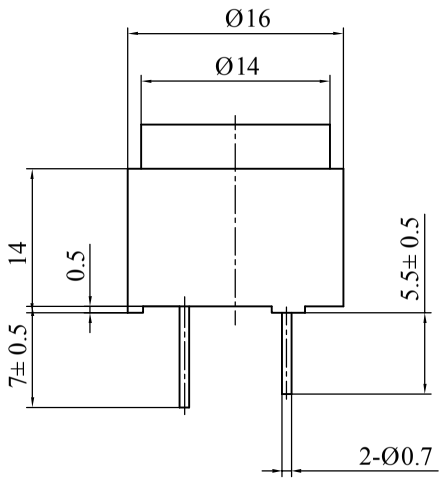

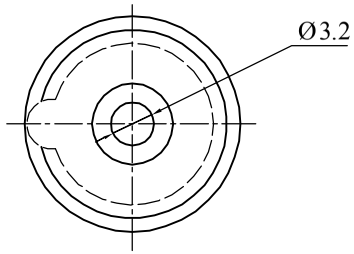

SPECIFICATION

1.Rated Voltage .....1.5 V
2.Operating Voltage .....1~2 V
3.Max.Rated Current 15mA
4.Coil Resistance ..... 27±3 Ω
5.Coil Impedance ..... 80 Ω
6.Min.Sound Pressure Level 80dB/10cm
7.Resonant Frequency 2048Hz
8.Case Material ..... MPPO
9.Operating Temperature ..... -20～+70℃
10.Store Temperature ..... -30～+80℃
11.Weight 7g

No.	DESCRIPTION	APPROVED	DATE

TOLERANCES UNLESS NOTED OTHERWISE
X ±
.XX ±
.XXX ±
90° FORMED +2 °
ANGLES -1 °

FIRST ANGLE PROJECTION

APPROVALS	DATE
DRAWN	
CHECKED	
APPROVED	02.12.25

KEPO NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD
http://www.chinaacoustic.com

Magnetic Buzzer
KPM-1601A

UNIT mm | DWG NO. KP3.840.684
SCALE NOT TO SCALE | SHEET | VER 1.0