
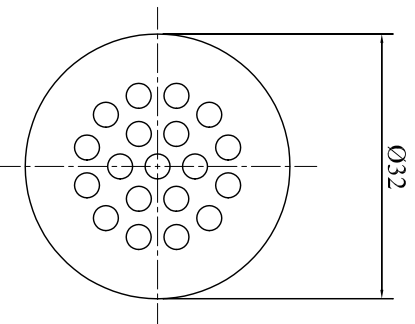


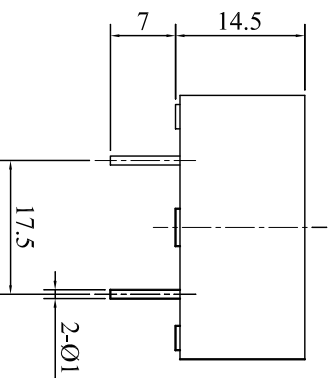

SPECIFICATION

- 1.Rated Noise Power0.15W
- 2.Max.Input Power0.3W
- 3.Rated Frequency Range700~50000Hz
- 4.Rated Frequency1200±200Hz
- 5.Rated Impedance.....8 Ω
- 6.Min.Sound Pressure Level.....83dB at 1.2KHz 1.1Vrms Sine Wave/10cm
- 7.Case MaterialABS
- 8.Operating Temperature-20~+60℃
- 9.Weight8g

No.	DESCRIPTION	APPROVED		DATE		<i>KEPO</i> NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD http://www.chinaacoustic.com Magnetic Buzzer KPMB-3208			
TOLERANCES, UNLESS NOTED OTHERWISE:		APPROVALS		DATE					
XXX ±		DRAWN							
90° ANGLES ±1°		CHECKED							
FIRST ANGLE PROJECTION		APPROVED		03.01.15					
						UNIT	DWG NO.		
						mm			KP3.840.646
						SCALE			SHEET
									YEAR 1.0