


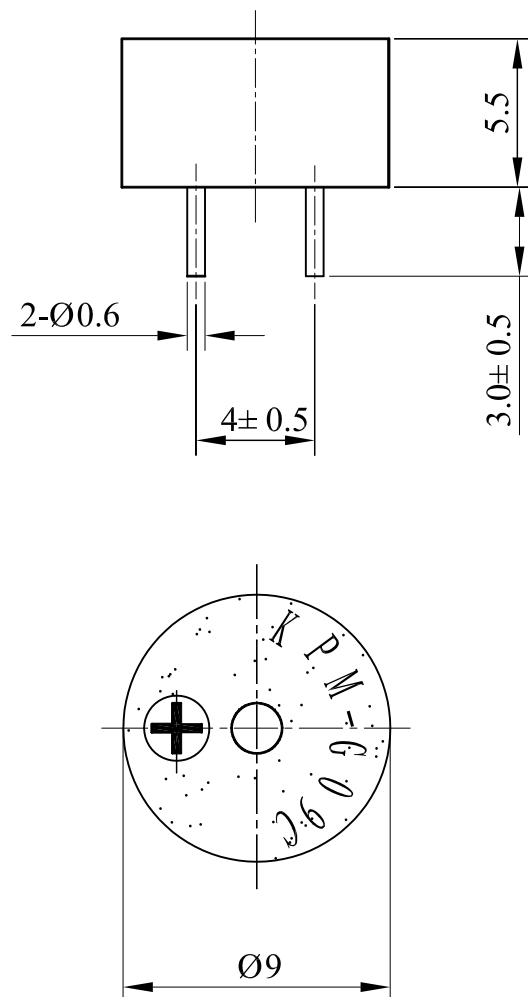

SPECIFICATION

1. Rated Voltage 3 V
2. Operating Voltage 2~6 V
3. Max. Rated Current 60 mA
4. Coil Resistance 25 ± 4 Ω
5. Coil Impedance 45 Ω
6. Min. Sound Pressure Level 85dB/10cm
7. Resonant Frequency 2731Hz
8. Shell Material/Color PBT/Black
9. Operating Temperature -20~+70℃
10. Store Temperature -30~+80℃
11. Weight 1g

				Compliance with RoHS			
				KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com			
				Magnetic Buzzer KPMG09C1			
No.	DESCRIPTION	APPROVED	DATE				
TOLERANCES UNLESS NOTED OTHERWISE X ± XX ± XXX ± 90° FORMED ±2° ANGLES -1° FIRST ANGLE PROJECTION 		APPROVALS		DATE			
		DRAWN WMX		07.06.26		UNIT mm	
		CHECKED LXB		07.06.26		DWG NO. KP3.840.697R	
		APPROVED WDY	07.06.26	SCALE NOT TO SCALE		SHEET	VER 1.4