
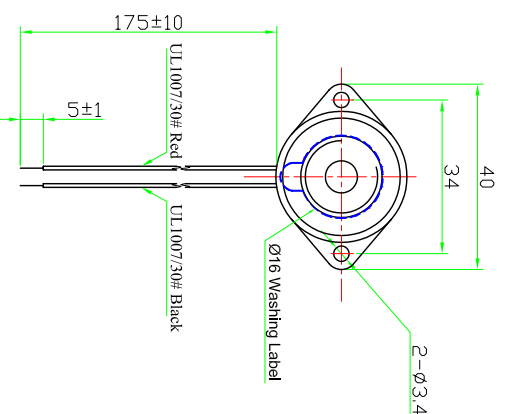



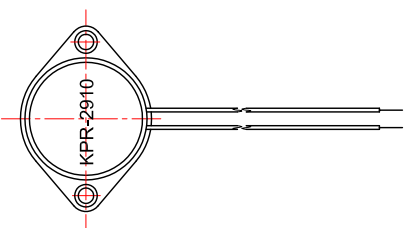

Specifications

1. Rated Voltage..... 12Vp-p Square Wave
2. Max. Allowable Voltage..... 30Vp-p Square Wave
3. Max. Rated Current..... 3mA at 2.9KHz/12Vp-p Square Wave
4. Min. Sound Pressure Level..... 90dB at 2.9KHz/12Vp-p Square Wave/30cm
5. Resonant Frequency..... 2.9±0.5KHz
6. Capacitance at 120Hz..... 3000pF±30%
7. Case Material..... ABS
8. Operating Temperature..... -20~+60°C
9. Store Temperature..... -30~+70°C
10. Weight..... 10.2g
