


Speaker Specification

Customer's Model No.			Customer	QUARTZ-1		
Kepo Model No.		KPSP4048MN-50/0.5F		Size	Φ 40mm	No. KF3.002.351(J19213)
No.	Item	Specification		Test Condition		
1	Impedance	50Ω± 15%		at 1.0kHz		
2	Resonant Fr. (f _o)	500Hz± 20%				
3	Frequency Range	F0-7.0KHz				
4	Rated Power	0.5W				
5	Max Power	0.6W				
6	S.P.L.	91± 3dB		0.5W / 0.5M at 1.0k		
7	Distortion	Max 5%		at rated power 1.0kHz		
8	Sweep Test	must be normal		at sine wave 5.0 V		
9	Load Test	after test meet item 8		rated noise power, 24 Hrs.		
10	Heat Test	after test meet item 8		50± 2℃ 5Hrs.		
11	Cold Test	after test meet item 8		-20± 2℃ 5Hrs.		
12	Humidity Test	after test meet item 8		40± 2℃ ,90/95%R.H. 5Hrs.		
13	Weight					
14	Polarity Test	When supplied plus D.C. voltage to (+) terminal, the cone must move to forward.				
15	Note					

Dimensions:

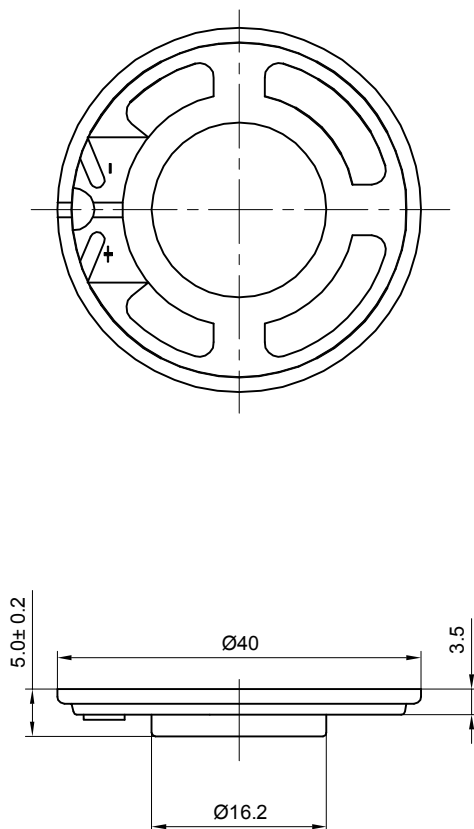

FIRST ANGLE PROJECTION

UNIT : mm
Tolerance : ± 0.2