

Speaker Specification



Customer's Model No.			Customer			
Kepo Model No.		KPSP57170MF-08/0.25G		Size	φ57mm	No. J19218
No.	Item	Specification		Test Condition		
1	Impedance	8Ω± 15%		at 800Hz		
2	Resonant Fr. (f _o)	400Hz± 20%				
3	Frequency Range	F0-8.0KHz				
4	Rated Power	0.25W				
5	Max Power	0.5W				
6	S.P.L.	94± 3dB		0.1W / 0.1M at AVG0.8,1.0,1.2,1.5 KHz		
7	Distortion	Max 5%		at rated power 1.0kHz		
8	Sweep Test	must be normal		at sine wave 1.4V		
9	Load Test	after test meet item 8		rated noise power, 24 Hrs.		
10	Heat Test	after test meet item 8		50± 2 ℃ 5Hrs.		
11	Cold Test	after test meet item 8		-20± 2 ℃ 5Hrs.		
12	Humidity Test	after test meet item 8		40± 2 ℃,90/95%R.H. 5Hrs.		
13	Weight					
14	Polarity Test	When supplied plus D.C. voltage to (+) terminal, the cone must move to forward.				
15	Note					



Ningbo Kepo Electronics Co.,Ltd.

<http://www.chinaacoustic.com>

Dimensions:

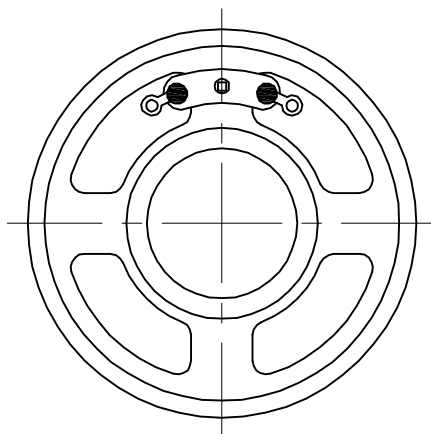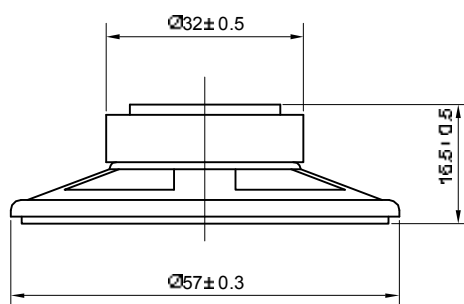

FIRST ANGLE PROJECTION

UNIT : mm
Tolerance : ± 0.2