
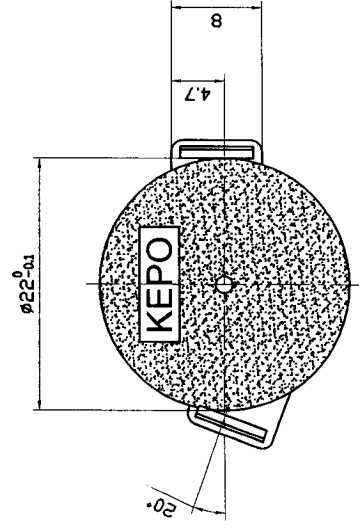
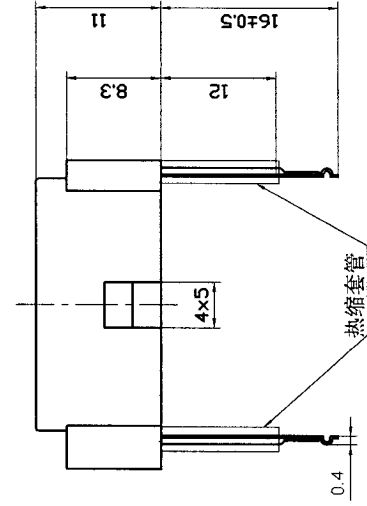
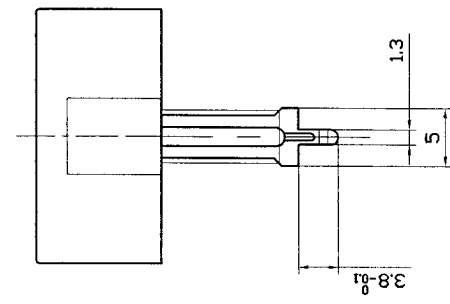


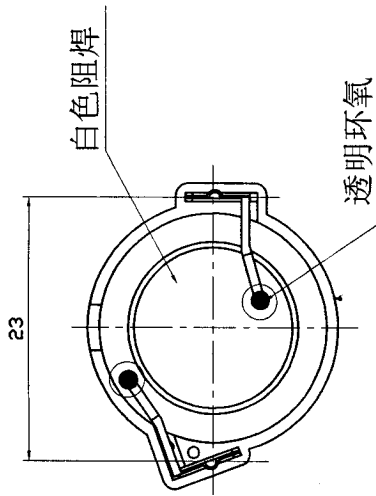

SPECIFICATION

1. Rated Voltage.....5Vp-p Square Wave
2. Max. Input Voltage.....30Vp-p Square Wave
3. Min. Sound Pressure Level.....70dB at /2.0KHz/5Vp-p Square Wave/10cm
4. Capacitance at 100Hz 30000 ±30%pF
5. Resonant Frequency.....2.0±0.5KHz
6. Shell Material/Color.....PA/BLACK
7. Operating Temperature.....-20~+70℃
8. Store Temperature.....-30~+80℃
9. Weight.....3g

No.		DESCRIPTION		APPROVED	DATE
TOLERANCES UNLESS NOTED OTHERWISE		APPROVALS		DATE	
XX	+	DRAWN			
XX	+	CHECKED			
XX	+	APPROVED			
FIRST ANGLE PROJECTION		UNIT		SCALE	NOT TO SCALE
FIRST ANGLE PROJECTION		mm		05.12.21	VER 1.1
KEPO		NINGBO KEPO ELECTRONIC CO. LTD		http://www.chinaacoustic.com	
Piezo Transducer		KPT-2223P12		OEM1217	
SHIBET		7		8	