SPECIFICATION

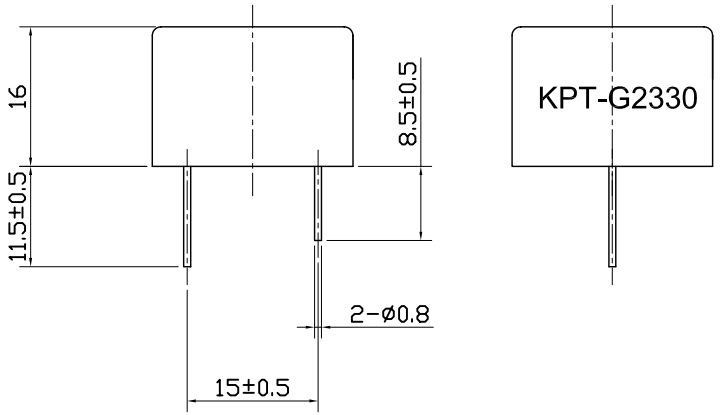

1.Rated Voltage .....12Vp-p Square Wave
2.Operating Voltage .....30Vp-p Square Wave
3.Max.Rated Current .....4mA at 3.3KHz/12Vp-p Square Wave
4.Resonant Frequency .....3.3±0.5KHz
5.Min.Sound Pressure Level.....85dB at 3.3KHz/12Vp-p Square Wave /30cm
6.Case Material .....ABS
7.Capacitance at 120Hz.....15000pF±30%
8.Operating Temperature .....-20～+60℃
9.Store Temperature .....-30～+70℃
10.Weight 4.5g

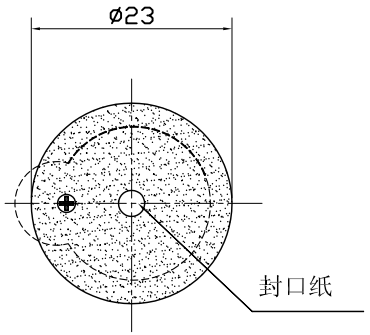

Compliance with ROHS

KEPO NINGBO KEPO ELECTRONIC CO.,LTD
http://www.chinaacoustic.com

Piezo Transducer QUARTZ-1
KPT-G2330-3193

No.	DESCRIPTION	APPROVED	DATE

TOLERANCES UNLESS NOTED OTHERWISE
.X ±
.XX ±
.XXX ±
90° FORMED ±2°
ANGLES ±1°

FIRST ANGLE PROJECTION

APPROVALS	DATE
DRAWN	
CHECKED	
APPROVED	08.09.26

UNIT mm | DWG NO. OEM3193R
SCALE NOT TO SCALE | SHEET | VER 1.0