

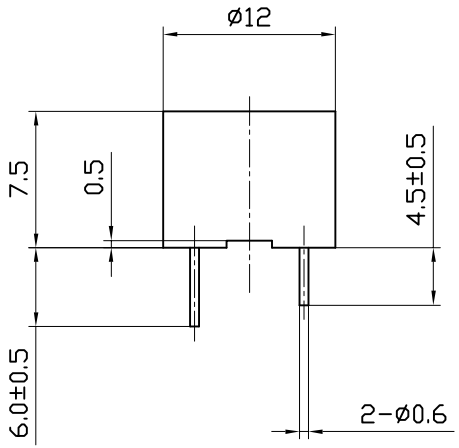





SPECIFICATION

1.Rated Voltage 5VDC
2.Operating Voltage ..... 4~8VDC
3.Max.Rated Current 30mA/5VDC
4.Min.Sound Pressure Level 85dB/10cm
5.Resonant Frequency ..... 2300±500Hz
6.Response Time 50ms
7.Case Material ..... PBT
8.Operating Temperature ..... -20~+70℃
9.Store Temperature ..... -30~+80℃
10.Weight 2g

No.	DESCRIPTION	APPROVED	DATE

TOLERANCES UNLESS NOTED OTHERWISE
.X ±
.XX ±
.XXX ±
90° FORMED +2.° ANGLES -1.°
FIRST ANGLE PROJECTION

APPROVALS	DATE
DRAWN	
CHECKED	
APPROVED	05.01.07

KEPO NINGBO KEPO ELECTRONIC CO.,LTD
http://www.chinaacoustic.com

Magnetic Buzzer
KPX-1205UB

UNIT	DWG NO.	
mm	KP3.840.694	
SCALE	SHEET	VER
NOT TO SCALE		1.2