



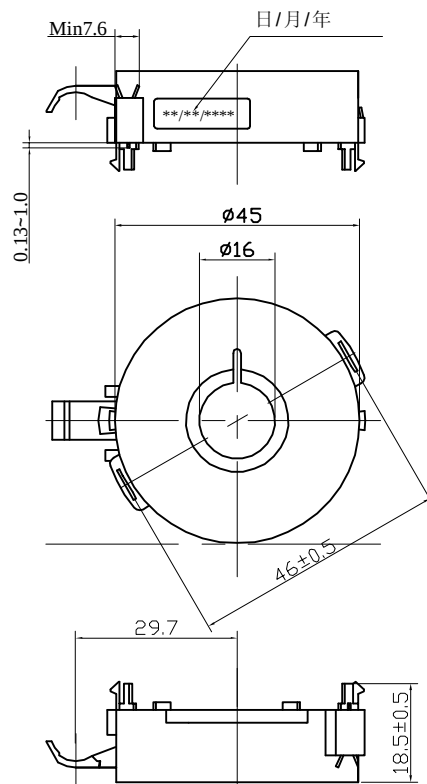

SPECIFICATION

1. Rated Voltage4.2Vrms(12Vp-p) Sine Wave
2. Max. Rated Input Voltage60Vp-p Square Wave
3. Min. Sound Pressure Level104±3dB at 4.2Vrms(12Vp-p)
Sine Wave/1-5KHz/30cm
4. Rated Frequency Range1-5KHz
5. Max. Capacitance at 100Hz170±30% nF
6. Shell Material/ColorPC/Grey
7. Cone Material.....PVC
8. Operating Temperature-40~+60℃
9. Store Temperature-40~+60℃
10. Weight9g
11. Terminal Pull-Out Force.....Min 7Lbs
12. Wire Pull-Out Force.....Min 1Lb
13. Disc To Cone Pull-Out Force.....Min 2.2Lbs
14. Glue Bubble Quantity/size.....Max 2/Ø2.5

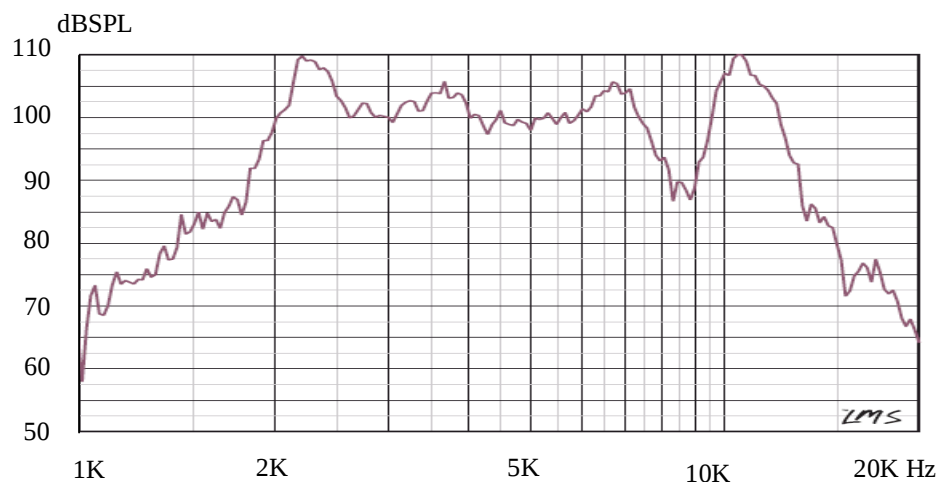

				KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com			
				Ultra Sonic Transducer System Sensor			
				PCT-450CSM			
No.	DESCRIPTION	APPROVED	DATE				
TOLERANCES UNLESS NOTED OTHERWISE: XX ±.A XXX ±.A 90, 3 FORMED ±.2, 3 ANGLES -1, 2		APPROVALS		DATE			
FIRST ANGLE PROJECTION		DRAWN			UNIT	DWG NO.	
		CHECKED			mm	OEM1954	
		APPROVED			SCALE	NOT TO SCALE	SHEET
				07.05.18	VER 1.1		