
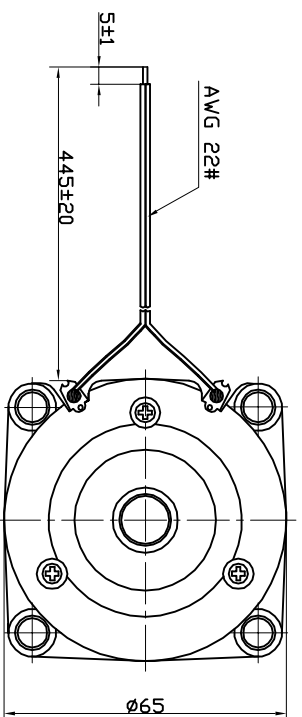


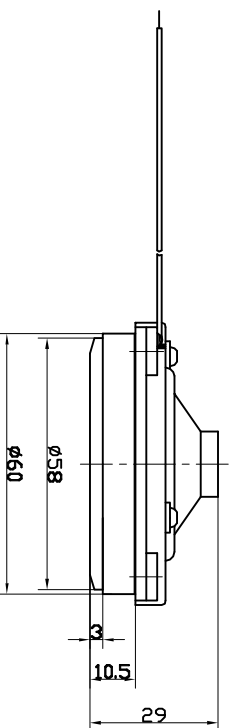

Specification

(Test Condition, 25 °C)

- | | |
|---------------------------------------|----------------------------|
| 1. Housing Material/ Color..... | ABS/Black |
| 2. Voice Coil Impedance | 4 Ohm (at 1 KHz) |
| 3. Voice Coil Dimension | Ø 25.4 mm(Dia.) |
| 4. Magnet Size | Ø60*32*7 mm(Dia.* dia.*H) |
| 5. Power Rating RMS | 15 W |
| 6. Power Rating Peak | 20W |
| 7. S.P.L. | Min.95 dB(at 1 meter/1W) |
| 8. Resonant Frequency | 2KHz±10% |
| 9. Rated Frequency Range..... | 500~8500Hz |
| 10. Load Test | 8 Hours (at 15w) |
| 11. Heat Test | 8 Hours (at 85℃) |
| 12. Operating Temperature range | -20 ~ +60℃ |
| 13.Store Temperature..... | -20 ~ +70℃ |
| 14. Wires Connection | Black、White(Non-polarized) |
| 15.Weight | 240 ±10g |

				KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com			
				Electronic Siren S-90D-4			
No.	DESCRIPTION	APPROVED	DATE				
NOTED OTHERMENS							
X 1 A		APPROVALS DATE					
XXX 1 A							
90, 4, 0, 0, 2, 1							
FIRST ANGLE PROJECTION		CHECKED	DATE				
APPROVED		UNIT: mm DWG NO: KP4,840,450 SCALE: NOT TO SCALE SHEET: 1.0					