
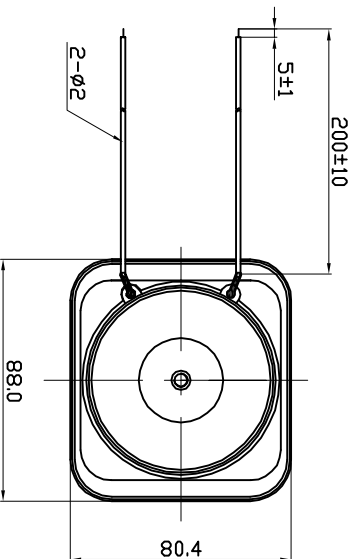
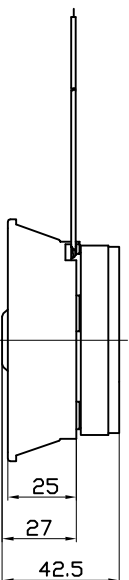


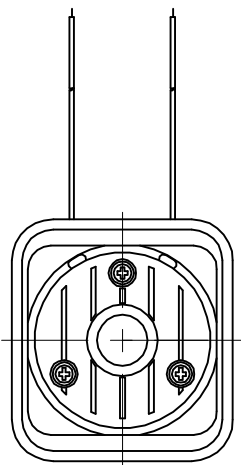

Specification

(Test Condition, 25℃)

1. Housing Material/ Color..... ABS/Black
2. Voice Coil Impedance 8 Ohm (at 1 KHz)
3. Voice Coil Dimension $\varnothing 25.4$ mm(Dia.)
4. Magnet Size $\varnothing 70*32*10$ mm(Dia. * dia. *H)
5. Power Rating RMS 15 W
6. Power Rating Peak 20W
7. S.P.L. Min.105 dB(at 1 meter/1W)
8. Resonant Frequency 2KHz $\pm 10\%$
9. Rated Frequency Range 500~ 8500Hz
10. Load Test 8 Hours (at 15w)
11. Heat Test 8 Hours (at 60℃)
12. Operating Temperature range -20 ~ +60℃
13. Store Temperature..... -20 ~ +70℃
14. Wires Connection $\varnothing 0.2 \times 16$ 2-black(Non-polarized)
15. Weight 430 ± 10 g

No.	DESCRIPTION	APPROVED	DATE	KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com					
TOLERANCES UNLESS NOTED OTHERWISE		APPROVALS	DATE	Electronic horn					
XX ±	DRAWN			SH-8088					
XX ±	CHECKED			UNIT	DWG. NO.				
90° FORMER ±2°				mm	KP4.840.447				
XXX ±									
FIRST ANGLE PROJECTION									
	APPROVED		05.09.12	SCALE	NOT TO SCALE	SHEET	VER. 1.0		