

规格书编号

SPEC NO :

# 产品规格书

## SPECIFICATION

CUSTOMER 客 户 : \_\_\_\_\_

PRODUCT 产 品 : \_\_\_\_\_ SAW FILTER

MODEL NO 型 号 : \_\_\_\_\_ HDF369A F11

PREPARED 编 制 : \_\_\_\_\_ CHECKED 审 核 : \_\_\_\_\_

APPROVED 批 准 : \_\_\_\_\_ D A T E 日 期 : \_\_\_\_\_ 2006-5-11

|                         |             |         |
|-------------------------|-------------|---------|
| 客户确认 CUSTOMER RECEIVED: |             |         |
| 审核 CHECKED              | 批准 APPROVED | 日期 DATE |
|                         |             |         |

无锡市好达电子有限公司  
Shoulder Electronics Limited



## 更改历史记录

## History Record

[illegible]

## 1. SCOPE


This specification shall cover the characteristics of SAW filter With F369A used for the page system.

## 2. ELECTRICAL SPECIFICATION

|                       |                |
|-----------------------|----------------|
| DC Voltage VDC        | 10V            |
| AC Voltage Vpp        | 10V50Hz/60Hz   |
| Operation temperature | -20°C to +60°C |
| Storage temperature   | -45°C to +85°C |
| RF Power Dissipation  | 0dBm           |

Electronic Characteristics


### 2-1. Typical frequency response

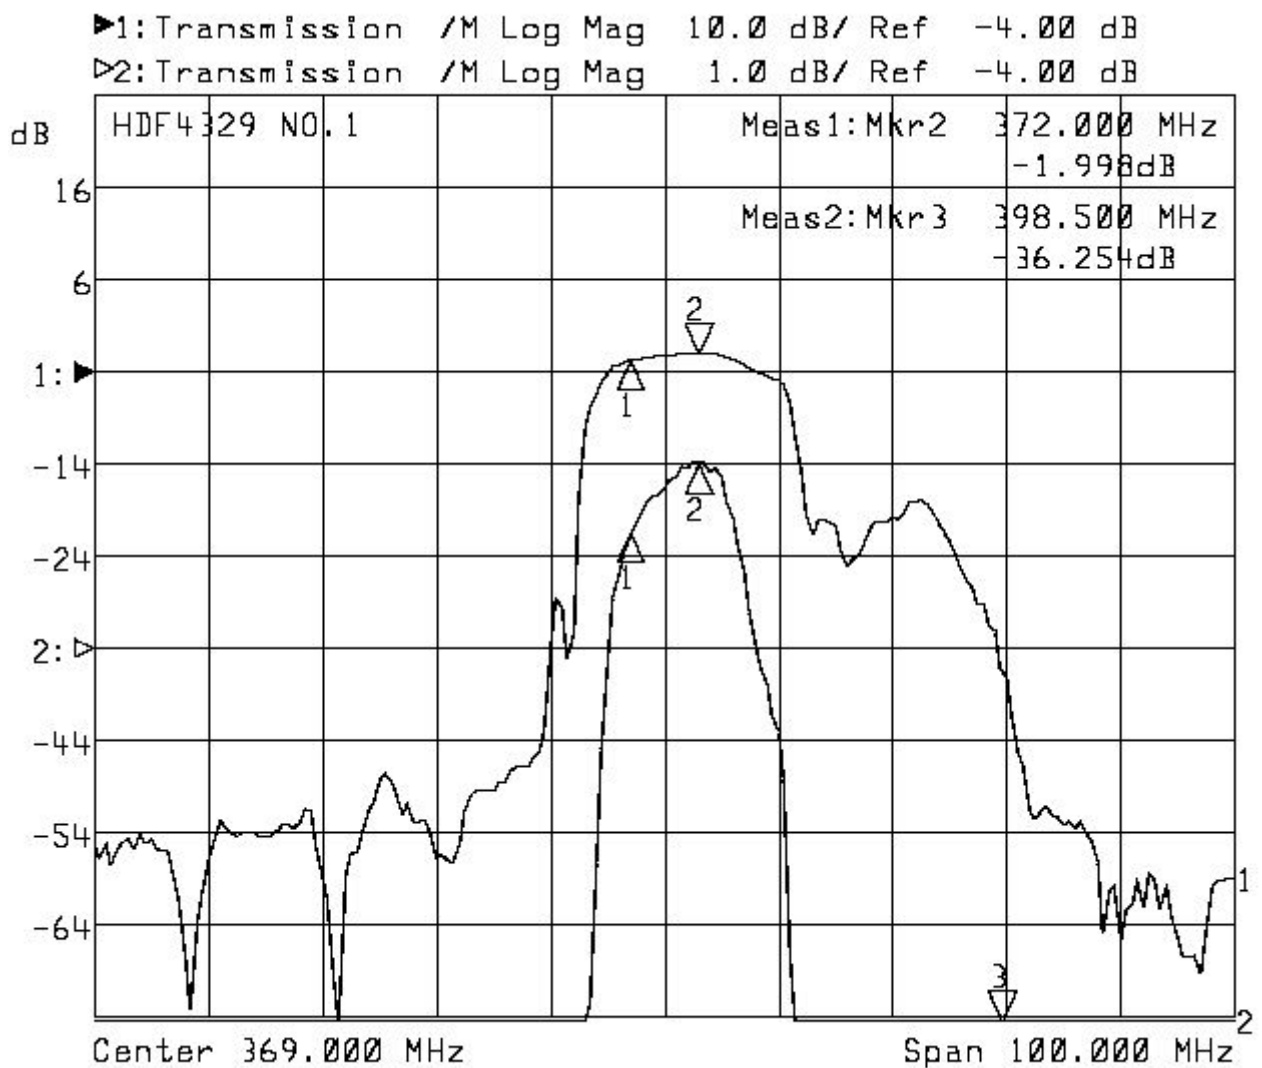


## 2-2. Electrical characteristics

| Part number                 | Minimum | Typical | Maximum | Unit         |
|-----------------------------|---------|---------|---------|--------------|
| center frequency (Fo)       |         | 369     |         | MHz          |
| Insertion Loss              |         |         |         |              |
| 1、Fo-45.8MHz~ Fo-39.8MHz    | 50      |         | 4.0     | dB           |
| 2、Fo±2.0 MHz                | 45      |         |         |              |
| 3、Fo+39.8 MHz ~ Fo+45.8 MHz |         |         |         |              |
| Passband Variation          |         | 0.5     | 1       | dB           |
| Input/Output Impedance      |         | 50//0   |         | $\Omega$ /pF |
| Operation Temperature       | -40     |         | 85      | °C           |

## 3. TEST CIRCUIT

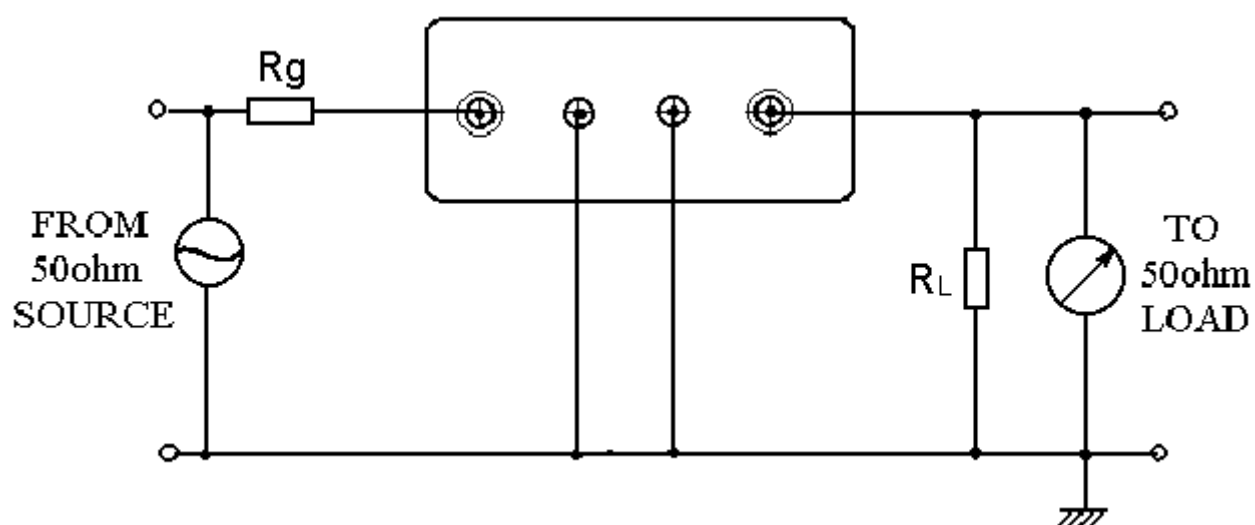

## 4. DIMENSION

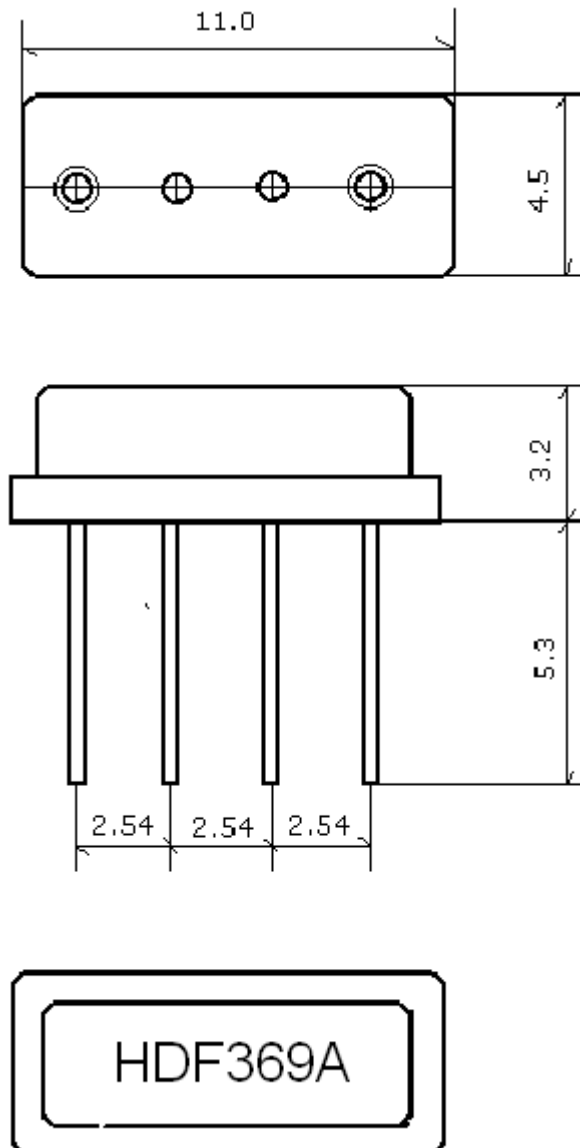

## 5. ENVIRONMENTAL CHARACTERISTICS

### 5-1 High temperature exposure

Subject the device to +85°C for 16 hours. Then release the filter into the room conditions for 24 hours prior to the measurement. It shall fulfill the specifications in table 1.

### 5-2 Low temperature exposure

Subject the device to -20°C for 16 hours. Then release the device into the room conditions for 24 hours prior to the measurement. It shall fulfill the specifications in table 1.

### 5-3 Temperature cycling

Subject the device to a low temperature of  $-40^{\circ}\text{C}$  for 30 minutes. Following by a high temperature of  $+80^{\circ}\text{C}$  for 30 Minutes. Then release the device into the room conditions for 24 hours prior to the measurement. It shall meet the specifications in table 1.

#### 5-4 Resistance to solder heat

Dip the device terminals no closer than 1.5mm into the solder bath at  $260^{\circ}\text{C} \pm 10^{\circ}\text{C}$  for  $10 \pm 1$  sec. Then release the device into the room conditions for 4 hours. The device shall meet the specifications in table 1.

#### 5-5 Solderability

Subject the device terminals into the solder bath at  $245^{\circ}\text{C} \pm 5^{\circ}\text{C}$  for 5s, More than 95% area of the terminals must be covered with new solder. It shall meet the specifications in table 1.

#### 5-6 Mechanical shock

Drop the device randomly onto the concrete floor from the height of 1m 3 times. the device shall fulfill the specifications in table 1.

#### 5-7 Vibration

Subject the device to the vibration for 1 hour each in x,y and z axes with the amplitude of 1.5 mm at 10 to 55 Hz. The device shall fulfill the specifications in table 1.

#### 5-8 Lead fatigue

##### 5-8-1 Pulling test

Weight along with the direction of lead without an shock 1kg. The device shall satisfy all the initial Characteristics.

##### 5-8-2 Bending test

Lead shall be subject to withstand against  $90^{\circ}\text{C}$  bending with 450g weight in the direction of thickness. This operation shall be done toward both direction. The device shall show no evidence of damage and shall satisfy all the initial electrical characteristics.

## 6. REMARK

#### 6.1 Static voltage

Static voltage between signal load & ground may cause deterioration & destruction of the component. Please avoid static voltage.

#### 6.2 Ultrasonic cleaning

Ultrasonic vibration may cause deterioration & destruction of the component. Please avoid ultrasonic cleaning

#### 6.3 Soldering

Only leads of component may be soldered. Please avoid soldering another part of component.

## 7. Packing

### 7.1 Dimensions


- (1) Carrier Tape: Figure 1
- (2) Reel: Figure 2
- (3) The product shall be packed properly not to be damaged during transportation and storage.

### 7.2 Reeling Quantity

1000 pcs/reel 7"  
3000 pcs/reel 13"

### 7.3 Taping Structure

- (1) The tape shall be wound around the reel in the direction shown below.

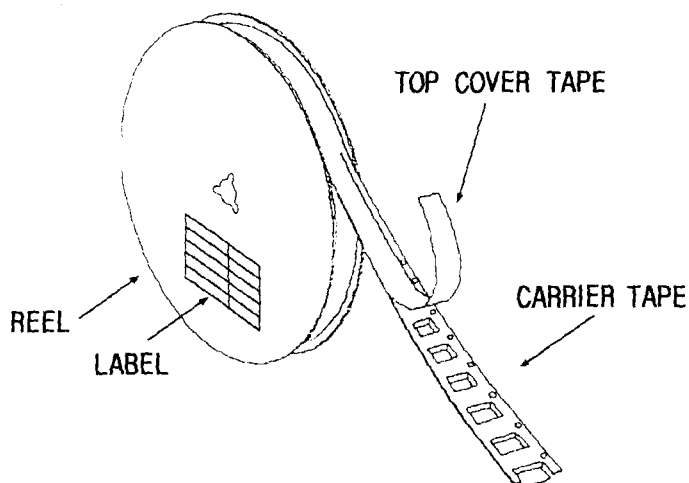


- (2) Label

|                   |  |
|-------------------|--|
| Device Name       |  |
| User Product Name |  |
| Quantity          |  |
| Lot No.           |  |

- (3) Leader part and vacant position specifications.



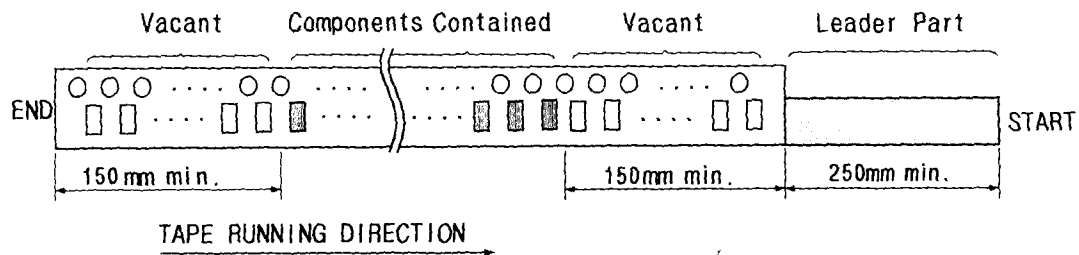


## 8. TAPE SPECIFICATIONS


8.1 Tensile Strength of Carrier Tape: 4.4N/mm width

8.2 Top Cover Tape Adhesion (See the below figure)

- (1) pull off angle:  $0 \sim 15^\circ$
- (2) speed: 300mm/min.
- (3) force: 20~70g

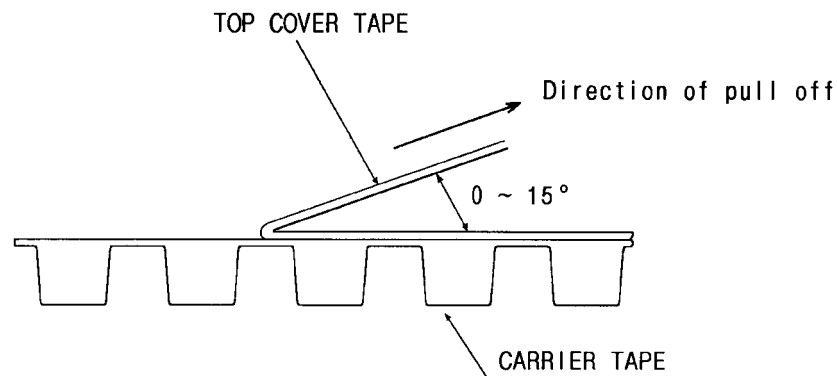

[Figure 1] Carrier Tape Dimensions

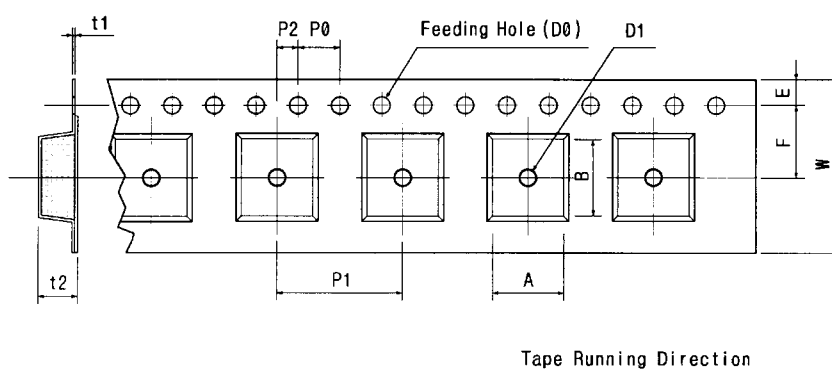


[Unit:mm]

| W              | F             | E             | P0            | P1            | P2            | D0    | D1            | t1            | t2            | A             | B             |
|----------------|---------------|---------------|---------------|---------------|---------------|-------|---------------|---------------|---------------|---------------|---------------|
| 12.00<br>±0.30 | 5.50<br>±0.10 | 1.75<br>±0.10 | 4.00<br>±0.10 | 8.00<br>±0.10 | 2.00<br>±0.10 | Ø1.50 | Ø1.0<br>±0.25 | 0.25<br>±0.05 | 1.65<br>±0.10 | 4.04<br>±0.10 | 4.10<br>±0.10 |

[Figure 2]

[Unit:mm]

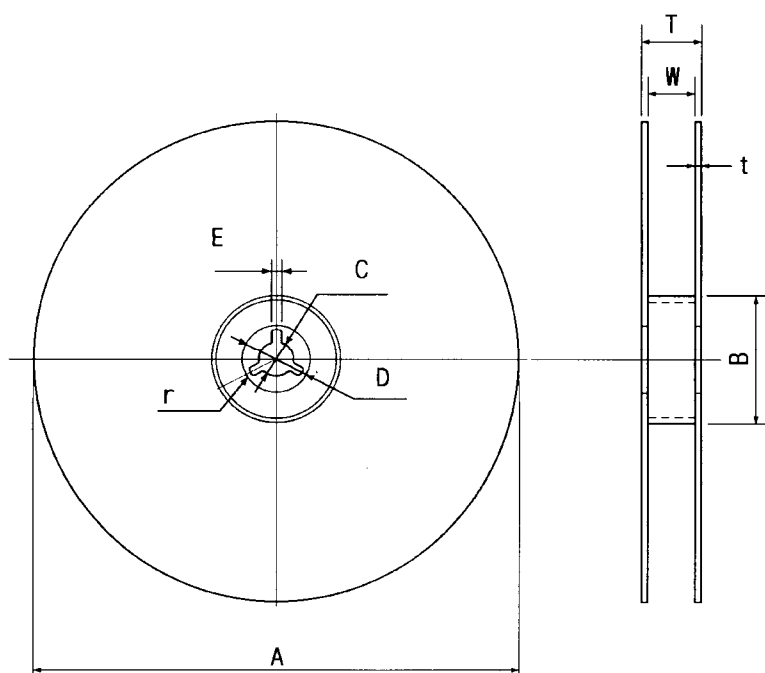

| A            | B            | C           | D           | E         | W          | t         | r           |
|--------------|--------------|-------------|-------------|-----------|------------|-----------|-------------|
| Ø330<br>±1.0 | Ø100<br>±0.5 | Ø13<br>±0.5 | Ø21<br>±0.8 | 2<br>±0.5 | 13<br>±0.3 | 3<br>max. | 1.0<br>max. |