

规格书编号

SPEC NO :

产品规格书

SPECIFICATION

CUSTOMER 客 户: _____

PRODUCT 产 品: _____ SAW FILTER

MODEL NO 型 号: _____ HDF821A F11

PREPARED 编 制: _____ CHECKED 审 核: _____

APPROVED 批 准: _____ D A T E 日 期: _____ 2006-5-11

客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE


无锡市好达电子有限公司
Shoulder Electronics Limited

更改历史记录 History Record

更改日期 Date	规格书编号 Spec. No.	产品型号 Part No.	客户产品型号 Customer No.	更改内容描述 Modify Content	备注 Remark

1. Package Dimension

Unit:mm

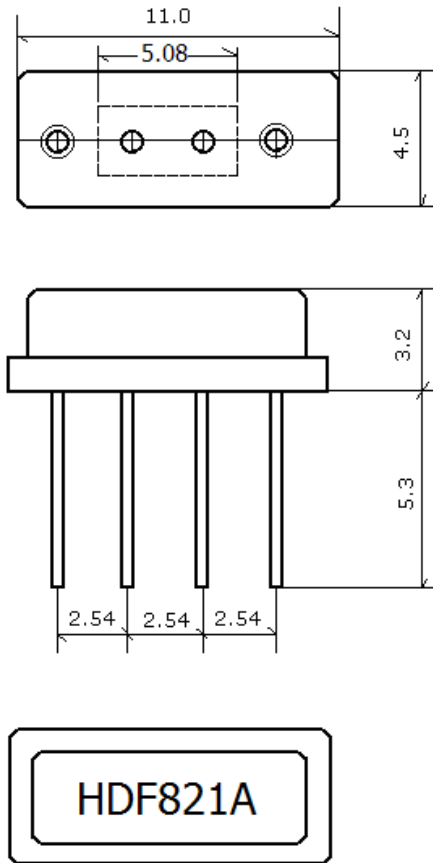

2. Marking HD F821A

2.1 Color: Black or Blue

2.2 821: Center Frequency(MHz)

3.Performance

3.1Application

Low-Loss SAW Filter of cordless system.

Center Frequency:821MHz


3.2Maximum Rating

Operation Temperature Range	-40℃ to +85℃
Storage Temperature Range	-40℃ to +85℃
DC. Permissive Voltage	0 V DC. max.
Maximum Input Power	5 dBm


3.3 Electronic Characteristics

Item	Specification
Center Frequency(f_0)	821 MHz
Insertion Loss(dB)	
1.819-823 MHz	4.5max
2.)770-780 MHz	40 min
3.)795-800 MHz	30 min
4.)841-850 MHz	20 min
5.)866~900MHz	40 min
Ripple deviation (819-823MHz)(dB)	1.5max
Input/output Impedance(Nominal)	50 Ω

3.4 Frequency Characteristics

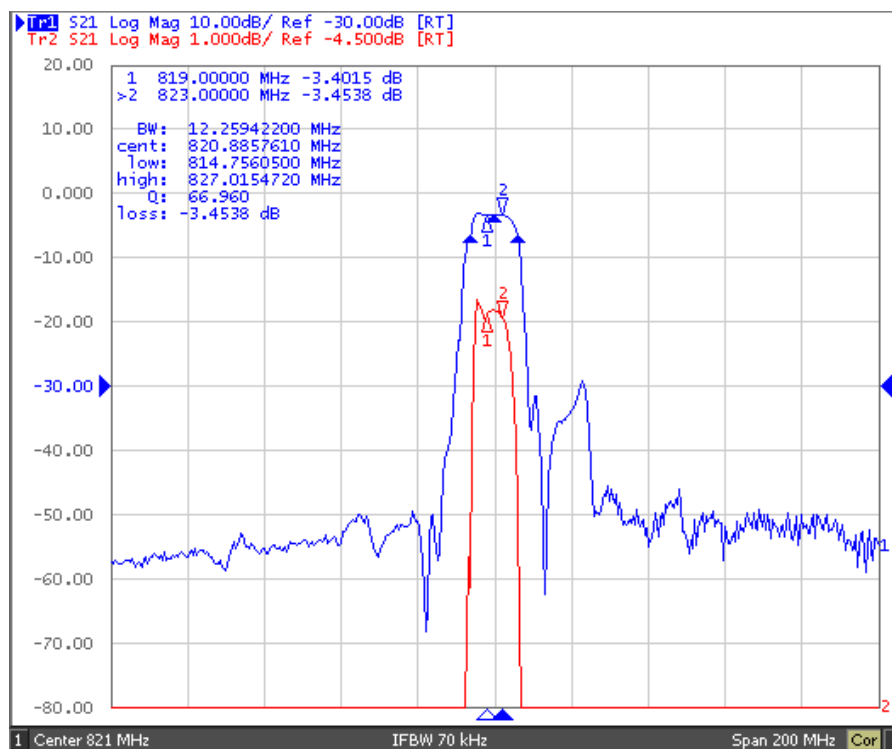

3.5 Test Circuit

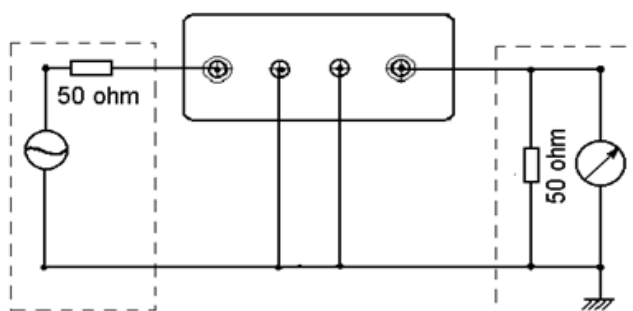

4. ENVIRONMENTAL CHARACTERISTICS

4-1 High temperature exposure

Subject the device to +85℃ for 16 hours. Then release the filter into the room conditions for 24 hours prior to the measurement. It shall fulfill the specifications in 3.3.

4-2 Low temperature exposure

Subject the device to -40℃ for 16 hours. Then release the device into the room conditions for 24 hours prior to the measurement. It shall fulfill the specifications in 3.3.

4-3 Temperature cycling

Subject the device to a low temperature of -40℃ for 30 minutes. Following by a high temperature of +80℃ for 30 Minutes. Then release the device into the room conditions for 24 hours prior to the measurement. It shall meet the specifications in 3.3.

4-4 Resistance to solder heat

Dip the device terminals no closer than 1.5mm into the solder bath at 260℃ $\pm 10^{\circ}\text{C}$ for 10 ± 1 sec. Then release the device into the room conditions for 4 hours. The device shall meet the specifications in 3.3.

4-5 Solderability

Subject the device terminals into the solder bath at 245℃ $\pm 5^{\circ}\text{C}$ for 5s, More than 95% area of the terminals must be covered with new solder. It shall meet the specifications in 3.3.

4-6 Mechanical shock

Drop the device randomly onto the concrete floor from the height of 1m 3 times. the device shall fulfill the specifications in 3.3.

4-7 Vibration

Subject the device to the vibration for 1 hour each in x,y and z axes with the amplitude of 1.5 mm at 10 to 55 Hz. The device shall fulfill the specifications in 3.3.

5. REMARK

5.1 Static voltage

Static voltage between signal load & ground may cause deterioration & destruction of the component. Please avoid static voltage.

5.2 Ultrasonic cleaning

Ultrasonic vibration may cause deterioration & destruction of the component. Please avoid ultrasonic cleaning

5.3 Soldering

Only leads of component may be soldered . Please avoid soldering another part of component.