

SPECIFICATION


1. SCOPE

This specification is applied to the piezoelectric diaphragm.

2. SPECIFICATION

(at 25°C)

2.1 Resonant Frequency	:	2.5 ± 0.3 KHz
2.2 Resonant Resistance	:	500 Ω max
2.3 Capacitance	:	50000 pF ± 30% at 100 Hz
2.4 Input Voltage	:	30 Vp-p max
2.5 Operating Temperature	:	-20 ~ +50 °C
2.6 Storage Temperature	:	-20 ~ +60 °C
3. Dimension	:	as per figure

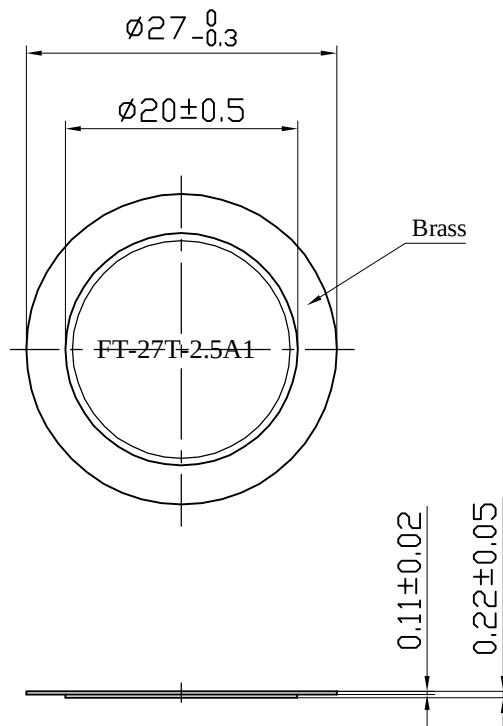


TOLERANCES UNLESS
NOTED OTHERWISE

.X ±
.XX ±
.XXX ±

90° FORMED +2°
ANGLES -1°

FIRST ANGLE PROJECTION



DRAWN

DESIGN

CHECKED

APPROVED

DATE

06.10.26

CONTRACT NO.

AGENCY APPROVAL

KEPO MODEL NO.

FT-27T-2.5A1

DWG NO.

OEM2380

KEPO CO., LTD.

CUSTOMER

QUARTZ

CUSTOMER NO.

VER

1.0

SCALE

UNIT

mm

SHEET

TEL: (+86) 574-88370330

FAX: (+86) 574-88370329