

1

2

3

4

受 控

SPECIFICATION

A

1. SCOPE

This specification is applied to the piezo-element.

2. SPECIFICATION


(at25℃)

2.1 Resonant Frequency	:	1.3 ± 0.5 KHz
2.2 Resonant Resistace	:	500 Ω max
2.3 Capacitance	:	60000 pF ± 30% at 100Hz
2.4 Input Voltage	:	30 Vp-p max
2.5 Operating Temperature	:	-20~+50℃
2.6 Storage Temperature	:	-20~+70℃
3. DIMENSION	:	as per figure

B

A

B

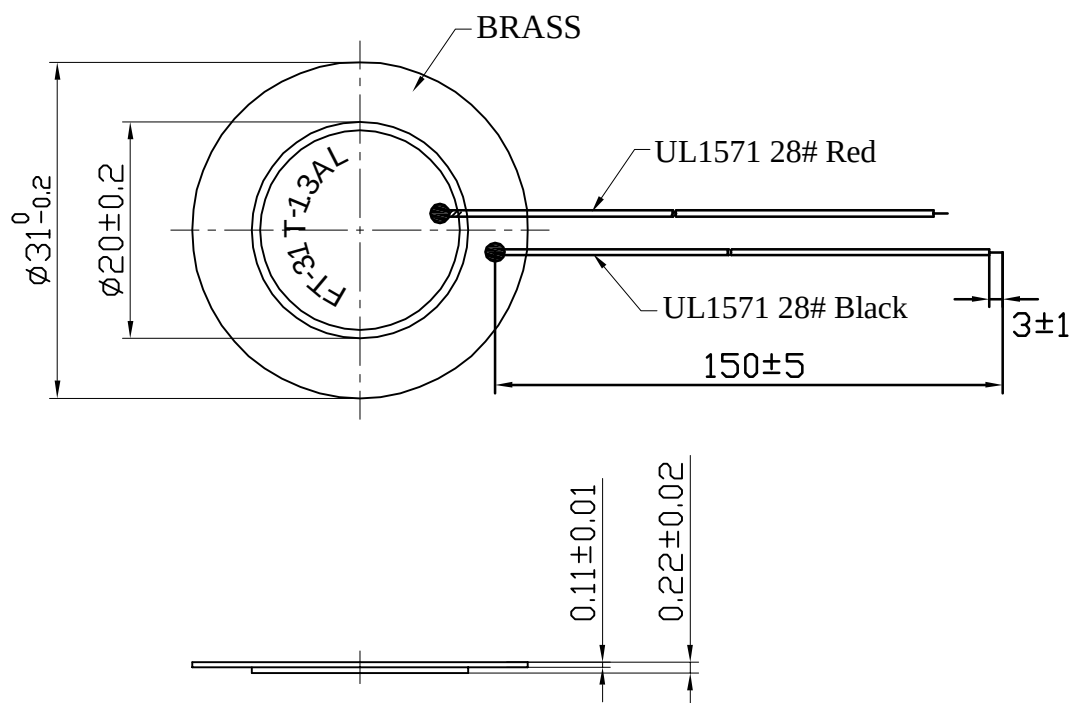

C

C

D


D

TOLERANCES UNLESS
NOTED OTHERWISE

.X ±
.XX ±
.XXX ±

90° FORMED +2°
ANGLES -1°

FIRST ANGLE PROJECTION



DRAWN

汪逸

DESIGN

CHECKED

APPROVED

徐锦生

DATE

10.12.06

CONTRACT NO.

AGENCY APPROVAL

KEPO MODEL NO.

FT-31T-1.3AL 150-1924

DWG NO.

OEM1924

KEPO CO.,LTD.

CUSTOMER

QUARTZ-1

CUSTOMER NO.

VER

1.2

SCALE

UNIT

mm

SHEET

TEL:(+86)574-88370330
FAX:(+86)574-88370329

1

2

3

4